

# AQUALISA


## EXPOSED SEQUENTIAL VALVE



LP/HP  
CHROME

---

### DIMENSIONAL DRAWINGS

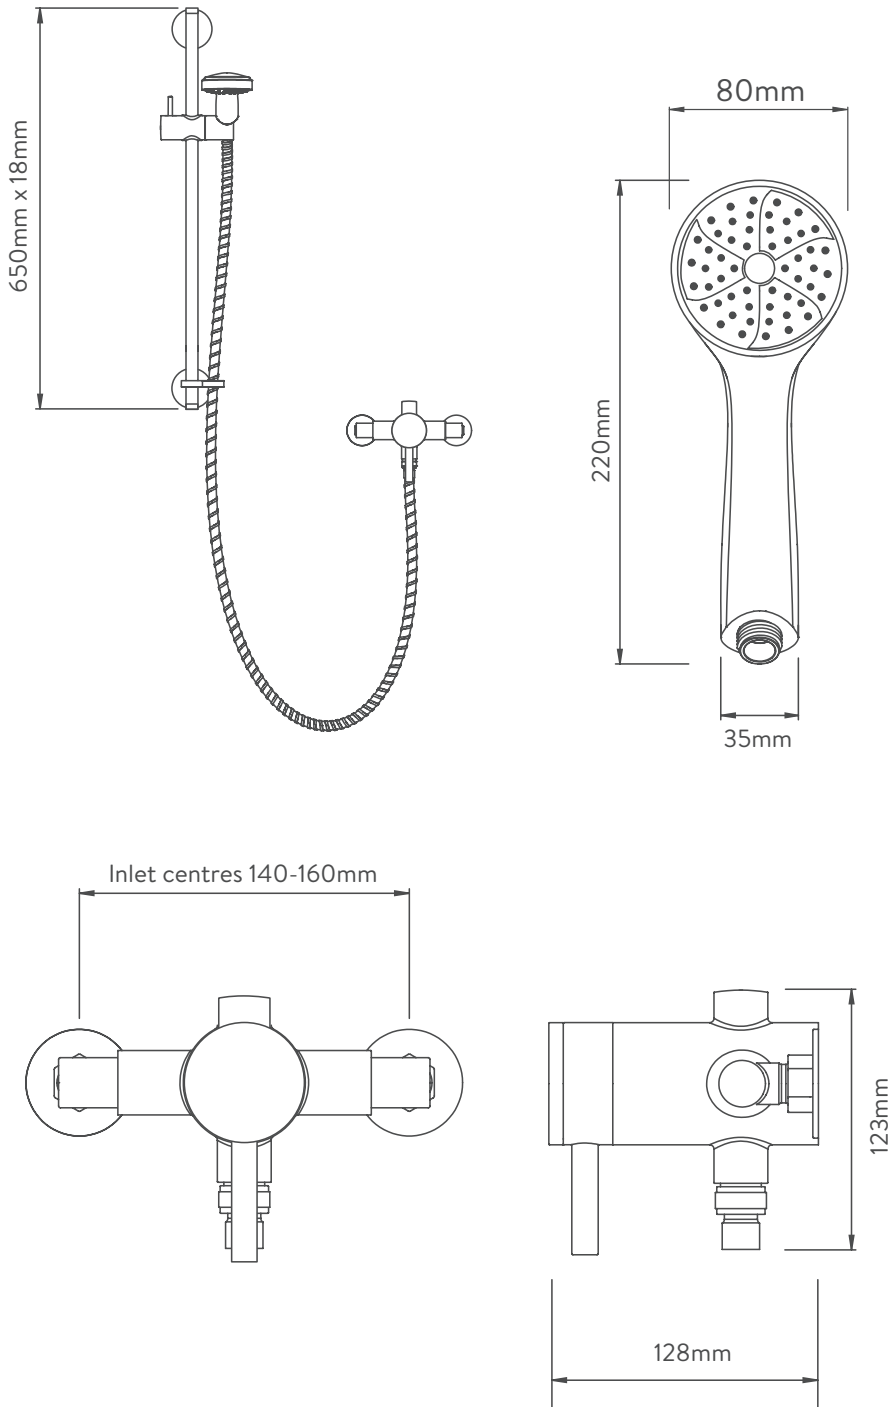

# AQUALISA

## EXPOSED SEQUENTIAL VALVE



LP/HP  
CHROME

---

### TECHNICAL SPECIFICATIONS

Minimum pressure requirements	0.1 bar
Maximum pressure requirements	5 bar
Inlet fitting connections	15mm compression
Inlet supply positions	Hot/left, cold/right
Outlet connections	1/2" BSP
Valve inlet centres	140 - 160mm
Supply temperature	Min 5°C - Recommended 10°C - 15°C Max 65°C - Recommended 60°C - 65°C
Water system	All Water Systems
Features	Single lever control
	Adjustable inlet centres for ease of fitting and retrofit
	All brass valve with metal control
	Soft rub nozzles for easy cleaning
	1 spray pattern
	1.5m chrome plated stainless steel hose (11mm bore)
Colour	Chrome
Guarantee period	5-year guarantee