


## Geberit Mapress Copper slip coupling

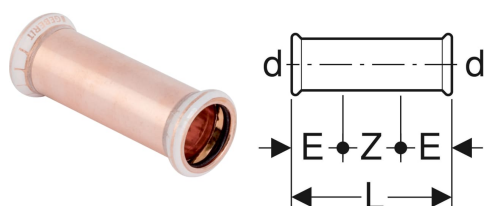

Example image

### Application purposes

- For cold and hot potable water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

### Characteristics

- Pressing indicator
- Leaky if unpressed up to  $\varnothing \leq 54$  mm
- Seal ring made of CIIR, black, up to  $\varnothing \leq 54$  mm
- Seal ring made of EPDM, black, from  $\varnothing > 54$  mm
- Pressing socket with transparent protection plug

### Technical data

Product material | Cu-DHP copper CW024A (EN 1412)

Art. no.	DN	d, $\varnothing$	E	L	Z
62102	12	15 mm	2.5 cm	8 cm	3 cm
62103	15	18 mm	2.5 cm	8 cm	3 cm
62104	20	22 mm	2.5 cm	8.4 cm	3.4 cm
62105	25	28 mm	3 cm	9.1 cm	3.1 cm
62106	32	35 mm	3 cm	10.2 cm	4.2 cm
62107	40	42 mm	4 cm	12 cm	4 cm
62108	50	54 mm	4 cm	14 cm	6 cm
62110	65	66.7 mm	5 cm	22 cm	12 cm
62111	65	76.1 mm	5.3 cm	23 cm	12.4 cm
62112	80	88.9 mm	6 cm	26 cm	14 cm
62113	100	108 mm	7.5 cm	31 cm	16 cm