

## Product Technical Sheet

# Omnicare Ultra

## Thermostatic Electric Shower

### Product Codes

Omnicare Ultra 8.7kW	CINCULT08W
Omnicare Ultra 9.8kW	CINCULT09W

### Installation

- Multiple pipe and cable entry points, a generous footprint, the Omnicare is designed with ease of replacement in mind
- The Omnicare connects to both analogue and digital waste pumps

### Commissioning

- Simple 2 minute commissioning process

### End User

- Large soft press start/stop button and low resistance control dial
- Power on illumination along with audible feedback allows ease of use for all users
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- Safe-set™ allows the maximum temperature to be set internally whilst allowing full rotation of temperature dial
- Constantly regulating water temperature within +/- 1°C, (BEAB Care standard)
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- 1.5m hose and large easy clean 5 spray pattern shower head, with removable faceplate (no tools required)



SAFETY CRITICAL  
TRITON ACCESSORY



**TRITON** | THE UK'S  
SHOWER COMPANY


See you first thing Britain

# Omnicare Ultra

## Thermostatic Electric Shower

### Shower

Temperature stability	Thermostatic +/-1°C with Tri-Therm™ (1)
Power ratings	8.7kW & 9.8kW (at 240V)
Finish	White
Adjustable max temperature	41°C, BEAB Care or Max (43°C) with Safe-Set™ (2)
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
Controls	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	½" BSP male thread for 15mm compression fitting (swivel inlet (up/down))
Terminal block	16mm² max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	1bar (running at 8 l/min) (3)
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom
Other installation aid(s)	Wall mounting template

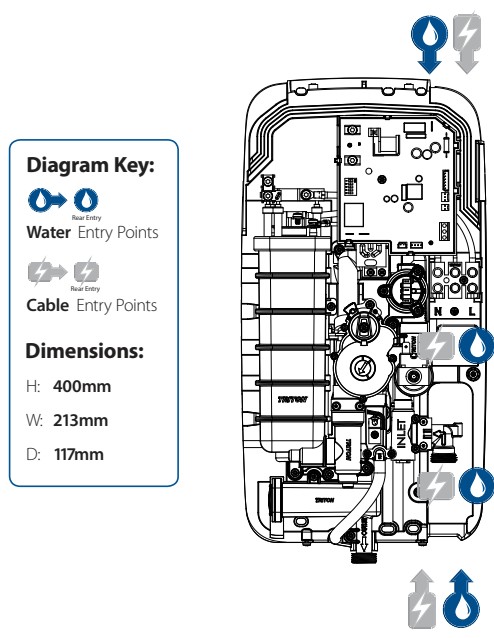

### Riser Rail Kit

#### Standard version

Length	680mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	1.5m Anti-twist Chrome

### IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period



Remote Start / Stop  
CSGPRSS



1.5m Anti-twist Hose - Chrome  
REHOSE150C



Inclusive Showerhead  
(5 Spray Pattern)  
TSHECAREWHT

Contact our specification team

Call: 02476 324 776 | Email: [specification@tritonshowers.co.uk](mailto:specification@tritonshowers.co.uk) | Web: [www.tritonshowers/specifiers](http://www.tritonshowers/specifiers)

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.  
 (2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.  
 (3) The shower will operate down to 0.5 bar at reduced flow rates.