

Omnicare Ultra+

Thermostatic Electric Shower

Product Codes

Omnicare Ultra+ 8.7kW with Extended Kit	CINCULTP08W
Omnicare Ultra+ 9.8kW with Extended Kit	CINCULTP09W
Omnicare Ultra+ 8.7kW with Grab Kit	CINCULTP08WGRB
Omnicare Ultra+ 9.8kW with Grab Kit	CINCULTP09WGRB
Omnicare Ultra+ 8.7kW with Extended Kit and Digital Waste Pump Connectivity	CINCULTPD08W
Omnicare Ultra+ 9.8kW with Extended Kit and Digital Waste Pump Connectivity	CINCULTPD09W
Omnicare Ultra+ 8.7kW with Grab Kit and Digital Waste Pump Connectivity	CINCULTPD08WGRB
Omnicare Ultra+ 9.8kW with Grab Kit and Digital Waste Pump Connectivity	CINCULTPD09WGRB

Installation

- Multiple pipe and cable entry points, a generous footprint, the Omnicare is designed with ease of replacement in mind
- The Omnicare connects to both analogue and digital waste pumps

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Power on illumination along with audible feedback allows ease of use for all users
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- Looped lever handle with low resistance operation
- Safe-set™ allows the maximum temperature to be set internally whilst allowing full rotation of temperature dial
- Constantly regulating water temperature within +/- 1°C, (BEAB Care standard)
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- Dual purpose Grab Riser Rail designed to withstand up to 150kg support load
- 2m hose and a lower level handset holder offered with the Grab Riser Rail, providing flexibility for seated or standing showering
- Large easy clean 5 spray pattern shower head with removable face plate (no tools required)



SAFETY CRITICAL
TRITON ACCESSORY

Omnicare Ultra+

Thermostatic Electric Shower

Shower

Temperature stability	Thermostatic +/-1°C with Tri-Therm™ (1)
Power ratings	8.7kW & 9.8kW (at 240V)
Finish	White
Adjustable max temperature	41°C, BEAB Care or Max (43°C) with Safe-Set™ (2)
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
Controls	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	½" BSP male thread for 15mm compression fitting (swivel inlet (up/down))
Terminal block	16mm² max cable
Waste pump connection(s)	Analogue & Digital (wired)
Water supply	Mains cold water
Water pressure min	1bar (running at 8 l/min) (3)
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom
Other installation aid(s)	Wall mounting template

Diagram Key:

 Water Entry Points


 Cable Entry Points

Dimensions:

H: 400mm

W: 213mm

D: 116mm

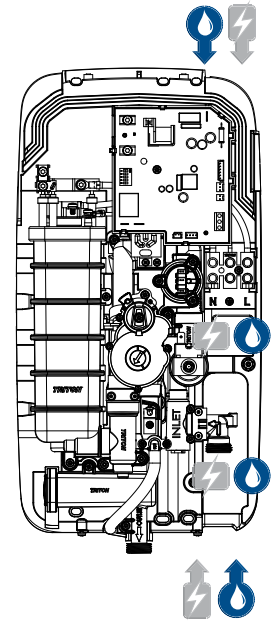

Riser Rail Kit

Extended Kit Option

Length	1080mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	2m Anti-twist Chrome

Grab Kit Option

Length	1100mm
Material	Stainless Steel
Finish	Polished
Support load (max)	150kg
Fixing brackets	5 fixing points / 70mm diameter
Hose	2m Anti-twist Chrome



Remote Start / Stop
CSGPRSS



2m Anti-twist Hose - Chrome
TSHG1266



Inclusive Showerhead
(5 Spray Pattern)
TSHECAREWHT

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers/specifiers

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.

(2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.

(3) The shower will operate down to 0.5 bar at reduced flow rates.