



Delta Twin Angled TRV Chrome Thermostatic Radiator Valve



Available Finishes

Chrome

Connection Size

Valve to Radiator	1/2" BSPT
Valve to Pipe	15 mm Compression

Allen Key size

To adjust Lock-Shield	6mm
To fit Coupler to Radiator	12mm
Allen Keys are not included	

Pressure Ratings

Max Test Pressure	16 Bar
Max Operating Pressure	10 Bar
Max Differential Pressure	1 Bar
Pressure Drop Value (Kvs)	1.1m ³ /h

Kvs value is the metric measure for the flow of a fully opened valve. It is defined as: The volume flow in cubic metres per hour of water at a temperature of between 5° and 40° Celsius with a pressure drop across the valve of 1 bar.

Flow Ratings

Normal Flow Rate	0.36 m ³ /h
Max Flow Rate	1.1 m ³ /h

Temperature Ratings


Max Test Temperature	100°C
Max Operating Temperature	120°C
Temperature Adjustment Range	7~32°C

Disclaimer

All dimensions are approximate and for roughing in only.
We recommend no work be carried out until the goods arrive.
We can take no responsibility for errors in information supplied.



Delta Twin Angled TRV Chrome Thermostatic Radiator Valve

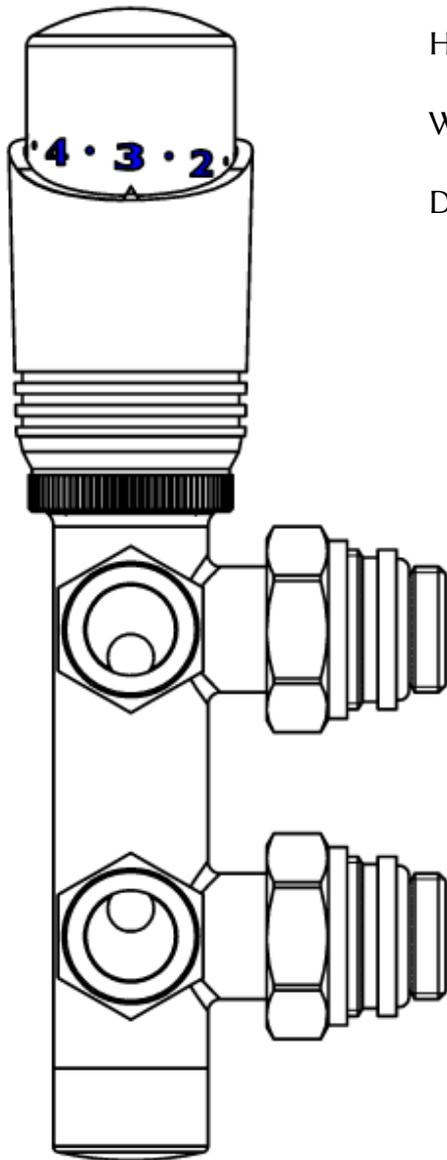

Height – 65mm

Width – 190mm

Depth – 55mm

