

E-COMBI LPG



The stylish E-Combi LPG comes with a brilliant white fascia and a host of high-end features, including the energy saving 'Auto' function and the easy to use backlit display.

- / XTRATECH™ stainless steel heat exchanger
- / High domestic hot water flow rates
- / 'Auto' function technology
- / Comfort function
- / High efficiency pump
- / 1:7 modulation
- / Quiet operation starting at 49dB
- / Lightweight unit starting at 29kg
- / 2 year warranty
- / 'A' ErP rated for optimum energy efficiency
- / Large backlit display
- / Includes LPG conversion kit
- / Ariston NET compatible

ENERGY RATING



XtraTech™
stainless-steel heat exchanger



PERFORMANCE
CERTIFIED BY
TÜV RHEINLAND
GROUP



TECHNICAL DATA

24

30

Efficiency

	Rating	24	30
ERP rating - heating/DHW		A/A	A/A
ERP data - seasonal space heating efficiency	%	93	94
ERP data - water heating energy efficiency	%	85	83
ERP data - noise level	dB	49	50
ERP data - tapping profile	-	XL	XL
SEDBUK rating	Band	A	A
SAP efficiency 2005	%	91.8	91.9
SAP efficiency 2009/2012	%	90.3	90.3

Power & Performance

		24	30
DHW flow rate ΔT @ 35°C	l/min	10.6	12.2
Heat output max (CH)	kW	21	27
Min/Max heating temperature (high temp. range)	°C	35/82	35/82
Min/Max heating temperature (low temp. range)	°C	20/45	20/45
DHW temperature min/max	°C	36/60	36/60

Characteristics


		24	30
Minimum ambient temperature	°C	5	5
DHW minimum flow rate	l/min	2	2
DHW pressure - min/max	bar	0.2/7.0	0.2/7.0
Built-in expansion vessel capacity	l	8	8
Servicing clearances - top/front/bottom	mm	350/450/300	350/450/300
Servicing clearances - left/right	mm	5/5	5/5
Weight	kg	29.7	32.3
NOx	mg/kWh	44	44

Electrical Data

		24	30
Electrical supply	V/Hz	230/50	230/50
Protection grade of electrical system	IP	X5D	X5D

Product Codes

3301445 3301446

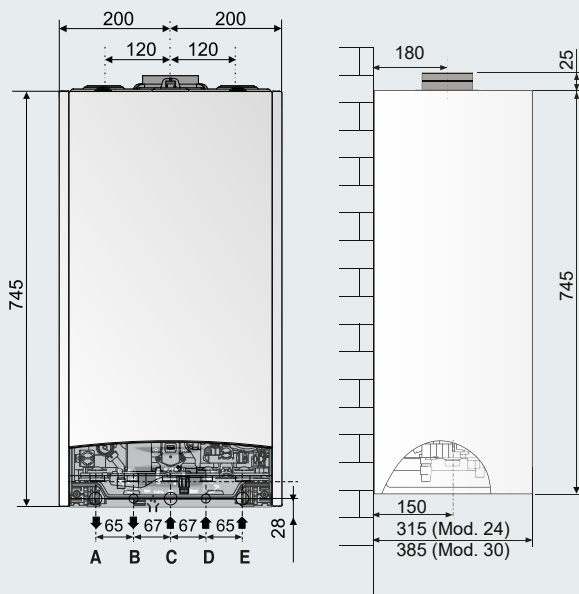

KEY

- A \ Central heating flow
- B \ Domestic hot water outlet
- C \ Gas inlet
- D \ Domestic cold water inlet
- E \ Central heating return