


Geberit Type 380AG fill valve, lateral water supply connection, 3/8", nipple made of brass

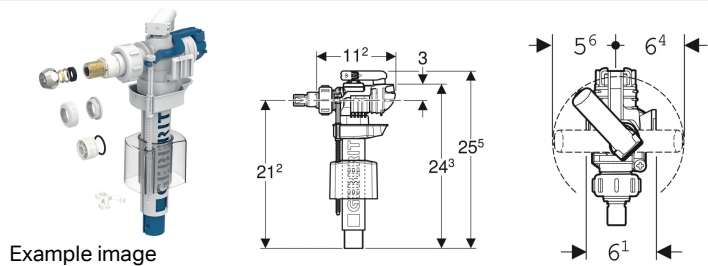

Example image

Application purposes

- For Geberit AquaClean Mera WC complete solutions floor-standing WC
- For installation in exposed cisterns with lateral water supply connection
- For ceramic cisterns
- For greywater (rainwater) with pH value 6.0–9.5, if a filter system is used
- For potable water

Characteristics

- Adjustable filling height

Scope of delivery

- Adapter for nipple, for Type 350 fill valve

- Threaded nipple made of brass
- Water supply connection on the left/right
- Backflow prevention type AG (free outlet with overflow)
- Fulfils requirements in accordance with BS 1212-4:2016, WRAS Section 2075

Technical data

Flow pressure	0.1-10 bar
Maximum storage temperature	40 °C
Maximum operating temperature, water	25 °C

Art. no.	B	H	T
244.510.00.1	6.1 cm	25.5 cm	11.2 cm

- Cone screw fitting