

EHPT20X-MEHEW

FTC7 **Packaged** Cylinder
For Ecodan Monobloc Units

Key Features:

- A+ hot water efficiency
- Stylish and modern aesthetics
- Packaged hot water, heating and controls
- Colour touch screen control
- MELCloud enabled

Key Benefits:


- Minimised energy consumption
- Flexible product placement
- Plug and play simple installation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support



Manufactured in the UK



MELCloud

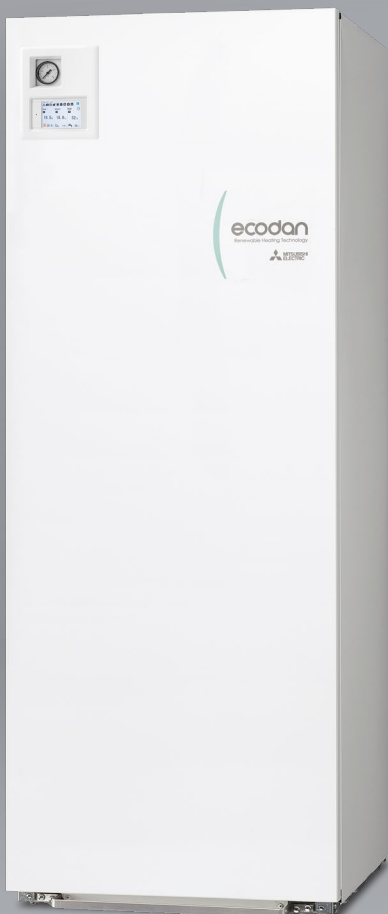


ecodan[®]
Renewable Heating Technology

CYLINDER		EHPT20X-MEHEW	
NOMINAL HOT WATER VOLUME (LITRES)		200	
HEAT PUMP COMBINATION HEATER - Large Profile (Average Climate) ErP Rating		A+	
OPERATING AMBIENT TEMPERATURE (°C DB)		0 ~ +35°C (RH<80%)	
SOUND PRESSURE LEVEL AT 1M (dBA)		28	
WATER DATA		Flow Rate (l/min) - (H)WM 50 / 60 / 80 / 85 / 112 / 140 14/17/23/24/32/40	
		Primary Circuit Pump Grundfos UPM3 15-75 130	
		Sanitary Hot Water Pump Grundfos UPSO 15-60 130	
		Connection Size (inch) Heating / DHW G1 / G3/4	
WATER SAFETY DEVICES		Heating Water Circuit Control Thermistor (°C) 80	
		Flow Sensor (minimum flow 5L/min) Supplied	
		DHW Cylinder Control Thermistor (°C) 75	
		Temp and Pressure Relief Valve (°C)/ (MPa (Bar)) 90 / 0.7 (7)	
DIMENSIONS (mm)		Width 595	
		Depth 680	
		Height 1600	
WEIGHT EMPTY / FULL (kg)		81 / 287	
ELECTRICAL DATA		Control Board - Electrical Supply 220-240v, 50Hz	
		Phase Single	
		Fuse Rating - MCB Sizes (A)*1 10	
		Immersion Heater Electrical Supply 220-240v, 50Hz	
		Phase Single	
		Capacity (kW) 3	
		Max Running Current (A) 13	
		Fuse Rating - MCB Sizes (A)*1 16	
MECHANICAL ZONES		DHW and 1 Heating Zone*2	
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E and PAR-WR61R-E Receiver	

*1 MCB Sizes BS EN60898-2 & BS EN60947-2 *2 Optional 2 zone accessory pack available

Notes: Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Pumps & Valves for Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater.

EHPT20X-MEHEW DIMENSIONS

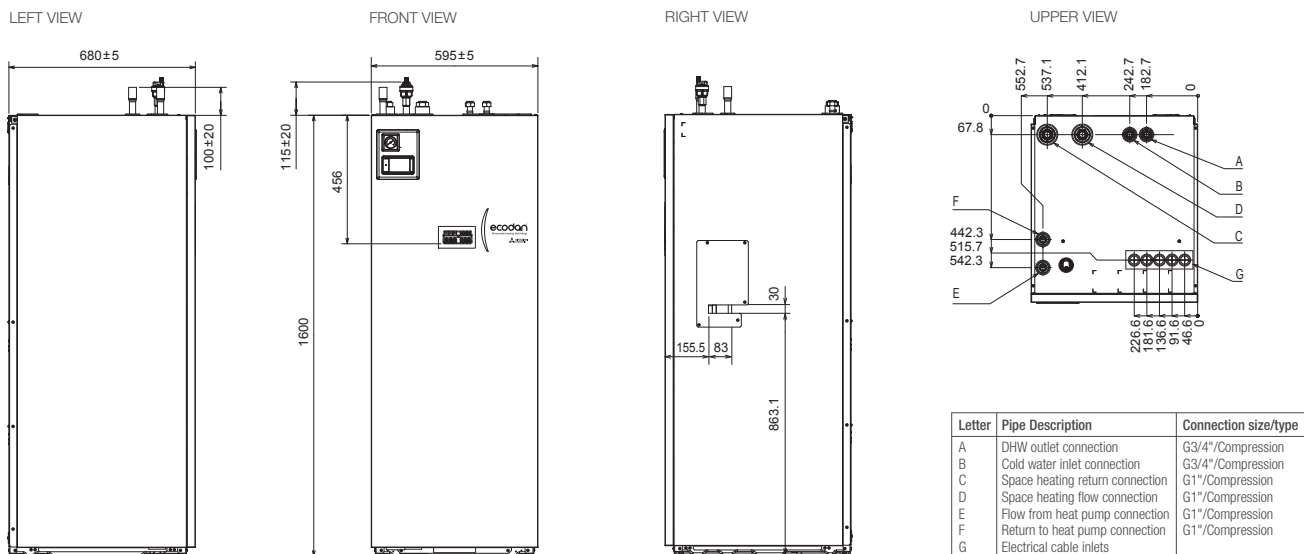

Telephone: 01707 282880
email: heating@meuk.mee.com
ecodan.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2023. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: Refer to 'Installation Manual' and 'Instruction Book' for further 'Technical Information'. The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of October 2023

