



### Applications


Designed to cater for the varied automated flushing requirements of small and large urinal W.C installations

### Features

- ~ Manufactured in the UK from high quality materials
- ~ Conforms to BS 1876
- ~ Available in 2 outlet sizes: 1" and 1¼"
- ~ WRAS Approved
- ~ Inexpensive, trouble-free and simple to install
- ~ No moving parts - requires virtually no maintenance
- ~ Supplied complete with two rubber washers and nut
- ~ Each syphon is fully tested before leaving the factory



### Dimensional Data

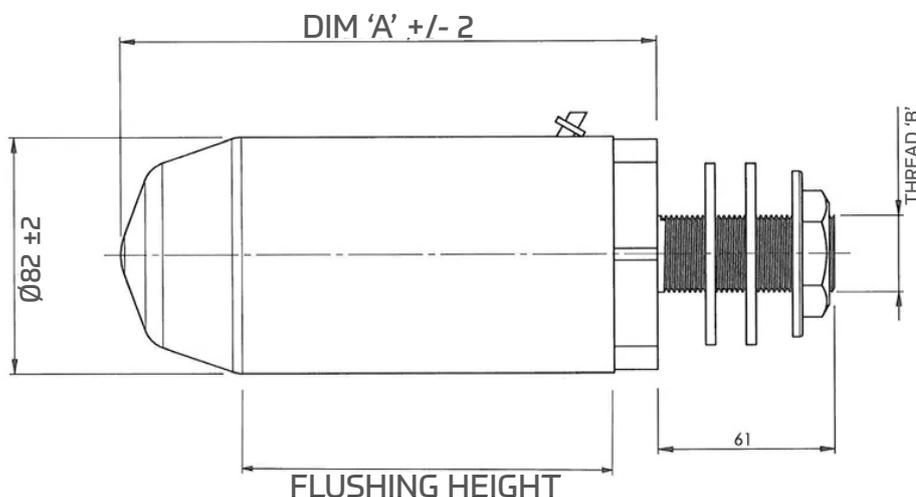

Size/Flushing Height
140mm (5½") – 1" BSPT
140mm (5½") – 1¼" BSPT
159mm (6¼") – 1" BSPT
159mm (6¼") – 1¼" BSPT
191mm (7½") – 1" BSPT
191mm (7½") – 1¼" BSPT
210mm (8¼") – 1" BSPT
210mm (8¼") – 1¼" BSPT
235mm (9¼") – 1" BSPT
235mm (9¼") – 1¼" BSPT

### Technical Data

Standard	BS 1876
Outlet	1" and 1¼"
Flush Volume	4.5 Litre [1 gallon], 9 Litre [2 gallon], 13.5 Litre [3 gallon], 18 Litre [4 gallon] & 22.5 Litre [5 gallon]