



## Split Conduit - Black




### Product description:

This corrugated conduit is used to isolate underfloor heating flow pipes between the manifold and the subsequent room being heated.

It can also be used for general protection for cables for office and private applications.

This one-piece corrugated conduit can be easily retrofitted to an existing pipe. To begin the installation, open the conduit and insert the pipe so that the pipe is covered and the split is closed.

Product Code	Type	Outside mm	Inside mm	Coil Content	Coil Weight	Pallet Quantity
719 19 123	19	23.9mm	19.2mm	25m	0.90kg	40 coils / 1000m

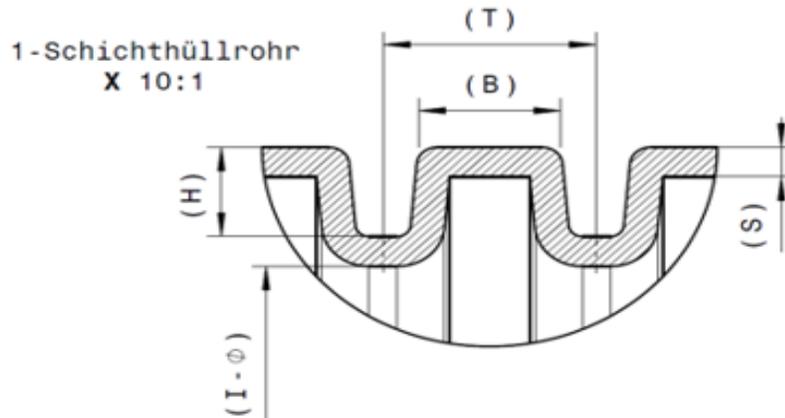

### Schutzrohr-1 Schichten, Anlagen: 451 und 457

DN	(A-φ)	(I-φ)	(S) min	(T)	(B)	(H)	Gewicht <sup>5</sup> / <sub>6</sub>	
19	23,9±0,3	19,2±0,3	0,3	3,3	2,2	2,0		

