

Environmental

FEATURING
THE NEW 9000 LITRE
FUELMASTER AND TANK
MONITORING SYSTEM (TMS)

TITAN FuelMaster

Secure Fuel Storage and Dispensing



Sustainable, Reliable, Affordable



Kingspan®

Secure Fuel Storage & Dispensing for Agricultural & Commercial Applications

With the TITAN FuelMaster from Kingspan Environmental you are not only preventing any potential spill, you are also protecting your diesel by housing the equipment and securing access to the fuel with a lockable cabinet. With the ever increasing fuel prices, supplies are now regularly targeted by thieves.

Fuel dispensing tanks in commercial, agricultural or industrial properties must be bunded. This is enforced in GB (by the Control of Pollution regulations) and encouraged in Ireland by County Councils to protect the environment and your business. Large fines and the cost of a clean-up can be severe, so its time to protect your fuel storage with the ultimate bunded solution.

Protect your fuel. Protect your profits!

- **SAFE.** Secure, lockable method of dispensing fuel.
- **DOUBLE SKIN MEANS DOUBLE PROTECTION.** It is more difficult to access the inner tank. Complies with and exceeds all current legislation.
- **MANAGE YOUR FUEL. FLOW METER CAN BE FITTED TO ALL MODELS** as optional extra. Comes as standard on the 3500, 5000, 9000 and 10000 litre capacities.
- **PROTECT YOUR ENVIRONMENT!!** You are responsible for any spills into drains and water courses. Clean up costs can run into millions of pounds.
- **Non-gravity feed,** along with access to a lockable cabinet to activate the integral pump, adds to the **SECURITY OF THE TANK.**
- **OFTEC APPROVED.**
- **10 YEAR GUARANTEE** on bunded FuelMaster tanks. **1 YEAR GUARANTEE** on pump and accessories.
- **INSTALLED SIMPLY,** on a firm, flat base by a suitably qualified technician.
- Suitable for Agricultural Fuel Oil (Class A2) and Gas/Oil/Diesel (Class D).



The FuelMaster range also offers a number of standard features

- **WatchmanSonic** technology to monitor oil levels securely (excluding FMV9000 & FMV10000)
 - The **Spillstop** device to prevent overfilling and spills.
 - **Fitted light** inside dispensing cabinet for easy vision.
 - **Pump** which dispenses at 56 litres per minute as standard.
- Optional extras/specification depending on model chosen. Refer to back page for table of specifications.**



Product Range



FM1300

Capacity 1300 litres/
285 Gallons
Length 1890 mm
Width 1245 mm
Height 1785 mm

OFCERT No. 0642090326



FM2500

Capacity 2500 litres/
550 Gallons
Length 2430 mm
Width 1420 mm
Height 1855 mm

OFCERT No. 0642069817



FM3500

Capacity 3500 litres/
775 Gallons
Length 2080 mm
Width 2680 mm
Height 1900 mm

OFCERT No. 0642030601



FM5000

Capacity 5000 litres/
1100 Gallons
Length 3140 mm
Width 2070 mm
Height 2335 mm

OFCERT No. 06420970130



FMV5000

Capacity 5000 litres/
1100 Gallons
Length 2230 mm
Width 2890 mm
Height 2420 mm

OFCERT No. 0642060236



FMV9000

Capacity 9000 litres/
1980 Gallons
Length 3580 mm
Width 2460 mm
Height 2950 mm

OFCERT No. PENDING



FMV10000

Capacity 10000 litres/
2200 Gallons
Length 3485 mm
Width 2755 mm
Height 2825 mm

PLASTIC INNER
OFCERT No. 0642119613



INTRODUCING THE
NEW TITAN FUELMASTER
9000 LITRE FMV9000

This vertical, fully bunded storage tank with integral pump and nozzle, is a new addition to the popular FuelMaster range for the storage and distribution of diesel oil. It is designed and manufactured to ensure durability, reliability and safe storage of fuel. It has all the features of the current FuelMaster range with a 6m hose (10m hose reel optional extra), 10 micron filter as well as the New Tank Monitoring System as standard.



Application Examples



Quarry application



Haulage & distribution



Construction use



On-site use



Agricultural use

Tank Monitoring System Option


The new **TMS** (Tank Monitoring System) is now being offered as a unique optional extra on all the Titan FuelMaster products. The Tank Monitoring System is a bespoke design to control, monitor and accommodate the efficient storage and dispensing of fuel.

The **TMS** can monitor levels in the tank displaying current stock locally on screen or remotely to a central office. It can also be linked to existing management systems or building management systems.


Features include:

- Level reading
- Leak detection
- Flow metering
- Bund alarm

STANDARD
ON FMV9000



LITRES SCREEN




FLOW RATE SCREEN



LOW LEVEL SCREEN

FuelMaster Specifications


Product Codes	Capacity (Ltrs)	Pump type	Automatic Nozzle (Standard)	Flow Meter (Standard)	Hose Length (Metres)	TMS (Optional)	10 Micron Filter (Optional)
FM1300 GRR	1300	Rotary			4	•	•
FM1300 GRRFL	1300	Rotary		•	4	•	•
FM1300 GR110VAN	1300	110 volt	•		4	•	•
FM1300 GR110VANFL	1300	110 volt	•	•	4	•	•
FM1300 GR12VAN	1300	12 volt	•		4	•	•
FM1300 GR12VANFL	1300	12 volt	•	•	4	•	•
FM1300 GR230VAN	1300	230 volt	•		4	•	•
FM1300 GR230VANFL	1300	230 volt	•	•	4	•	•
FM2500 GRR	2500	Rotary			4	•	•
FM2500 GRRFL	2500	Rotary		•	4	•	•
FM2500 GR110VAN	2500	110 volt	•		4	•	•
FM2500 GR110VANFL	2500	110 volt	•	•	4	•	•
FM2500 GR12VAN	2500	12 volt	•		4	•	•
FM2500 GR12VANFL	2500	12 volt	•	•	4	•	•
FM2500 GR230VAN	2500	230 volt	•		4	•	•
FM2500 GR230VANFL	2500	230 volt	•	•	4	•	•
FMV3500	3500	230 volt	•	•	6	•	•
FM5000 GR110VANFL	5000	110 volt	•	•	6	•	•
FM5000 GR12VANFL	5000	12volt	•	•	6	•	•
FMV5000 GR230VANFL	5000	230 volt	•	•	6	•	•
FMV9000 6MHFT	9000	230 volt	•	Function in TMS	6	Standard	Standard
FMV9000 10MHRFT	9000	230 volt	•	Function in TMS	10 Hose Reel	Standard	Standard
FMV10000 HYBRID	10000	On Application	•	•	4 (6 or 8 option)	Standard	•

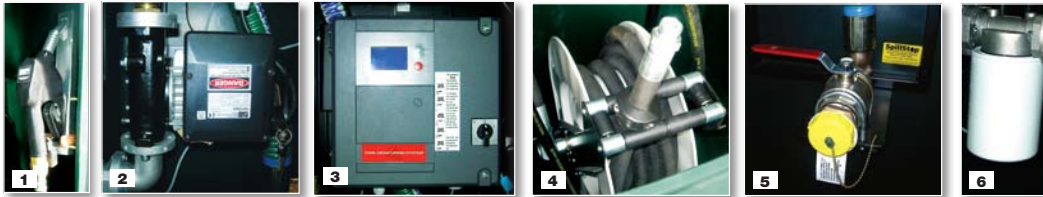

1. Nozzle & Holster
2. Pump
3. TMS Control Panel
4. Hose Reel
5. Filling Line
6. 10 Micron Filter

Images taken from FMV9000.

YOUR NEAREST STOCKIST



Kingspan Environmental Limited

Titan Environmental Team

180 Gilford Road, Portadown, Co. Armagh, Northern Ireland, BT63 5LF
 Sales Hotline Telephone: +44 (0) 28 3836 4444 Telephone: +44 (0) 28 3836 4400 Fax: +44 (0) 28 3836 4445

Dundalk Road, Carrickmacross, Co. Monaghan, Ireland
 Telephone Lo-Call (ROI): 1890 201 690 Fax Lo-Call: 1890 201 699

sales@titanenv.com or email titan@kingspanenv.com
www.titanenv.com or visit our company website www.kingspanenv.com

