


BOILER NOISE SILENCER F2

- Reduces boiler noise
- Improves heat transfer efficiency
- Compatible with all Fernox Protectors
- Non-toxic, environmentally friendly
- Can be left in the system permanently
- Compatible with all metals and materials commonly used in central heating systems

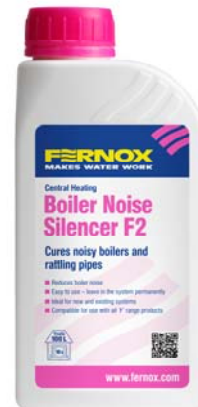

Product Uses

Fernox Boiler Noise Silencer F2 helps to reduce boiler noise. It is suitable for all types of boiler, including combination boilers and those containing aluminium components.

Physical Properties

Colour:	Pale beige
Form:	Viscous liquid
Odour:	Faint
pH:	7.0
SG:	1.08 @ 20°C

Application and Dosage

One 500 ml pack is sufficient to treat a typical central heating system. Too much treatment will not cause problems and is preferable to insufficient dosing. Severe noise may require more than one application.

For open vented systems add via the head tank. For sealed systems add via the radiator using a Fernox Injector.

For long term protection against corrosion and limescale we recommend systems are cleansed using an appropriate Fernox Cleaner F3 and then protected with a Fernox Protector F1.

In single feed indirect cylinders, e.g. 'Primatic' or similar, potable water chemicals must be used.

Packaging, Handling and Storage

Fernox Boiler Noise Silencer F2 is supplied in 500 ml bottles.

Fernox Boiler Noise Silencer F2 is classified as non-hazardous, but as with all chemicals: Keep out of reach of children. In case of contact with eyes or skin, rinse immediately with plenty of water.