



# FLOORTEC Underfloor Heating

## Cliprail Floor Specification

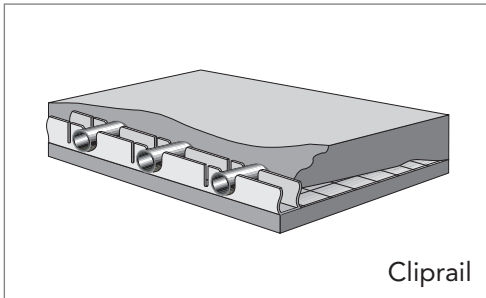

Cliprail

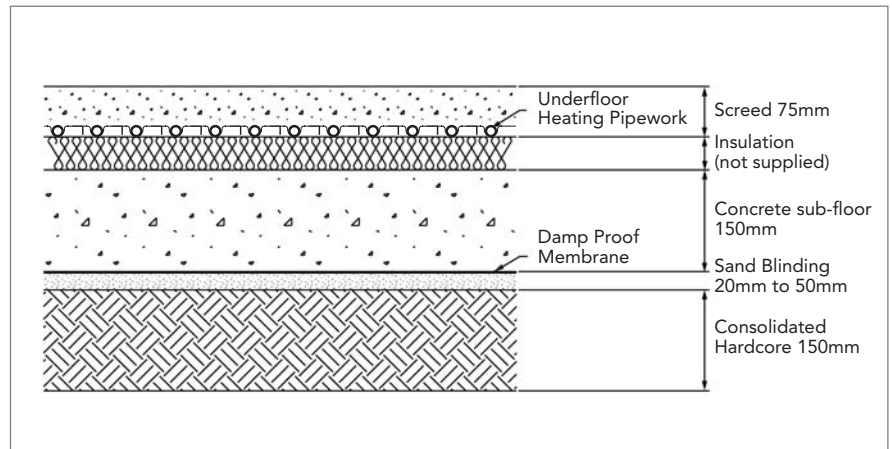

**MYSON FLOORTEC** Cliprail consists of a robust U-shaped channel in a 1 metre length, with fixing positions every 50mm to secure the **MYSON FLOORTEC** underfloor heating pipework. This is a fast and cost effective method of installing underfloor heating and is suitable for both traditional and liquid screeds. The pipe is installed in a serpentine laying pattern, therefore we recommend the hotter floor pipe is routed to any higher heat loss areas of the floor.

**MYSON FLOORTEC** underfloor heating pipework is secured using a cliprail track. This track is secured to insulation (supplied by others) using the adhesive and cliprail pins supplied. The pipe is held in place by means of pre-cut grooves in the cliprail track.

## Materials

Cliprail - 17mm x 2mm dia PE-Xa high-density cross-linked polyethylene pipework with oxygen diffusion barrier conforming to DIN 4726 and BS 7291, or 16mm multilayer pipe, clip rail, clip rail pins, manifolds (includes 17/2mm manifold couplings, 25mm ball valves, pipe bend supports, pressure gauge and automatic air vent). Insulation by others.



Cliprails



Cliprail Pins



Underfloor heating pipe