
FloPlast

HALF ROUND "CAST IRON" STYLE 112MM/68MM RAINWATER SYSTEM



www.floplast.co.uk

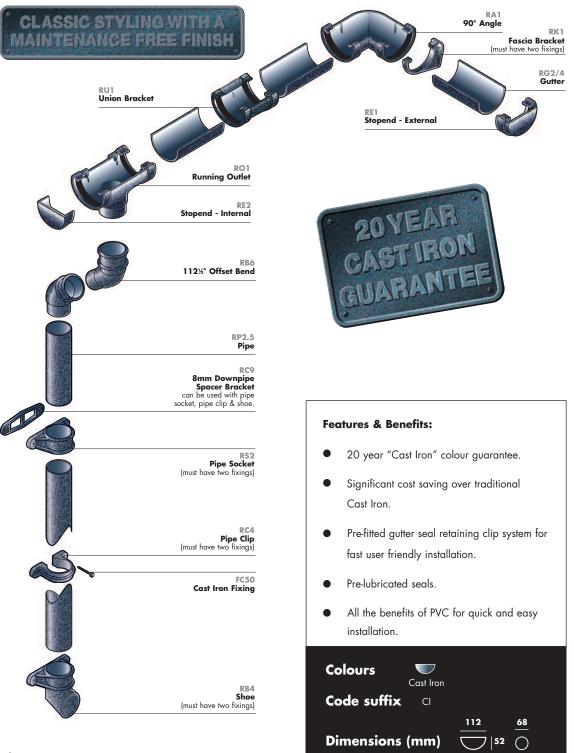

Gutter and pipe code reference numbers refer to length of run: 2 metres, 2.5 metres and 4 metres.

112mm Gutter & Fittings BS EN 607:2004, BS EN 12200-1:2000, BS EN 1462:2004

	Product	Code		Product	Code		Product	Code
-	Gutter - 4m 2m	RG4 RG2	Con-	Running Outlet - 68mm Round	RO1	S-	Union Bracket	RU1
	90° Angle	RA 1		Stopend Outlet - 68mm Round	RO2	Gutter Adaptors	:: To Cast Iron Ogee R/H	RD3
	135° Angle	RA2	5	Stopend - External	RE1		To Cast Iron Ogee L/H To Half Round	RD4
	Angle - Any degree FloPlast will fabricate any non-standard angle to	RA9	~	Stopend - Internal	RE2	. 1	Cast Iron Spare Gutter Clip	RRC1
	special order.			Fascia Bracket	RK1	For Ancillaries see po	Spare Gutter	RRS 1

68mm Round Downpipe & Fittings BS EN 607:2004, BS EN 12200-1:2000, BS EN 1462:2004

	Product	Code		Product	Code		Product
Pipe:	2.5m	RP2.5	•	67½° Branch	RY1	1	Fleur-de-l 55mm 70mm
3	Offset Bend 92½°	RB8		Access Pipe	RX 1		Tudor Ro 55mm 70mm
2	Offset Bend 112½°	RB6		Universal Hopper Connects to 65mm Square & 68mm Round downpipe	RH1	100	Decorativ 55mm
P	Shoe With Fixing Lugs (Requires 2 × FC50 fixings)	RB4	-	Ogee Hopper	RH4		70mm Lion's He
20	Pipe Clip With Fixing Lugs (Requires 2 x FC50 fixings)	RC4	V	With Fixing Lugs. (Requires 2 x FC50 fixings). Connects to 68mm Round downpipe and 65mm Square downpipe.			55mm 70mm
-	Pipe Socket With Fixing Lugs (Requires 2 x FC50 fixings)	RS2		Rectangular Hopper With Fixing Lugs. (Requires 2 x FC50 fixings) Connect to 68mm Round	RH5	Motifs can be applied to hopper using a proprietary adhesive such Polymer.	
	Cast Iron Fixings* 12 gauge x 50mm Stainless Steel fixings for "Cast Iron" Range (Socket Fixings).	FC50		downpipe and 65mm Kound downpipe. This product is rotationally moulded and subject to bowing along its length up to +/-4%.			

*Fixing instructions for the FC50 (Cast Iron fixing bolts)

The FC50 is a 12 gauge x 50mm Stainless Steel Bolt, that requires a12mm, 12 point star head socket to tighten it. When using these fixings on Ogee and Rectangular Hoppers we recommend that a 3/4" tap washer is used. When fixing product to concrete, brick, block etc fix FC50 in the same way as any other screw by using a plug type fixing, and into timber by pilot drilling a starter hole first.

