


Overflow Waste System

A 21.5mm solvent weld overflow system in PVC-U with an extensive range of fittings to meet most installation requirements.

Fixing Guide

- Fix pipe brackets at maximum 0.6m centres for both vertical and horizontal runs.
- No expansion gap required on the solvent weld overflow system.
- Solvent weld joints in accordance with ABS/PVC-U Waste Systems instructions.

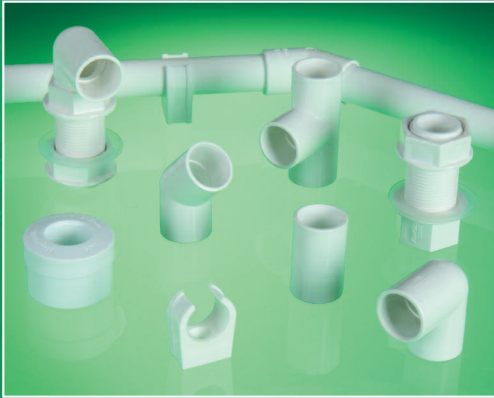


21.5mm Overflow Waste PVC-U Solvent

○ White ● Black

3m Overflow Pipe



Straight Coupling



90° Bend



135° (45°) Bend



Tee



Straight Tank Connector



Bent Tank Connector



Pipe Clip



Overflow Waste Reducer



Fits both pushfit and solvent weld systems



OS14
STRAIGHT TANK CONNECTOR

flexiflo Connectors

- Flexible range of connectors, suitable for a wide variety of applications.
- Will fit all pipes (PVC/Copper/Lead etc) within each specific size range.
- Elbows and Tees must not be used in underground installation situations. End Caps can be used as temporary blanking plugs.

○ Grey

Coupling



Elbow

