

Dene Mixer Range

Designed for ease of installation


A range of Installer showering products with all the necessary fittings to complete the job, from wall plugs and screws to push-fit pipe connections, from inlet filters to flow limiters.

Dene Bar Mixers

Hi-Flo UNDETHBM
Eco ECODETHBM
Cool Touch UNDETHBMCT



- Suitable for all systems including gravity
- Quality construction including all metal handles
- Durable ceramic disc flow control
- Supplied with Dene Shower Kit - details overleaf

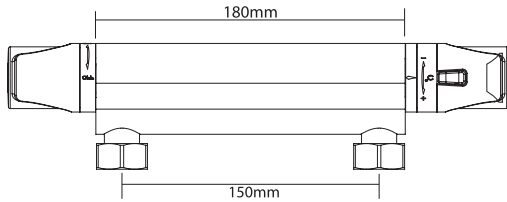

Specification:

Temperature Control	Thermostatic
Flow Control	Ceramic disc (quarter turn)
Inlet Connections	15mm push-fit (fixings to pipe) 3/4" flat face union (valve to fixings)
Minimum Running Pressure/Flow	0.1 bar at 8 l/min


	High Flow	Eco	Cool Touch
Specifications:	5 l/min at 0.1bar (1m)	6 l/min max official rating	Cool Touch valve body
Benefits:	Ideal for gravity systems	Factory fitted flow limiter	Ideal for families



Dene Bar Diverter Mixer

UNDETHBMDIV

- Diverts between fixed shower head and handset
- Quality construction including all metal handles
- Large diameter pivot shower head
- Handset is height adjustable for families

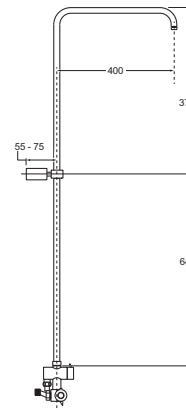

Specification:

Temperature Control	Thermostatic
Flow Control	Ceramic disc (quarter turn)
Inlet Connections	15mm push-fit (fixings to pipe) 3/4" flat face union (valve to fixings)
Minimum Running Pressure/Flow	0.5 bar at 8 l/min



Both products are supplied complete with popular surface fixing brackets



- Push-fit onto 15mm copper or plastic pipe tails
- Wall plugs/screws & water filters included

For more information call +44 (0) 844 980 1750

Dene Bath Shower Mixer

UNDEBSM




- Diverts between bath and handset
- Durable design including ceramic disc flow control
- Easy to operate quarter turn controls

- Extended 1.75m hose offers additional reach
- Manual temperature control
- Supplied with 3 spray rub clean shower head and bracket

Specification:

Temperature Control	Manual
Flow Control	Ceramic disc (quarter turn)
Inlet Connections	3/4" BSP male threaded inlets for braided hose or rigid tap connectors
Minimum Running Pressure/Flow	0.1 bar at 8 l/min (each tap)



Dene Sequential Mixer


UNDETHEXSQM



- Single control for temperature adjustment with constant flow
- Suitable for all systems including gravity
- Wall fixing plate with 4 fixing hole options
- Supplied with Dene Shower Kit - details adjacent

Specification:

Temperature Control	Thermostatic
Inlet Connections	15mm female compression (nuts & olives supplied)
Maximum Running Pressure/Flow	0.1 bar at 8 l/min

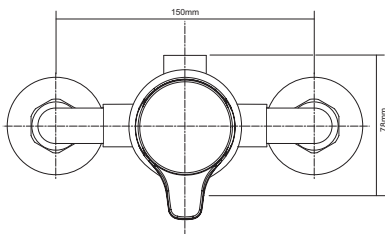

Dene Concentric Mixer


UNDETHEXCM



- Accessible forward facing controls
- Suitable for all systems including gravity
- Wall fixing plate with 4 fixing hole options
- Supplied with Dene Shower Kit - details adjacent

Specification:

Temperature Control	Thermostatic
Inlet Connections	15mm female compression (nuts & olives supplied)
Maximum Running Pressure/Flow	0.1 bar at 8 l/min

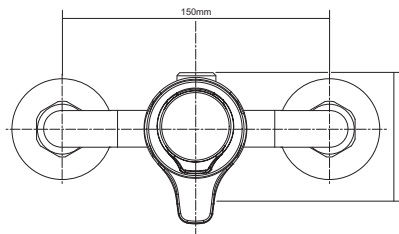

Dene Shower Kit



- Rail with adjustable top fixing bracket
- 3 spray pattern rub clean shower head
- 1.25m chrome hose



Product codes

Dene Hi-Flo Bar Mixer	UNDETHBM	Dene Bath Shower Mixer	UNDEBSM
Dene Eco Bar Mixer	ECODETHBM	Dene Sequential Mixer	UNDETHEXSQM
Dene Cool Touch Bar Mixer	UNDETHBMT	Dene Concentric Mixer	UNDETHEXCM
Dene Bar Diverter Mixer	UNDETHBMDIV		

For more information call **+44 (0) 844 980 0750**