

# T80Z Thermostatic Fast-Fit Shower

The shower that combines the benefits of the original T80Z Thermostatic with the market leading installation benefits of the T80Z Fast-Fit.

Plus Triton introduces new Dura-Flow™ technology for showers that last longer

**The T80Z Thermostatic Fast-Fit - ideal for all, whether an installer, specifier or the end-user.**



## Fast

Retro –fit	Generous footprint will cover the original T80Z Thermostatic as well as most competitor models
Entry points	8 water and 6 cable entry points make the new T80Z Thermostatic <b>Fast Fit</b>
Dual water inlet	For easy pipe connection either left or right
Separate trims	Entry trims can easily be removed and fitted <b>without tools</b> allowing a cleaner finish
Adjustable riser rail	Upper fixing bracket can be adjusted to cover any existing screw holes
Commissioning	Takes just 2 minutes

## Peace of mind

Thermostatic	Constantly regulates temperature to give the user more precise and safer showering
Tried & tested	Uses mixer wax capsule technology, no PCB required
Dura-Flow™	Reduces the build up of limescale by up to 80%. <b>Ideal for use in hard water areas</b>
Product Guarantee	Backed by Triton's 2 year <b>full</b> parts and labour guarantee
After sales	Supported by Triton's national team of engineers should you need them
Contemporary design	Stylish front plate that your clients or customers will love

## Durable

Heater	Triton's newly designed Dura-Flow™ heater technology helps to reduce the build up of limescale by up to 80%, extending the life of the shower
Showerhead	A large diameter, 5 position Dura-Flow™ showerhead that is easy to clean, with rub-clean nozzles and removable sprayplate
Filters	A Dura-Flow™ debris filter is fitted in each water inlet. Both filters are removable for cleaning <b>without disconnecting the inlet pipe</b>

## NEW HEATER CAN TECHNOLOGY

**Up to 80% less scale build up!** Extending the lifetime of the shower

DESIGNED & BUILT IN BRITAIN

NEXT DAY DELIVERY

EASY TO INSTALL

FIT AND FORGET

FULL PARTS & LABOUR GUARANTEED

TRUSTED TRITON SERVICE

For more information call **+44 (0) 844 980 0750**

[www.tritonshowers.co.uk](http://www.tritonshowers.co.uk)



YouTube

# T80Z Thermostatic Fast-Fit Shower

## Shower unit



Temperature stability	Thermostatic +/-2°C
Power ratings	8.5kW, 9.5kW & 10.5kW
Finish	White with chrome flashes
Control(s)	Separate temperature and flow controls
Visual indicators	Low flow illumination & dial markings
Dual water connection	15mm wide compression
Swingfit™ terminal block	16mm max cable
Water supply	Mains cold water
Water pressure min	1bar (running at 8 l/min)*
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

\*10.5kW: 1.5 bar (running at 11 l/min)



## Showerhead & Hose

Showerhead diameter	110mm
Spray options	5 patterns
Cleaning	Rub clean nozzles & removable spray plate
Hose length	1.25m

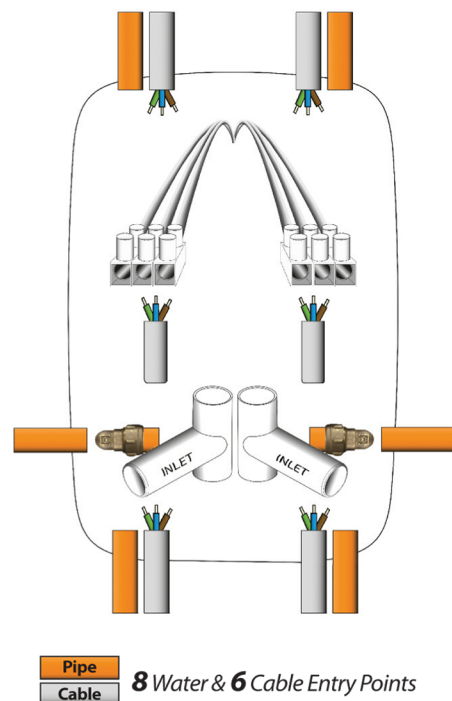

## Product codes

T80z Thermostatic Fast-Fit 8.5kW	SP8008ZFFTHM
T80z Thermostatic Fast-Fit 9.5kW	SP8009ZFFTHM
T80z Thermostatic Fast-Fit 10.5kW	SP8001ZFFTHM