

Sensorflow 21 Compact Tubular 23cm Panel Spout Integral Sensor, Mains

ILLUSTRATED

A4849 Sensorflow 21 compact tubular panel mounted 230mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, mains

ILLUSTRATED PRODUCT DETAILS

Weights

A4849 2.30 KG

Finishes

A4849  Chrome (AA)

Materials

A4849 Chrome Plated
Brass

Flow rates

A4849 3.7 Litres per minute
@ 3 bar pressure

FINISH OPTIONS




(AA) Chrome



(GN) Ultra Steel

Special Notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. The downward pointing sensor is set to work in the normal handwashing position. This helps to eliminate false triggering from high visibility clothing associated with forward facing sensors, we also do not recommend the use of Chromium plated wastes. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Mains powered transformer with option to use up to 5 link units per main unit or alternatively there are stand alone battery powered units. Flow rate regulated to 3.7 Litres per minute.

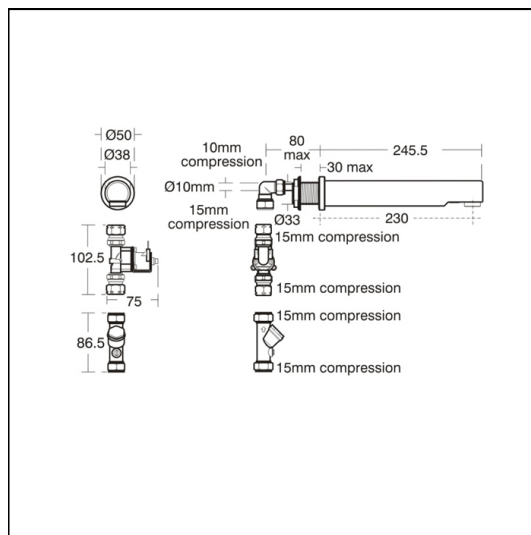

ACCREDITATIONS



Sensorflow 21 Compact Tubular 23cm Panel Spout Integral Sensor, Mains

FEATURES

