

Sensorflow 21 Compact Tubular 23cm Panel Spout Integral Sensor, Link

ILLUSTRATED

A4850 Sensorflow 21 compact tubular panel mounted 230mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, link

ILLUSTRATED PRODUCT DETAILS

Weights

A4850 2.15 KG

Finishes

A4850  Chrome (AA)

Materials

A4850 Chrome Plated
Brass

Flow rates

A4850 3.7 Litres per minute
@ 3 bar pressure

FINISH OPTIONS



(AA) Chrome




(GN) Ultra Steel

Special Notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. The downward pointing sensor is set to work in the normal handwashing position. This helps to eliminate false triggering from high visibility clothing associated with forward facing sensors, we also do not recommend the use of Chromium plated wastes. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Must link to a mains version A4846 alternatively there are stand alone battery powered units.

Flow rates regulated to 3.7 Litres per minute.

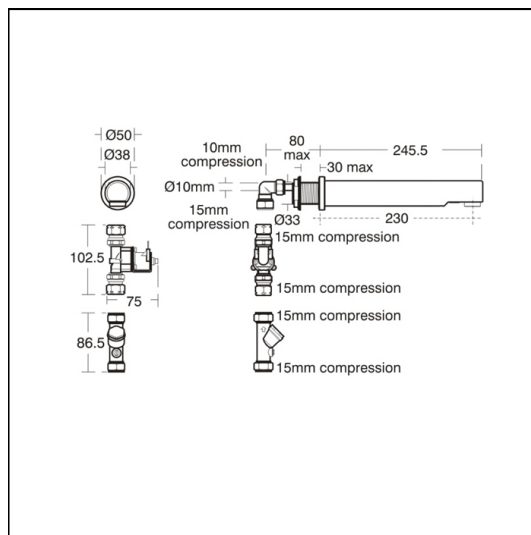

ACCREDITATIONS



3.70 Litres Per Minute

Sensorflow 21 Compact Tubular 23cm Panel Spout Integral Sensor, Link

FEATURES

