

PM2 SHCVO C

PRISM Shower Range Prism Recessed Thermostatic Dual Control Shower Valve Chrome



Features

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5° c
- Maximum hot water supply temperature is 80° c
- Fully servicable from the front

Product Certifications:

WRAS Certificate No: 1409055




Also available from the PRISM Shower Range is:



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Recessed
Temperature Control:	Thermostatic
Shower Head Type:	None
Maximum Temperature Setting: °C	42
Maximum Hot Water Temperature: °C	80
Working Pressure Range: (bar)	Min 0.2, Max 5.0
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Flow Type:	Single Flow
Flow Rate (l/min @ 3 bar)	37.4
Flow Regulator:	Yes
Connection Inlet:	15mm Compression
Connection Outlet:	Open
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

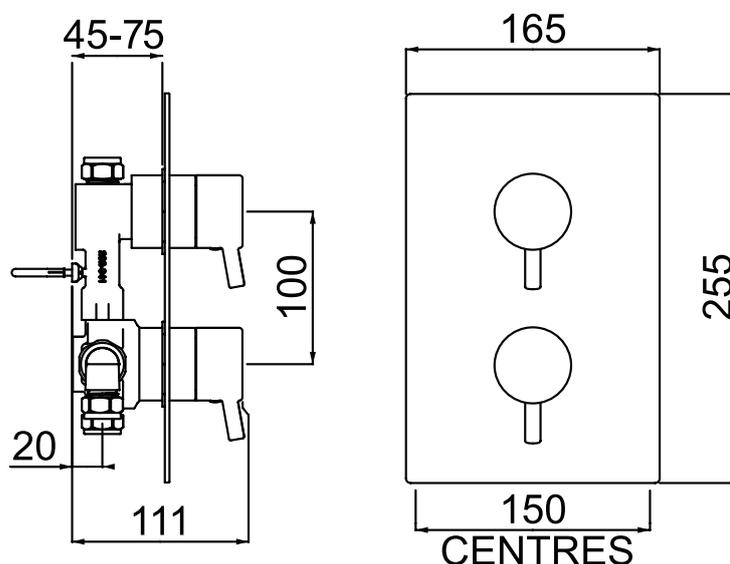

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	4	5
PM2 SHCVO C	7.5	14.1	21	30.5	37.4	43.2	48.2

**TECHNICAL
DATA
SHEET**



BRISTAN
TAPS & SHOWERS

D3