

Markwik 21+ 1 Hole Thermostatic Basin Mixer

ILLUSTRATED

A6696 (TP6) Markwik 21+ 1 hole thermostatic basin mixer, single sequential lever, demountable with copper tails

OPTIONS

A6791 Markwik 21+ deck mounted basin mixer fixing kit for use with 1 taphole Contour 21+ back outlet washbasins

ILLUSTRATED PRODUCT DETAILS

Weights

A6696 2.50 KG

Finishes

A6696  Chrome (AA)

Materials

A6696 Chrome Plated Brass


Flow rates

A6696 7.9 Litres per minute @ 3 bar pressure

Special Notes

Single sequential lever for on/off operation and temperature control. Fitted with an Armitage Bioguard outlet which reduces the opportunity for biofilm attachment and is lined with antimicrobial copper. Unique built-in thermal disinfection cleansing feature. Spout is removable for autoclave sterilisation. Body demounts for submersible disinfection. During demounting, integral safety valves will shut off water, in case supplies not isolated. Integral isolating valves, strainers, check valves and flow regulators; which are all accessible from above the basin. Temperature factory set to $40 \pm 1^\circ\text{C}$. Suitable for high and low pressure systems. Flow rate regulated to maximum of 10 litres per minute. Clamping ring with three fixing screws for added security.

Accessory fixing kit specifically designed to facilitate the installation of A6696 when used with Contour 21+ closed basins. Fits onto the tail of the basin mixer and rotates the copper tails by 90° inside the hollow basin cavity, with the inlet water connections coming from the rear.

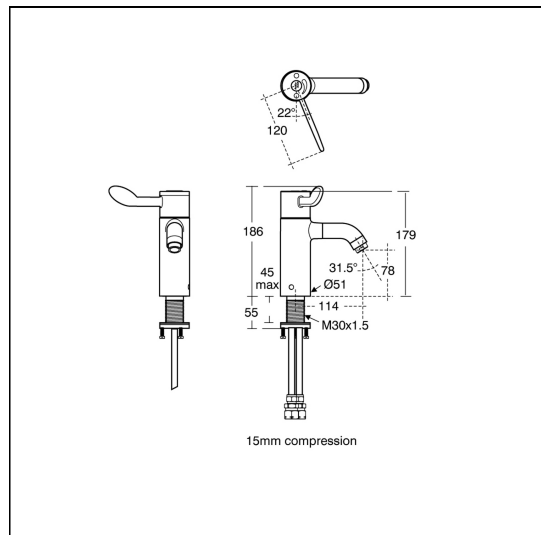

ACCREDITATIONS



1705011

FEATURES

