


Manufactured in extruded white uPVC, this quality grade material is rated to a UL94 V-0 flame spread rating. It is also resistant to both mild acids and alkalis.

Talon Pipe Cover has excellent resistance to weathering making it suitable for both interior and exterior use.

Correctly supported, Talon Pipe Cover can be used at temperatures ranging from -10°C to +60°C if in direct contact with pipe. Cover can be used with pipe heated to +80°C if not in direct contact

A wide range of accessories is available (see page 30)

Single Cover

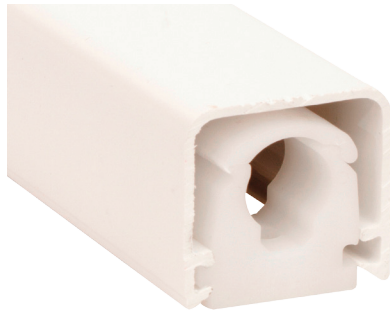

Code	Size	Length	Pack Qty
CVS15/3	15mm	3m	12 lengths per pack
CVS22/3	22mm	3m	12 lengths per pack
CVS28/3	28mm	3m	12 lengths per pack

Double Cover



CVD10/2.5	10mm	2.5m	12 lengths per pack
CVD15/2.5	15mm	2.5m	12 lengths per pack
CVD22/2.5	22mm	2.5m	12 lengths per pack
CVD10/3	10mm	3m	12 lengths per pack
CVD15/3	15mm	3m	12 lengths per pack
CVD22/3	22mm	3m	12 lengths per pack

• Cover snaps directly onto Hinged Clip



Suggested Specification

All 10mm, 15mm, 22mm & 28mm pipework should be fitted with Hinged Pipe Clips (see pages 3 & 4) from the Talon 'TS' (single) or 'TD' (double) Interlocking range. Where exposed pipework needs to be covered Talon uPVC Pipe Cover should be used fitting directly onto the Talon Interlocking clips.