




## KICKSPACE®

Clever by design, MYSON's innovative, plinth heaters provide a space saving heating solution for kitchens where vital wall space is often taken up by a traditional radiator. The discrete KICKSPACE® can be fitted easily under units allowing more interior design freedom and rapid space heating using a high surface area heat exchanger.

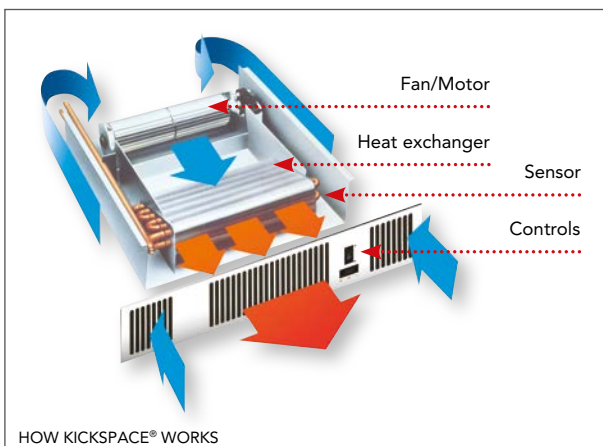

### HYDRONIC - KICKSPACE® 500, 600 AND 800

The most popular range of KICKSPACE® are the hydronic models that integrate directly into the existing central heating system. These three models provide heat outputs from 1kW to 2.6kW, providing warmth for any room. The fan on these models will activate with the central heating system.

### HYDRONIC - KICKSPACE® 80S AND 80D

NEW to the KICKSPACE® range, the KICKSPACE® 80S and 80D are a lower height and suitable for Ikea and European style kitchen units. They have all the features of the KICKSPACE® and come in a single and double width for extra output.

### LOW VOLTAGE HYDRONIC - KICKSPACE® 600-12V

This unique model means you get all the advantages of KICKSPACE® but it can be used in areas of high humidity, such as bathrooms and en-suites.



500E



600E White\*



600E Brushed  
Stainless Steel\*



### ELECTRIC - KICKSPACE® 500E AND 600E\*


The electric range is perfect for properties without a central heating system or in rooms where there is no existing pipework. Quick and easy to fit, the 500E can provide a heat output up to 2kW while the 600E is up to 3kW.

### DUO - KICKSPACE® 500 DUO

The Duo model combines the advantages of the hydronic and electric models, with the flexibility to switch between central heating and electric modes.

\*Please note that KICKSPACE® 600E fascia grilles are a part of the product and can not be changed.  
Kitchen sets kindly supplied by Second Nature Kitchens - [www.sncollection.co.uk](http://www.sncollection.co.uk).

## KICKSPACE® CONTROLS & ACCESSORIES

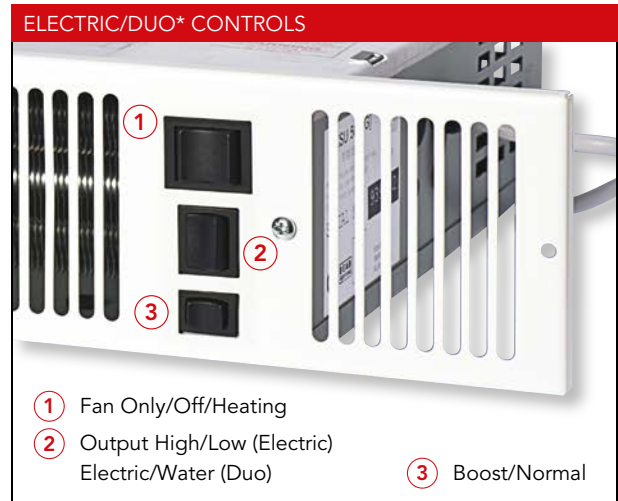

\*DUO = Electric/Hot Water

### KICKSPACE® Grilles

KICKSPACE® grilles are available in four finishes, white, black, chrome and brushed stainless steel. All KICKSPACE® models\* are supplied with white grilles however alternative finishes can be purchased separately.

\*The KICKSPACE® 600E grille is an integral part of the product and therefore cannot be removed, it is available in white or brushed stainless steel.

### KICKSPACE® Remote Thermostat

The KICKSPACE® room thermostat senses the room temperature and, if required, will activate the unit to provide additional heat. It is suitable for use with hydronic models only (500, 600, 600-12V, 800, 80S & 80D).

**SUPPLIED WITH:** 3 metres of cable.

### KICKSPACE® Remote Wall Switch

The KICKSPACE® remote wall switch is available in white or brushed stainless steel. The remote wall switch is suitable for use with hydronic models only (500, 600, 600-12V, 800, 80S & 80D).

**SUPPLIED WITH:** 3 metres of cable.



## KICKSPACE®

## GENERAL SPECIFICATION &amp; TECHNICAL INFORMATION

**CERTIFICATION**  
Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU. Outputs are tested to BS 4856 Part 1. Sound levels are tested to EN 23741.

**2 GUARANTEE**  
2 year guarantee from date of purchase against manufacturing defects.

**COLOUR**  
Supplied grilles finished in white (RAL 9016). Black (RAL 9011), chrome and brushed stainless steel can be purchased separately.

**A ACCESSORIES**  
Wall switches, thermostat and fascia grilles available for hydronic 500, 600, 800, 80S & 80D only. Please see page 126 & 129.

**SYSTEM**  
Closed circulation, 2 pipe pump assisted central heating systems.

**CONNECTIONS**  
Hydronic/Duo: 15mm copper pipes.  
Compression: Compression fitting flexible hoses supplied.

**AIR VENTS**  
Integrated (hydronic/duo only).

**OPERATING PRESSURES**  
Tested to a pressure of 20 bar.  
Working pressure of up to 10 bar.

**OPERATING TEMPERATURE**  
Maximum 90°C.

**ELECTRICAL SUPPLY**  
220-240V-50Hz.  
KICKSPACE® 500, 600, 600-12V, 800, 80S & 80D require a supply fused at 3A.  
KICKSPACE® 500 DUO requires a supply fused at 5A.  
KICKSPACE® 500E requires a supply fused at 10A.  
KICKSPACE® 600E requires a supply fused at 13A.

**DELIVERY**  
2 - 5 working days.

For more general information, please see page 242.

HYDRONIC MODELS										
		Fan Speed	Model							
			500	600	800	600-12V	500 DUO	80S	80D	
Dimensions	Nominal Height (mm)	-	101	101	101	101	101	80	80	
	Depth (mm)	-	309	309	309	309	318	301	301	
	Length (mm)	-	496	550	603	550	496	560	760	
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	25.7	26.4	28.5	29.4	25.7	24.5	21.8	
		Boost	38.1	37.2	49.8	39.0	38.1	31.4	35.6	
Weight, Water Content & Motor Power	Unit Weight (kg)	-	4.3	5.0	5.5	7.9†	4.5	3.83	5.13	
	Water Content (l)	-	0.26	0.30	0.34	0.30	0.26	0.17	0.25	
	Motor Power (W - max.)	-	25	40	40	40	25	13	17	
Air Flow Rates	Air Flow (m³/h)	Normal	70	106	139	106	70	68	87	
		Boost	90	138	210	138	90	71	90	
	Air Flow (ft³/h)	Normal	2471	3742	4908	3742	2471	2313	3192	
		Boost	3177	4872	7415	4872	3117	2511	3069	
Approximate Hydraulic Resistance	mm wg		455	788	1046	911	1046	652	592	613
		<b>340</b>	488	625	544	625	380	372	439	
		227	231	326	258	326	204	207	295	
		113	82	95	82	95	68	95	176	
			455	7.7	10.3	8.9	10.3	6.4	5.8	6.0
	kPa	<b>340</b>	4.8	6.1	5.3	6.1	3.7	3.6	4.3	
		227	2.3	3.2	2.5	3.2	2.0	2.0	2.9	
		113	0.8	0.9	0.8	0.9	0.7	0.9	1.7	

\*Sound levels tested in accordance with EN 23741.

†Includes transformer.

## KICKSPACE®

### TECHNICAL INFORMATION (cont...)

ELECTRIC MODELS				
		Fan Speed	Model	
			500E	600E
Dimensions	Nominal Height (mm)	-	101	100
	Nominal Depth (mm)	-	203	225
	Nominal Length (mm)	-	496	600
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Low	27.2	38.0
		High	40.2	-
Weight	Unit Weight (kg)	-	3.0	3.5
Air Flow Rates	Air Flow (m³/h)	Low	70	210
		High	90	-
	Air Flow (ft³/h)	Low	2471	7560
		High	3177	-

\*Sound levels tested in accordance with EN 23741.

### DIMENSIONS

#### KICKSPACE® 500

#### KICKSPACE® 600/600-12V

#### KICKSPACE® 800

#### KICKSPACE® 500 DUO

#### KICKSPACE® 500E

#### KICKSPACE® 600E

#### KICKSPACE® 80S

#### KICKSPACE® 80D

**N.B:** KICKSPACE® 500E: Add 4.5mm to the chassis height of the above models (except 600E) to allow for rubber mountings and screws.

# KICKSPACE® HEAT OUTPUTS

## HYDRONIC MODELS

Model	Fan Speed	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Grille Supplied	Order Code
		Watts	Btu/h	Watts	Btu/h		
KICKSPACE® 500	Normal	896	3057	566	1930	White	3KICK500
	Boost	1166	3980	683	2331		
KICKSPACE® 600	Normal	1278	4361	729	2486	White	3KICK600
	Boost	1625	5545	939	3203		
KICKSPACE® 800	Normal	1707	5824	1077	3675	White	3KICK800
	Boost	2192	7478	1289	4397		
KICKSPACE® 80S	Normal	755	2576	455	1552	White	3KICK80S
	Boost	876	2989	509	1737		
KICKSPACE® 80D	Normal	1023	3490	624	2129	White	3KICK80D
	Boost	1169	3989	707	2412		

## LOW VOLTAGE HYDRONIC MODEL

Model	Fan Speed	1278	4361	729	2486	White	3KICK60012V
		KICKSPACE® 600-12V	Boost	1625	5545		

## HYDRONIC-ELECTRIC MODEL

Model	Fan Speed	835	2849	447	1527	White	3KICK500DUO
		KICKSPACE® 500 DUO*	Boost	1083	3696		

Heat outputs tested in accordance with BS 4856 Part 1.

\*The unit will operate on either fan speed to provide 1kW of heating in electric mode.

**Flow Rate:** 340 ltr/h (75 gal/h)

### Flow Rate Correction Factors:

455 ltr/h (100 gal/h) multiply output by 1.03

227 ltr/h (50 gal/h) multiply output by 0.96

113 ltr/h (25 gal/h) multiply output by 0.85

## ELECTRIC MODELS

Model	Fan Speed	Heat Outputs		Grille Supplied	Order Code
		Watts	Btu/h		
KICKSPACE® 500E	Normal	1000	3400	White	3KICK500E
	Boost	2000	6800		
KICKSPACE® 600E**	Normal	1000	3400	White	3EKICKW
	Medium	2000	6800		
	Boost	3000	10200		
	Normal	1000	3400	Brushed Stainless Steel	3EKICKBS
	Medium	2000	6800		
	Boost	3000	10200		

\*\*600E Fascia grilles are an integral part of the product and cannot be removed.

Please ensure you choose the required finish at time of ordering using the correct code.

## KICKSPACE® GRILLES

Colour	Order Code - KICKSPACE® Model					
	500	600 / 600-12V	800	500E / 500 DUO	80S	80D
White	WG500	WG600	3WG800	EWG500	WG80S	WG80D
Black	BLG500	BLG600	3BLG800	EBLG500	BLG80S	BLG80D
Chrome	CG500	CG600	3CG800	ECG500	CG80S	CG80D
Brushed Stainless Steel	BSG500	BSG600	3BSG800	EBSG500	BSG80S	BSG80D

## KICKSPACE® ACCESSORIES

Product	Colour	Order Code
Remote Wall Switch	White	RCONTWH
	Brushed Stainless Steel	RCONTBS
Remote Thermostat	White	RCONTSTAT
Flexible Hoses (Pair)	-	FP

