




where inspiration flows  
taps | showering | accessories

technical sheet  
product code: CEL-149-1/2-C/P



technical drawing:

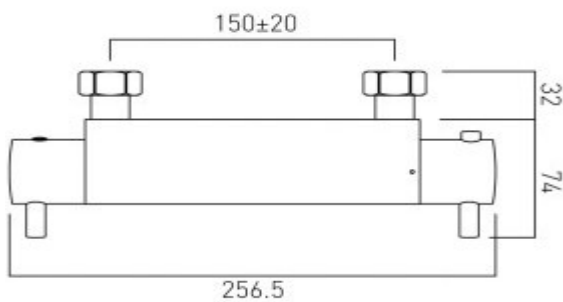

description: exposed thermostatic shower valve, 1/2" wall mounted  
thermostatic cartridge V-001C-PLA  
flow cartridge CEL-002B-1/2  
3/4" x 1/2" x 50mm male eccentrics


finishes: chrome

 recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP

flow rate at 3.0 bar flow pressure: 21 l/min

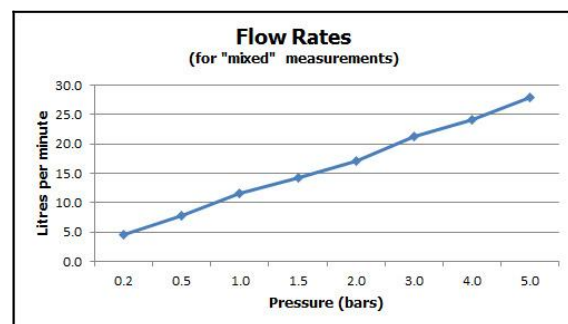

'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard

certificates and awards:



cert no. 1609049