

PRODUCT GUIDE 2018



WATER CONTROLS FOR A MODERN WORLD

RELIANCE

TEMPERATURE
CONTROL

FLOW
CONTROL

HEATING SYSTEM
COMPONENTS

WASHROOM
SYSTEMS

HEATING & COOLING
DISTRIBUTION SYSTEMS

PLUMBING
SYSTEMS

THE WORLD LEADER IN WATER CONTROL.

Water is a fundamental resource and necessary in every type of modern building. The demands we place on this resource are great and often complex, requiring immediate performance at the right temperature and pressure with no risk of harm. At Reliance UK, we understand why, where and how water needs to move around a building; using our knowledge to ensure it can be provided safely and securely, without a second thought required from any user.

As part of a global business, we have a wealth of expertise to draw upon in the development of water management systems. Our innovative quality solutions are designed and built to last, performing safely and efficiently in buildings where people live, work and play, from leisure facilities to hospitals and state-of-the-art offices.

Our insight and understanding of water management systems means that even the most complex system won't hinder an architect's vision, and the design and quality of our solutions will always satisfy a specifier's demand for form and function.

Reliance UK are masters in the management of water within the modern built environment.

PRODUCT RATING.

By means of helping our customers select the most suited product for their project, we have split our range into three distinct categories; Premium, Advanced and Essentials. With varying product capabilities and benefits, our range will help you tailor the product to the project itself, not the other way round.



PREMIUM

Products designed by Reliance to meet the most exacting of performance and legislative requirements with enhanced designs to deliver premium features and benefits.



ADVANCED

Our intermediate range of plumbing and heating products with additional features to enhance performance or installation.



ESSENTIALS

A range of everyday plumbing and heating products which deliver great performance from water supply to outlet.

CONTENTS.

- 3 TEMPERATURE CONTROL**
Precision water temperature controls for optimum comfort and safety
- 11 FLOW CONTROL**
Precision controls to regulate water flow and pressure for safe operating conditions
- 23 HEATING SYSTEM COMPONENTS**
Versatile solutions specifically designed for precise control and safety of sealed heating systems
- 37 WASHROOM SYSTEMS**
Standards compliant, complete system solutions for healthcare, education and commercial washroom applications
- 53 HEATING & COOLING DISTRIBUTION SYSTEMS**
Innovative solutions for control and delivery of heating and hot water in multi-occupancy buildings
- 59 PLUMBING SYSTEMS**
Slimline, metal, push-fit plumbing system suitable for all domestic and commercial applications
- 73 ACCREDITED AND ASSURED**
- 74 BETTER CONNECTED**

TEMPERATURE CONTROL

Reliable water temperature controls for optimum safety and comfort

- 5 Thermostatic Mixing Valves
- 9 Small Group Mixing Valves
- 9 Large Group Mixing Valves
- 10 Thermal Balancing Valves



FEATURED PRODUCT:

Heatguard® Dual



A TMV2 & TMV3 approved Thermostatic Mixing Valve compliant with both NHS model engineering specification code D08 and BSEN 1111. The Heatguard® Dual enables accurate temperature control to protect the end user from extreme water temperatures. The valve comes complete with either 2 in 1 fittings which include check valves and strainers, or 4 in 1 fittings which incorporate the check valves and strainers plus isolators and test ports.

Spotlight Features:



CAP

Unique purpose-built adjuster tool prevents unauthorised tampering



UNION CONNECTORS

Union connections give total installation flexibility

Other Features & Benefits:

- Fully approved by Buildcert and the TMV3 scheme for basin, bidet, shower and high pressure bathfill applications
- Rapid failsafe on either hot or cold supply failure
- Provides stable mixed water temperature
- Building Regulations Part G and D08 compliant
- Available with 15mm, 22mm and Universal connections, with or without isolating valves
- Scale resistant internal components ensure a long, trouble-free working life



Thermostatic Mixing Valves

Heatguard® TMV3-8

- Fully approved basin, bidet, shower and high pressure bathfill applications
- Union connections give total installation flexibility
- Rapid failsafe on either hot or cold supply failure
- Unique purpose built adjuster tool prevents unauthorised tampering

Product	Lpm	Size	Code
Heatguard® TMV3-8 - 2 in 1	37 at 2.5 bar	15mm	HEAT160015
Heatguard® TMV3-8 - 2 in 1	37 at 2.5 bar	22mm	HEAT160020
Heatguard® TMV3-8 - 2 in 1 Universal	37 at 2.5 bar	15/22mm	HEAT160005
Heatguard® TMV3-8 - 4 in 1	37 at 2.5 bar	15mm	HEAT160030
Heatguard® TMV3-8 - 4 in 1	37 at 2.5 bar	22mm	HEAT160035
Heatguard® TMV3-8 Base Valve	37 at 2.5 bar	1"	HEAT160001
Potable water brass adaptor			ZADP110780

SPECIFIERS TEXT:

2 in 1: 15mm or 22mm TMV3 approved thermostatic mixing valve, complete with single check valves and strainers (the strainers must be fitted upstream of the check valves). Must incorporate a temperature adjustment mechanism using a non-standard tool to alter the mixed water temperature. (Include correct product range code).

4 in 1: 15mm or 22mm TMV3 approved thermostatic mixing valve, complete with integral isolating ball valves, strainers, check valves and gauge/flushing point. Must incorporate a temperature adjustment mechanism using a non-standard tool to alter the mixed water temperature. (Include correct product range code).



Heatguard® TMV3-8 Spares

Product	Code
Heatguard® TMV3-8 2 in 1 adaptor service kit	SKIT219053
Heatguard® TMV3-8 4 in 1 adaptor service kit	SKIT300020
Heatguard® TMV3-8 full internal service kit	SKIT170015
Heatguard® TMV3-8 replacement cap	ZCAP160001
Heatguard® TMV3-8 temperature adjusting key	ZKEY110001



Heatguard® Dual

- Rapid failsafe on either hot or cold supply failure
- Provides stable mixed water temperature
- Tamperproof cap
- Flat faced union connections for ease of maintenance
- Part G and D08 compliant
- Available in 15mm, 22mm and universal connections, with or without isolating valves
- Scale resistant internal components ensure a long, trouble-free working life

Product	Lpm	Size	Code
Heatguard® Dual - 2 in 1	35 at 2.5 bar	15mm	HEAT110614
Heatguard® Dual - 2 in 1	35 at 2.5 bar	22mm	HEAT110624
Heatguard® Dual - 2 in 1 Universal	35 at 2.5 bar	15/22mm	HEAT110615
Heatguard® Dual - 4 in 1	35 at 2.5 bar	15mm	HEAT110616
Heatguard® Dual - 4 in 1	35 at 2.5 bar	22mm	HEAT110625
Heatguard® Dual - 4 in 1 Universal	35 at 2.5 bar	15/22mm	HEAT110617
Potable water brass adaptor			ZADP110780



Heatguard® Dual Spares

Product	Size	Code
Heatguard® Dual full internal service kit	15/22mm	SKIT110600
Heatguard® Dual seal service kit	15/22mm	SKIT110605
Heatguard® Dual 2 in 1 service kit	15/22mm	SKIT110610
Heatguard® Dual 4 in 1 service kit	15/22mm	SKIT110615
Heatguard® Dual replacement cap	15/22mm	ZCAP110600



Thermostatic Mixing Valves

Heatguard® Style

A compact thermostatic mixing valve with highly polished chrome finish. Fits easily within front of wall supply to outlets, and complies with D08 to provide supreme anti-scalding protection. Easy to access and maintain with a smart, streamlined appearance to compliment high quality finish of the washroom or bathroom. Ideal for high specification bathrooms and washrooms.

★
Coming 2018



High quality chrome polished finish

Ideal for high specification washrooms where the TMV will be front of wall.



Includes check valves and strainers

Fully serviceable, ensuring a long working life



Other features:

- D08 compliant
- Rapid failsafe on either hot or cold supply failure
- Provides stable mixed water temperature
- Minimum flow rate 2 lpm

Product	Size	Code
Heatguard® Style TMV3	15mm	HEAT135001
Heatguard® Style TMV3	15mm Push-fit	SBHEAT135001

SPECIFIERS TEXT: WRAS approved and D08 compliant thermostatic mixing valve with polished chrome finish, capable of working at 2 lpm and with inlet connections side by side. (Include correct product code)



Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

Thermostatic Mixing Valves

Ausimix® Compact

- Rapid fail-safe on either hot or cold supply failure
- Provides stable mixed water temperature
- Unique temperature adjustment tool incorporated into the cap
- Part G and D08 compliant
- Flat faced union connections for ease of maintenance

Product	Lpm	Size	Code
Ausimix® Compact - 2 in 1	35 at 2.5 bar	15mm	HEAT110750
Ausimix® Compact - 2 in 1	35 at 2.5 bar	22mm	HEAT110755
Ausimix® Compact - 2 in 1	36 at 2.5 bar	15mm pushfit	SBHEAT110750
Ausimix® Compact - 2 in 1	36 at 2.5 bar	22mm pushfit	SBHEAT110755
Ausimix® Compact - 4 in 1	35 at 2.5 bar	15mm	HEAT110780
Ausimix® Compact - 4 in 1	35 at 2.5 bar	22mm	HEAT110785
Ausimix® Compact - 4 in 1	36 at 2.5 bar	15mm pushfit	SBHEAT110780
Ausimix® Compact - 4 in 1	36 at 2.5 bar	22mm pushfit	SBHEAT110785
Ausimix® full internal service kit			SKIT110700
Ausimix® seal service kit			SKIT110605
Ausimix® 2 in 1 service kit		15mm	SKIT110610
Ausimix® 2 in 1 service kit		22mm	SKIT110710
Ausimix® 4 in 1 service kit		15mm	SKIT110715
Ausimix® 4 in 1 service kit		22mm	SKIT110720
Ausimix® replacement cap			ZCAP110700
Ausimix® 3/4" fibre washer		3/4"	ZWAS110705
Ausimix® 1" fibre washer		1"	ZWAS110700
Potable water brass adaptor		1/4" MBSP x 15mm	ZADP110780



Ausimix® Compact Telescopic

- Designed with retro-fit applications in mind, the telescopic union connectors provide greater flexibility and adjustment
- Telescopic connectors are adjustable by 10mm on either inlet
- Rapid failsafe on either hot or cold supply failure
- Provides stable mixed water temperature
- Unique temperature adjustment tool incorporated into the cap
- Part G and D08 compliant
- Flat faced union connections for ease of maintenance
- Inlets house check valve and strainer
- Bodies are nickel plated DZR brass

Product	Lpm	Size	Code
Ausimix® Compact Telescopic - 2 in 1	35 at 2.5 bar	15mm	HEAT110751



Promix® 22-2

- Single piece cartridge allows easy maintenance and replacement
- Ensures rapid and positive shut-off mixed flow on cold or hot supply failure
- High flow design suitable for rapid bath fill at low pressure
- Designed to handle dynamic pressure imbalances of up to 10:1
- Optional wall mounting bracket
- TMV3 approved for bath fill applications

Product	Lpm	Size	Code
Promix® 22-2 - 4 in 1	68 at 2.5 bar	22mm	PROM022007
Single piece cartridge			SKIT320032
Seals service kit			SKIT330009
4 in 1 adaptor service kit			SKIT300011
Spare bracket for Promix® 22-2			BRKT300010



SPECIFIERS TEXT: A 22mm TMV3, chrome plated, single piece thermostatic cartridge, mixing valve for point of use applications, supplied complete with integral isolating valves, full flow line strainers, test/flushing points and check valves (select appropriate range code).

Thermostatic Mixing Valves

Heatguard® BF2-2 Sports

- Specifically designed to give high flow rates on low pressure systems
- Ideal for fitting to baths in low pressure systems to comply with Part G regulations
- Technically advanced construction means longer life and reduced maintenance intervals

Product	Lpm	Size	Code
Heatguard® BF2-2 - 2 in 1	85 at 2.5 bar	22mm	HEAT115100
Heatguard® BF2-2 - 4 in 1	85 at 2.5 bar	22mm	HEAT115105
Heatguard® BF2-2 full internal service kit			SKIT115001
2 in 1 adaptor service kit			SKIT219053
4 in 1 adaptor service kit			SKIT300020
Potable water brass adaptor			ZADP110780

SPECIFIERS TEXT: A range of high flow thermostatic blending valves for use in applications where hot water temperature control for large group applications is required, and multiple outlet installations requiring exceptionally high flow rates. (Select appropriate range code).



Euromixer®

- Adjustable or lockable temperature control gives complete flexibility to the installer
- High flow rates suitable for feeding 1 - 10 showers or taps
- 1" x 1" or 1" x 1¼" Female BSP connections to suit all types of pipework
- 4 in 1 services fittings provided isolation, filtration, cross-flow prevention and a gauge port for testing in a single compact unit

Product	Lpm	Size	Code
Euromixer® 630 group mixing valve - 4 in 1	120 at 2.5 bar	1" FBSP	HEAT630100
Euromixer® 640 group mixing valve - 4 in 1	150 at 2.5 bar	1¼" FBSP	HEAT640100
Full internal service kit for Euromixer® 630/640			SKIT630001



DID YOU KNOW?

Reliance is one of the world's largest manufacturers of thermostatic mixing valves for sanitary use, manufacturing in excess of 1 million valves every year.

Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

Small & Large Group Mixing Valves

Heatguard® Planar

- Extremely stable mixed water temperature even under extreme or unusual supply conditions
- Quick reaction wax thermostats provide fine temperature control even with varying outlet flow rates
- Optional user-adjustable or lockable (and tamperproof) temperature controls gives complete flexibility to the end user
- High flow rates for valves in this class

Product	Size	Code
Heatguard® Planar 230 - 4 in 1	15mm	HEAT230100
Heatguard® Planar 330 - 4 in 1	22mm	HEAT330100
Heatguard® Planar 430 - 4 in 1	28mm	HEAT430100
Heatguard® Planar 530 - 4 in 1	28mm inlet x 35mm outlet	HEAT530100
Full internal service kit for Planar 230		SKIT230100
Full internal service kit for Planar 330		SKIT330100
Full internal service kit for 430/530		SKIT430001
Heatguard® Planar 230/330 4 in 1 adaptor service kit		SKIT300020
Heatguard® Planar 430/530 4 in 1 adaptor service kit		SKIT300016



SPECIFIERS TEXT: A range of high flow thermostatic blending valves for use in applications where hot water temperature control for large group applications is required, and multiple outlet installations requiring exceptionally high flow rates. (Select appropriate range code).



Masterguard

- Integrated fixing point allows easy wall or floor fixing
- Designed for very high flow rates, with extremely stable outlet temperature
- Adjustable set temperature mechanism with locking feature, allows installer flexibility
- Minimal moving parts and simple construction reduce maintenance service interval
- 4 in 1 installation fitting provides easy orientation of valve to match inlet pipes, and includes cross-flow prevention, isolation and filtration

Product	Lpm	Size	Code
Masterguard 830 - 4 in 1	120 at 2.5 bar	1" FBSP	MIX83004
Masterguard 840 - 4 in 1	170 at 2.5 bar	1¼" FBSP	MIX84004
Masterguard 850 - 4 in 1	260 at 2.5 bar	1½" FBSP	MIX85004
Masterguard 860 - 4 in 1	360 at 2.5 bar	2" FBSP	MIX86004



SPECIFIERS TEXT: A range of high flow thermostatic blending valves for use in applications where hot water temperature control for large group applications is required, and multiple outlet installations requiring exceptionally high flow rates. (Select appropriate range code).



Heatguard® Tempering Valve

- Pre-set and locked at 55°C
- 22mm direct compression connections
- Tamperproof cap
- Provides stable mixed water temperature
- Easy and quick to install
- Complete with 22mm direct compression connections

Product	Size	Code
Heatguard® Tempering Valve	22mm	HEAT110505



Thermal Balancing Valves

Thermal Balancing Valves

- Easy temperature adjustment between 40 - 65°C with tamperproof cap
- Built-in disinfection function to protect against Legionella
- Supplied pre-insulated reducing installation time and cost
- Dry-fit thermometer - no need to drain the system down

Product	Size	Code
Thermal balancing valve	1/2" FBSP	TREG100060
Thermal balancing valve	3/4" FBSP	TREG100065
Thermal Balancing Valve	15mm	SBTREG100060
Thermal Balancing Valve	22mm	SBTREG100065
Spare Temperature Gauge		GAGE100060
Spare insulation case	1/2"	INSU100060
Spare insulation case	3/4"	INSU100065

SPECIFIERS TEXT: A (insert applicable size, 1/2" or 3/4") thermostatic regulating valve including a disinfection function, dry fit thermometer, pre-fitted insulation case, and identity tag. The valve must be WRAS approved to UK water regulations, adjustable between 40°C and 65°C, have Viton o-ring seals and no internal rubber seat. Ref TREG100 series from Reliance UK



Thermometers and Probes

Product	Code
Thermometers and Probes Temperature readout with probe	READ500005
Thermometers and Probes Temperature probe plug socket	PLUG500001



DID YOU KNOW?

Our products have been specified in **First Street**, the new work and leisure complex in Manchester city centre.

Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

FLOW CONTROL

Precision controls to regulate water flow and pressure for safe operating conditions.

- 13 Pressure Reducing Valves
- 16 Ball Valves
- 17 Strainers & Isolators
- 19 Water Meters
- 21 Backflow Prevention



FEATURED PRODUCT:

312 Compact Series PRV

A range of domestic pressure reducing valves, compact in design and adjustable between 1.5 - 6.0 bar. All working components are contained in cartridge form with two downstream test points.

Spotlight Features:



ONE-PIECE CARTRIDGE

One-piece, easy to replace cartridge contains all working parts



GAUGE PORTS

Located on either side of the base of valve



Other Features & Benefits:

- Drop tight valve: controls the pressure under both flow and no-flow conditions
- Fully serviceable integral strainer to protect the seat of the valve
- Installation flexibility: can be installed in any orientation and is available in both hot and cold versions



Pressure Reducing Valves

312 Compact Series

- Drop tight valve - controls the pressure under flow and no-flow conditions
- One piece, easy to replace cartridge contains all working parts
- Integral strainer to protect the seat of the valve and is fully serviceable
- Installation flexibility - can be installed in any orientation
- Gauge ports located on either side of the base of the valve

For up to 16 bar and 45°C. Adjustable between 1.5 - 6.0 bar.

Product	Size	Code
312 Compact Series	1/2" FBSP	PRED312020
312 Compact Series	3/4" FBSP	PRED312025
312 Compact Series	1/2" MBSP union	PRED312001
312 Compact Series	3/4" MBSP union	PRED312005
312 Compact Series	15mm comp	PRED312010
312 Compact Series	22mm comp	PRED312015
312 Compact Series with gauge	15mm comp	PRED312061
312 Compact Series with gauge	22mm comp	PRED312066



For up to 16 bar and 80°C. Adjustable between 1.5 - 6.0 bar.

Product	Size	Code
312 Compact Series	1/2" FBSP	PRED312070
313 Compact Series with gauge	1/2" FBSP	PRED312071
312 Compact Series	3/4" FBSP	PRED312075
313 Compact Series with gauge	3/4" FBSP	PRED312076
312 Compact Series	1/2" MBSP union	PRED312050
312 Compact Series	3/4" MBSP union	PRED312055
312 Compact Series	15mm comp	PRED312060
312 Compact Series	22mm comp	PRED312065



SPECIFIERS TEXT: Product code: PRED 312compact (select appropriate) WRAS approved pressure reducing valve, and all working components contained in a cartridge form with two downstream test points, one either side, suitable for domestic applications.



314 Series Dial-up

- One piece, easy to replace cartridge contains all the working components
- Suitable for hot and cold water applications for installation flexibility
- Easy to read pressure indicator dial
- Integral strainer to protect the cartridge and the installation
- MBSP connection complete with union fitting for ease of servicing
- Can be installed in any orientation
- Also available with SharkBite® push-fit connectors for even quicker installation

For up to 25 bar and 70°C. Adjustable between 1.0 - 6.0 bar.

Product	Size	Code
Adjustable PRV 314F dial-up	1/2" FBSP	PRED314001
Adjustable PRV 314F dial-up	3/4" FBSP	PRED314005
Adjustable PRV 314P dial-up	15mm pushfit	SBPRED314001
Adjustable PRV 314P dial-up	22mm pushfit	SBPRED314005
Adjustable PRV 314M dial-up	1/2" MBSP	PRED314010
Adjustable PRV 314M dial-up	3/4" MBSP	PRED314015



Pressure Reducing Valves

Easetet® 320 Series

- High flow rate design
- 'Lift and turn' mechanism for ease of pressure adjustment
- One piece Easetet cartridge
- Fully serviceable strainer
- Can be installed in any orientation
- MBSP connection complete with union fitting for ease of servicing
- Drop tight valve, controls the pressure under both flow and no-flow conditions
- Single gauge port on the base of the valve
- Available with SharkBite® Metal Push-fit connections for even quicker installation

For up to 16 bar and 45°C. Adjustable between 1.5 - 6.0 bar.

Product	Size	Code
Adjustable PRV 320F	½" FBSP	PRED320001
Adjustable PRV 320F	¾" FBSP	PRED320005
Adjustable PRV 320P	15mm pushfit	SBPRED320001
Adjustable PRV 320P	22mm pushfit	SBPRED320005
Adjustable PRV 320M	½" MBSP	PRED320003
Adjustable PRV 320M	¾" MBSP	PRED320011
Adjustable PRV 320C	15mm comp	PRED320010
Adjustable PRV 320C	22mm comp	PRED320015

For up to 16 bar and 80°C. Adjustable between 1.5 and 6.0 bar.

Product	Size	Code
Adjustable PRV 320F	½" FBSP	PRED320050
Adjustable PRV 320F	¾" FBSP	PRED320055
Adjustable PRV 320P	15mm pushfit	SBPRED320050
Adjustable PRV 320P	22mm pushfit	SBPRED320055
Adjustable PRV 320M	½" MBSP	PRED320051
Adjustable PRV 320M	¾" MBSP	PRED320056
Adjustable PRV 320C	15mm comp	PRED320060
Adjustable PRV 320C	22mm comp	PRED320065

SPECIFIERS TEXT:

Pressure reducing valve with lift and turn adjustment mechanism, full flow strainer and all working components contained in a cartridge form with downstream test point (select appropriate range code).



Predator PRV

- For use at temperatures up to 80°C
- Adjustable between 1.0 - 6.0 bar
- Drop-tight valve - controls the pressure under both flow and no-flow conditions
- Integral strainer protects the seat of the valve and is fully serviceable
- Can be installed in any orientation providing the ultimate installation flexibility
- Suitable for hot or cold applications

For use at temperatures up to 80°C. Adjustable between 1.0 - 6.0 bar.

Product	Size	Code
Adjustable Predator PRV with gauge	15mm comp	PRED800015
Adjustable Predator PRV with gauge	22mm comp	PRED800020



£

£

Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Pressure Reducing Valves

Commercial 315i Series

- Easy to read pressure indicator
- Robust design
- Fully serviceable strainer
- Suitable for hot and cold supplies
- Union fitting for ease of servicing
- Can be installed in any orientation
- Also available with SharkBite® push-fit connectors for even quicker installation

For up to 25 bar and 70°C. Adjustable between 1.0 - 6.0 bar.

Product	Size	Code
Adjustable PRV 315i dial-up	½" MBSP union	PRED315010
Adjustable PRV 315i dial-up	¾" MBSP union	PRED315020
Adjustable PRV 315i dial-up	1" MBSP union	PRED315030
Adjustable PRV 315i dial-up	1¼" MBSP union	PRED315040
Adjustable PRV 315i dial-up	1½" MBSP union	PRED315050
Adjustable PRV 315i dial-up	2" MBSP union	PRED315060
Adjustable PRV 315i dial-up	15mm capillary	PRED315070
Adjustable PRV 315i dial-up	22mm capillary	PRED315080
Adjustable PRV 315i dial-up	28mm capillary	PRED315090
Adjustable PRV 315i dial-up	28mm comp	PRED315110

SPECIFIERS TEXT: WRc listed, union type pressure reducing valve with full flow strainer and all working components contained in a cartridge form, with two downstream test points, one either side and with integral set pressure indication - dial up system (select appropriate range code).



Commercial / Industrial 6247 Series

- Manufactured in corrosion resistant bronze to CC491K
- Accurate pressure control
- Robust design
- One piece cartridge
- Upstream and downstream test points
- Mini ball isolating test point
- Can be installed in any orientation

For up to 16 bar and 60°C. Adjustable between 1.5 - 6.0 bar.

Product	Size	Code
6247 Adjustable PRV	DN 65	PRED624001
6247 Adjustable PRV	DN 80	PRED624002
6247 Adjustable PRV	DN 100	PRED624003
Mini Test Point Ball Valve	¼" MBSP	BVAL624001

SPECIFIERS TEXT: A in-line cartridge pressure reducing valve with full flow coaxial strainers, single piece cartridges with lockable dial-up facility on cartridges. Flanged to PN16. (Include correct product range code).



Replacement Pressure Reducing Valve Cartridges

- Spares for Reliance pressure reducing valves with one piece cartridges and threaded connection
- Care must be taken in selecting the correct cartridge

Product	Size	Code
One piece cartridge for 312 Compact	½" & ¾" 15 & 22mm	REDC312010
One piece Cartridge for 312 Compact	½" & ¾" 15 & 22mm	REDC312015
One piece cartridge for Easiset 320	½", ¾" & 1" 15 & 22mm	REDC320001
One piece cartridge for Easiset 320	½" & ¾"	REDC320002
One piece cartridge for 314 and 315i	½" & ¾"	REDC315010
One piece cartridge for 315i	1"	REDC315020
One piece cartridge for 315i	1¼", 1½" & 2"	REDC315030
One piece cartridge for 6247	DN65, 80, 100	REDC624001



Pressure Reducing Valves

Pressure Gauge

- Wide selection to suit all applications
- Both PSI and BAR registered

Product	Size	Code
40mm dial up to 10.0 bar	¼" MBSP back inlet	GAGE250017
50mm dial up to 4.0 bar	¼" MBSP back inlet	GAGE250007
50mm dial up to 6.0 bar	¼" MBSP back inlet	GAGE250001
50mm dial up to 10.0 bar	¼" MBSP centre back inlet	GAGE250004
50mm dial up to 16.0 bar	¼" MBSP back inlet	GAGE250006
50mm dial up to 6.0 bar	¼" MBSP top inlet	GAGE250016
63mm dial up to 6.0 bar	¼" MBSP back inlet	GAGE250002
63mm dial up to 10.0 bar	¼" MBSP back inlet	GAGE250005
63mm dial up to 6.0 bar	¼" MBSP bottom inlet	GAGE250008
63mm dial up to 10.0 bar	¼" MBSP bottom inlet	GAGE250009



£

Ball Valves

SharkBite® Quarter Turn Ball Valve Nickel Plated

Product	Size	Code
Quarter Turn Ball Valve Nickel Plated (Blue handle) (To be ordered in multiples of 5)	15mm	SB3515B
Quarter Turn Ball Valve Nickel Plated (Red handle) (To be ordered in multiples of 5)	15mm	SB3515R
Quarter Turn Ball Valve Nickel Plated (Blue handle) (To be ordered in multiples of 5)	22mm	SB3522B
Quarter Turn Ball Valve Nickel Plated (Red handle) (To be ordered in multiples of 5)	22mm	SB3522R



✓



SharkBite® Quarter Turn DZR Brass Ball Valve

Product	Size	Code
Quarter Turn DZR Brass Ball Valve (Chrome plated)	15mm	SB2715
Quarter Turn DZR Brass Ball Valve (Chrome plated)	22mm	SB2722
Quarter Turn DZR Brass Ball Valve (Chrome plated)	28mm	SB2728
Quarter Turn DZR Brass Ball Valve (Chrome plated)	35mm	SB2735E
Quarter Turn DZR Brass Ball Valve (Chrome plated)	42mm	SB2742E
Quarter Turn DZR Brass Ball Valve (Chrome plated)	54mm	SB2754E



✓



Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

Strainers & Isolators

Mini Isolating Brass Ball Valves

- Compact, high quality valve gives durability and secure isolation
- Available in nickel or brass finish
- Chrome plated brass ball, encapsulated between two high grade NBR seals, gives smooth operation and reliability
- Compression connections for ease of installation
- Not suitable for chilled water applications
- 16.0 bar maximum working pressure

Product	Size	Code
Isolating ball valve, brass, 10.0 bar	15mm	BVAL201001
Isolating ball valve, nickel plated, 10.0 bar	15mm	BVAL201002
Isolating ball valve, brass, 10.0 bar	22mm	BVAL201003
Isolating ball valve, nickel plated, 10.0 bar	22mm	BVAL201004
Isolating ball valve, nickel plated, 16.0 bar	15mm	BVAL201200



£

Nickel Plated Brass Ball Valves for Water

- Range of full bore ball valves
- PN25/PN40 FBSP variants available
- Easy to use lever handle with clear colouring to designate usage - red and blue for water in accordance with EN331
- Not suitable for chilled water applications

Product	Size	Code
Female ball valve PN40 - blue handle	¼"	BVAL400140
Female ball valve PN40 - blue handle	⅜"	BVAL400120
Female ball valve PN40 - blue handle	½"	BVAL400001
Female ball valve PN40 - blue handle	¾"	BVAL400010
Female ball valve PN40 - blue handle	1"	BVAL400020
Female ball valve PN40 - blue handle	1¼"	BVAL400030
Female ball valve PN40 - blue handle	1½"	BVAL400040
Female ball valve PN40 - blue handle	2"	BVAL400050
Female ball valve PN25 - blue handle	2½"	BVAL400130
Female ball valve PN40 - red handle	¼"	BVAL400141
Female ball valve PN40 - red handle	⅜"	BVAL400121
Female ball valve PN40 - red handle	½"	BVAL400000
Female ball valve PN40 - red handle	¾"	BVAL400011
Female ball valve PN40 - red handle	1"	BVAL400021
Female ball valve PN40 - red handle	1¼"	BVAL400031
Female ball valve PN40 - red handle	1½"	BVAL400041
Female ball valve PN40 - red handle	2"	BVAL400051
Female ball valve PN25 - red handle	2½"	BVAL400131
Compression ball valve PN25 - blue handle	15mm	BVAL400060
Compression ball valve PN25 - blue handle	22mm	BVAL400070
Compression ball valve PN25 - blue handle	28mm	BVAL400080
Compression ball valve PN25 - blue handle	35mm	BVAL400090
Compression ball valve PN25 - blue handle	42mm	BVAL400100
Compression ball valve PN25 - blue handle	54mm	BVAL400110
Compression ball valve PN25 - red handle	15mm	BVAL400061
Compression ball valve PN25 - red handle	22mm	BVAL400071
Compression ball valve PN25 - red handle	28mm	BVAL400081
Compression ball valve PN25 - red handle	35mm	BVAL400091
Compression ball valve PN25 - red handle	42mm	BVAL400101
Compression ball valve PN25 - red handle	54mm	BVAL400111



£

Strainers & Isolators

SharkBite® Appliance Valve

Product	Size	Code
Appliance valve	15mm	SB2415



SharkBite® Washing Machine Valve

Product	Size	Code
Washing Machine Valve	15mm x 3/4" MBSP	SB241520



SharkBite® Service Valve

Product	Size	Code
Service Valve (To be ordered in multiples of 5)	15mm	SB1915
Service Valve (To be ordered in multiples of 5)	22mm	SB1922



SharkBite® Stop Cocks

Product	Size	Code
Stop cock	15mm	SB1715
Stop cock	22mm	SB1722



Draincock with Street End

Product	Size	Code
Draincock with street end (To be ordered in multiples of 5)	15mm	SB1315
Chrome Plated Draincock (To be ordered in multiples of 5)	15mm	SB1315CP



Floreg® Isolating Strainer / Valve

- Serviceable without the need to remove the valve from the installation
- Saves water and energy as well as providing isolation for servicing
- Provides even distribution when supplying multiple outlets
- Precise flow control enables designers to size systems accurately
- 15mm compression connections for ease of installation
- Available with SharkBite® Metal Push-fit connections for even quicker installation
- Can be used for retrofit or new build installations
- Available with flow regulators from 4 lpm to 15 lpm
- The regulators are interchangeable so that alterations in flow rate, to suit customer requirements are quick and easy

Product	Size	Code
Floreg® Isolating Valve/Strainer 4 lpm	15mm	SERV970000
Floreg® Isolating Valve/Strainer 4 lpm	15mm pushfit	SBSERV970000
Floreg® Isolating Valve/Strainer 6 lpm	15mm	SERV970001
Floreg® Isolating Valve/Strainer 6 lpm	15mm pushfit	SBSERV970001
Floreg® Isolating Valve/Strainer 8 lpm	15mm	SERV970002
Floreg® Isolating Valve/Strainer 8 lpm	15mm pushfit	SBSERV970002
Floreg® Isolating Valve/Strainer 10 lpm	15mm	SERV970003
Floreg® Isolating Valve/Strainer 10 lpm	15mm pushfit	SBSERV970003
Floreg® Isolating Valve/Strainer 12 lpm	15mm	SERV970004
Floreg® Isolating Valve/Strainer 12 lpm	15mm pushfit	SBSERV970004
Floreg® Isolating Valve/Strainer 15 lpm	15mm	SERV970005
Floreg® Isolating Valve/Strainer 15 lpm	15mm pushfit	SBSERV970005



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Water Meters

Reliance 100 Single Jet Water Meter - Dry Dial, Cold (up to 30°C)

- Scale resistant integral components give long life and accuracy
- Fully rotational dry dial enables easy reading of meter regardless of installation position
- Compact design for either vertical or horizontal installation
- Silent operation
- Upgradable after installation for pulse output and radio transmission
- WRAS approval pending

Size & Connection	Nominal Flow	Class	Code
½" MBSP Union	1.5m³/h	A	WATM100001
¾" MBSP Union	2.5m³/h	A	WATM100004



Reliance 100 Single Jet Water Meter - Dry Dial, Hot (up to 90°C)

- Scale resistant integral components give long life and accuracy
- Fully rotational dry dial enables easy reading of meter regardless of installation position
- Compact design for either vertical or horizontal installation
- Silent operation
- Upgradable after installation for pulse output and radio transmission
- WRAS approval pending

Size & Connection	Nominal Flow	Class	Code
½" MBSP Union	1.5m³/h	A	WATM110001
¾" MBSP Union	2.5m³/h	A	WATM110004



Reliance 120 Single Jet Water Meter - Dry Dial, Cold (up to 30°C)

- Scale resistant integral components give long life and accuracy
- Fully rotational dry dial enables easy reading of meter regardless of installation position
- Compact design for either vertical or horizontal installation
- Silent operation
- Upgradable after installation for pulse output and radio transmission
- WRAS approval pending

Size & Connection	Nominal Flow	Class	Code
½" MBSP Union	1.5m³/h	A	WATM120001
¾" MBSP Union	2.5m³/h	A	WATM120004



Water Meters

Reliance 125 Single Jet water Meter - Pulse Output, Hot (up to 90°C)

- Scale resistant integral components give long life and accuracy
- Fully rotational dry dial enables easy reading of meter regardless of installation position
- Compact design for either vertical or horizontal installation
- Silent operation
- Upgradable after installation for pulse output and radio transmission
- WRAS approval pending

Size & Connection	Nominal Flow	Class	Code
½" MBSP Union	1.5m ³ /h	A	WATM125001
¾" MBSP Union	2.5m ³ /h	A	WATM125004



Reliance 210 Multi Jet water Meter - Dry Dial, Cold (up to 30°C)

- Highly accurate metering capability at very low flow rates
- Simple construction allows ability to cope with a wide range of water qualities
- Silent operation
- Supplied complete with nuts, tails and washers

Size & Connection	Nominal Flow	Class	Code
½" MBSP Union	1.5m ³ /h	B	WATM210001
¾" MBSP Union	2.5m ³ /h	B	WATM210004
1" MBSP Union	3.5m ³ /h	B	WATM210007
1¼" MBSP Union	6.0m ³ /h	B	WATM210008
1½" MBSP Union	10.0m ³ /h	B	WATM210009
2" MBSP Union	15.0m ³ /h	B	WATM210010



Reliance 210 Multi Jet water Meter - Pulse Output, Dry Dial, Cold (up to 30°C)

Size & Connection	Nominal Flow	Class	Code
½" MBSP Union	1.5m ³ /h	B	WATM210050
¾" MBSP Union	2.5m ³ /h	B	WATM210053
1" MBSP Union	3.5m ³ /h	B	WATM210056
1¼" MBSP Union	6.0m ³ /h	B	WATM210057
1½" MBSP Union	10.0m ³ /h	B	WATM210058
2" MBSP Union	15.0m ³ /h	B	WATM210059



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Backflow Prevention

Reduced Pressure Zone (RPZ) Backflow Preventers

- Incorporates a double check valve with a reduced pressure zone for protection against back pressure and back syphonage
- Protection against fluid category 4 : Type BA
- Verifiable backflow preventer with reduced pressure zone
- All serviceable components can be reached within easy access
- WRAS approval pending

Product	Type	Size	Code
RPZ Backflow Preventor - STBA (Compact Model)	BA	½"	RPZV250001
RPZ Backflow Preventor - STBA (Compact Model)	BA	¾"	RPZV250005
RPZ Backflow Preventor with isolators (Commercial Model)	BA	½"	RPZV255000
RPZ Backflow Preventor with isolators (Commercial Model)	BA	¾"	RPZV255005
RPZ Backflow Preventor with isolators (Commercial Model)	BA	1"	RPZV255010
RPZ Backflow Preventor with isolators (Commercial Model)	BA	1¼"	RPZV255015
RPZ Backflow Preventor with isolators (Commercial Model)	BA	1½"	RPZV255020
RPZ Backflow Preventor with isolators (Commercial Model)	BA	2"	RPZV255025



Spares

Product	Code	Product	Code
STBA RPZ Spare Cartridge	SRPZ250001	RPZ Tool - DN32-50	TOOL255015
RPZ Cartridge - DN15	SRPZ255000	RPZ Cap - DN15	ZCAP255000
RPZ Cartridge - DN20 & DN25	SRPZ255005	RPZ Cap - DN20 & DN25	ZCAP255005
RPZ Cartridge - DN32-50	SRPZ255015	RPZ Cap - DN32-50	ZCAP255015
RPZ Tool - DN15-25	TOOL255000	Test port ball valve	BVAL255000

Floguard® Single Check Valve

- Single check valves protect against the risk of backflow and back syphonage contaminations
- Compact, lightweight construction for easy installation
- Minimum pressure drop giving good flow rates
- Ideal for all class 2 contamination risks as per Water Supply (water fittings) Regulations 1999
- Available with a comprehensive selection of FBSP and compression connections

Product	Type	Size	Code
Floguard® single check valve, DZR brass	EB	15mm	FLOW235001
Floguard® single check valve, DZR brass	EB	22mm	FLOW235002
Floguard® single check valve, DZR brass	EB	28mm	FLOW235003
Floguard® single check valve, DZR brass	EB	½" FBSP	FLOW235004
Floguard® single check valve, DZR brass	EB	¾" FBSP	FLOW235005
Floguard® single check valve, DZR brass	EB	1" FBSP	FLOW235006
Floguard® single check valve, DZR brass	EB	1¼" FBSP	FLOW235007
Floguard® single check valve, DZR brass	EB	1½" FBSP	FLOW235008
Floguard® single check valve, DZR brass	EB	2" FBSP	FLOW235009



Backflow Prevention

Floguard® Double Check Valve

- Double check valves protect against the risk of backflow and back syphonage contaminations
- Compact lightweight construction for easy installation
- Allows high flow rate with minimum pressure drop, giving good flow rates
- Ideal for all class 3 contamination risks as per Water Supply (water fittings) Regulations 1999
- Available with a comprehensive selection of FBSP and compression type connections
- Integral test point for monitoring functioning of the downstream check valve

Product	Type	Size	Code
Floguard® mini double check valve, DZR brass	EC	15mm	FLOW230001
Floguard® mini double check valve, nickel	EC	15mm	FLOW230002
Floguard® compact double check valve, DZR brass	EC	22mm	FLOW230003
Floguard® double check valve, DZR brass	EC	28mm	FLOW230004
Floguard® double check valve, DZR brass	EC	½" FBSP	FLOW230005
Floguard® double check valve, DZR brass	EC	¾" FBSP	FLOW230006
Floguard® double check valve, DZR brass	EC	1" FBSP	FLOW230007
Floguard® double check valve, DZR brass	EC	1¼" FBSP	FLOW230008
Floguard® double check valve, DZR brass	EC	1½" FBSP	FLOW230009
Floguard® double check valve, DZR brass	EC	2" FBSP	FLOW230010



SharkBite® Double Check Valve

Product	Size	Code
Double Check Valve	15mm	SB2615



Hoseguard Bib Taps

- Combined double check valve hose union bib tap
- Prevents backflow contamination
- Available in quarter turn ball valve or BS 1010 screw down handle format
- Hose tail outlet
- Built in test point and drain down facility
- Conforms to water supply (water fittings) regulations, section 6
- DZR brass body
- Fits directly into a wall-plate elbow

Product	Size	Code
Hoseguard 1010 bib tap with check valves	½" MBSP	HTAP217008
Hoseguard ¼ turn lever tap with check valves	½" MBSP	HTAP217009



Tundishes

- Type AA backflow prevention
- Slimline design (some models)
- Straight or angled versions available
- Sizes from 15mm to 1½" FBSP

Product	Type	Size	Code
Tundish, straight plastic	AA	15mm x 22mm	TUND219005
Tundish, 90° plastic	AA	15mm x ¾" FBSP	TUND218024
Tundish, straight plastic	AA	22mm x 28mm	TUND219001
Tundish, straight plastic	AA	22mm x 1" FBSP	TUND218023
Tundish, straight epoxy steel	AA	1" x 1¼" FBSP	TUND300001
Tundish, straight plastic	AA	1¼" x 1½" FBSP	TUND300003
Tundish, straight epoxy steel	AA	1½" x 2" FBSP	TUND300004
Tundish, straight epoxy steel	AA	2½" x 3" FBSP	TUND300005



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

HEATING SYSTEM COMPONENTS

Versatile solutions specifically designed for precise control and safety of sealed heating systems.

- 25** Heating Controls
- 27** Heating System Expansion Vessels
- 28** Potable Water Expansion Vessels
- 29** Anti-Legionella Valves
- 30** Easifit Kits
- 31** Expansion Vessel Accessories
- 31** Pressure Relief Valves
- 33** Potable Pressure Relief Valves
- 35** Heating System Components
- 36** Pressure & Temperature Relief Valves



FEATURED PRODUCT:

Anti-Legionella Valve

The Anti-legionella valve converts a standard single connection expansion vessel into a 'flow through' type. It does this by diverting a portion of the flow into the vessel so that the water content is continually renewed.

The 3/4" valve has a rotatable tee-piece to allow flexibility upon installation.



Spotlight Features:



INCLUDES BALL VALVE

for simple maintenance



ROTATABLE TEE-PIECE

3/4" version



1/4" DRAIN PLUG

Other Features & Benefits:

- Maintains circulation through an expansion vessel
- Prevents stagnation
- Easy to install
- Can be used on any standard vessel with 3/4" or 1 1/4" connection (max wall mounting size 24L)



Heating Controls

Cylinder Thermostats

- Dual thermostat combines high limit and temperature control thermostat in one
- High limit restricts to maximum 82°C
- Temperature control for user flexibility
- Pockets available separately

Product	Code
Dual Thermostat 30-70°C 85mm Probe No Pocket	STAT500025
Single High Limit C/Out 82°C Thermostat Inc Pocket	STAT500030
Single Control Thermostat 30-90°C Inc Pocket	STAT500040
Copper Pocket For Dual Thermostats (85mm)	PCKT100005
Copper Pocket For Single Thermostats	PCKT100010



£

Contact Cylinder Thermostat

- Straps directly on to the pipework
- Tamperproof temperature adjustment
- Compact design
- Supplied complete with fixing strap

Product	Code
Contact Cylinder Thermostat	STAT900360



£

Two and Three Port Zone Valves

- Easy to use clip-on detachable head
- Pre-moulded plug and play cables supplied to connect to motorised head
- Metal manual operating lever for strength and stability
- The motorised head can be retrofitted to other manufacturers valve bodies

Product	Size	Code
2 Port Zone Valve	22mm	ZONE250205
2 Port Zone Valve	28mm	ZONE250215
3 Port Zone Valve	22mm	ZONE250210
Spare 230v Actuator Head For Reliance Zone Valves		SKIT250205



£

Wiring Centre

- Simplifies wiring installations
- Allows for easy access
- Safe means of connection

Product	Code
Wiring Centre	WIRE100002



£

Touchscreen Programmable Thermostats

- Available in black or white finish to suit all interior designs
- Seven day setting with six programmable events in each day
- Precise temperature control to +/- 1°C
- Ergonomic, unobtrusive, modern styling

Product	Code
Touchscreen Programmable Thermostat - Black	PROR100050
Touchscreen Programmable Thermostat - White	PROR100055
Remote Sensor	RSTA100050



★

Heating Controls

Programmable Room Thermostats

- Flexible programming: up to six events per day
- Industry standard backplate for ease of installation
- 7 day (or 5/2 day) programming
- Large, easy to read display

Product	Code
Programmable room thermostat	PROR100001



Electronic Room Thermostats

- Manual, easy grip adjustment dial
- Audible on/off click
- Slimline design
- Volt free option
- Industry standard backplate for ease of installation
- Temperature control accuracy of +/- 0.6°C
- Can produce energy savings of approximately 10% over and above those achieved by traditional units using older technology

Product	Code
Standard Electronic Room Thermostat with Neon	RSTA100005
Standard Electronic Room Thermostat Volt Free	RSTA100010



DID YOU KNOW?

Our Touchscreen Programmable Room Thermostats were specified and used in the Norwich House redevelopment in Streatham, London.

Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

Heating System Expansion Vessels

Aquasystem® Replaceable Membrane Heating Expansion Vessels

- Internal membrane prevents any water contact with the steel shell, stopping internal corrosion
- Huge choice of products from 2 litre to 5000 litre to cover all applications
- All versions supplied with a replaceable membrane meaning the vessel can be serviced without being removed
- Complete with pre-charge valve for topping up air pressure

Capacity	Pre-Set Pressure (Bar)	Max Pressure (Bar)	Height	Diameter	Water Connection	Code
2L	1.0	8.0	189mm	160mm	¾" MBSP	XVES100010
5L	1.0	8.0	304mm	160mm	¾" MBSP	XVES100020
8L	1.0	8.0	316mm	200mm	¾" MBSP	XVES100030
12L	1.0	8.0	295mm	280mm	¾" MBSP	XVES100040
18L	1.5	8.0	430mm	280mm	¾" MBSP	XVES100050
24L	1.5	8.0	489mm	280mm	¾" MBSP	XVES100060
35L	1.5	8.0	440mm	365mm	¾" MBSP	XVES100070
50L	1.5	8.0	564mm	365mm	¾" MBSP	XVES100080
80L	1.5	8.0	687mm	410mm	1" MBSP	XVES100090
100L	1.5	8.0	663mm	495mm	1" MBSP	XVES100100
150L	1.5	8.0	795mm	550mm	1" MBSP	XVES100110
200L	1.5	8.0	1085mm	600mm	1" MBSP	XVES100120
250L	1.5	8.0	1051mm	650mm	1" MBSP	XVES100130
300L	1.5	8.0	1212mm	650mm	1" MBSP	XVES100140
500L	1.5	8.0	1483mm	750mm	1¼" MBSP	XVES100150
750L	4.0	10.0	1820mm	800mm	2" MBSP	XVES100160
1000L	4.0	10.0	2160mm	800mm	2" MBSP	XVES100170
1500L	4.0	10.0	2360mm	960mm	2" MBSP	XVES050180
2000L	4.0	10.0	2555mm	1100mm	2" MBSP	XVES050190
3000L	4.0	10.0	2790mm	1200mm	DN65	XVES050200
4000L	4.0	10.0	3200mm	1450mm	DN80	XVES050210
5000L	4.0	10.0	3645mm	1450mm	DN80	XVES050220



£

DID YOU KNOW?

We supply a range of replacement membranes for both our heating and potable expansion vessels. Available for all sizes of vessel up to 5000l, contact us for more information and how to order.



Potable Water Expansion Vessels

£

Aquasystem® Replaceable Membrane Potable Water Expansion Vessels

- Stainless steel bolted flange prevents corrosion
- Extra wide membrane opening prevents noise caused by restricted flow
- Internal membrane prevents any water contact with the steel shell, stopping internal corrosion
- Huge choice of products from 2 litre to 5000 litre to cover all applications
- All versions supplied with a replaceable membrane meaning the vessel can be serviced without being removed
- Complete with pre-charge valve for topping up air pressure
- Suitable for both potable water and heating applications

Capacity and Colour	Pre-Set Pressure (Bar)	Max Pressure (Bar)	Height	Diameter	Water Connection	Code
White 2L	3.0	10.0	250mm	120mm	½" MBSP	XVES050010
White 5L	3.0	10.0	304mm	160mm	¾" MBSP	XVES050020
White 8L	3.0	10.0	316mm	200mm	¾" MBSP	XVES050030
White 12L	3.0	10.0	295mm	280mm	¾" MBSP	XVES050040
White 18L	3.0	10.0	430mm	280mm	¾" MBSP	XVES050050
White 24L	3.0	10.0	489mm	280mm	¾" MBSP	XVES050060
White 35L	3.0	10.0	440mm	365mm	¾" MBSP	XVES050070
Blue 50L	3.0	10.0	656mm	365mm	¾" MBSP	XVES050080
Blue 60L	3.5	10.0	783mm	365mm	1" MBSP	XVES050090
Blue 80L	3.5	10.0	810mm	410mm	1" MBSP	XVES050100
Blue 100L	3.5	10.0	849mm	495mm	1" MBSP	XVES050110
Blue 150L	3.5	10.0	975mm	550mm	1" MBSP	XVES050120
Blue 200L	3.5	10.0	1085mm	600mm	1¼" MBSP	XVES050130
Blue 300L	3.5	10.0	1240mm	650mm	1¼" MBSP	XVES050140
Blue 500L	3.5	10.0	1490mm	750mm	1¼" MBSP	XVES050150
Red 750L	4.0	10.0	1820mm	800mm	2" MBSP	XVES050160
Red 1000L	4.0	10.0	2160mm	800mm	2" MBSP	XVES050170
Red 1500L	4.0	10.0	2360mm	960mm	2" MBSP	XVES050180
Red 2000L	4.0	10.0	2555mm	1100mm	2" MBSP	XVES050190
Red 3000L	4.0	10.0	2790mm	1200mm	DN65	XVES050200
Red 4000L	4.0	10.0	3200mm	1450mm	DN80	XVES050210
Red 5000L	4.0	10.0	3645mm	1450mm	DN80	XVES050220

With Integral Bracket

Capacity and Colour	Pre-Set Pressure (Bar)	Max Pressure (Bar)	Height	Diameter	Water Connection	Code
White 8L	3.0	10.0	316mm	200mm	¾" MBSP	XVES050035
White 12L	3.0	10.0	295mm	280mm	¾" MBSP	XVES050045
White 18L	3.0	10.0	430mm	280mm	¾" MBSP	XVES050055
White 24L	3.0	10.0	489mm	280mm	¾" MBSP	XVES050065
White 35L	3.0	10.0	440mm	365mm	¾" MBSP	XVES050075



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Potable Water/Heating System Expansion Vessels

Potable Water Shock Arrestor

- Compact mini vessels can be fitted at the point of use to stop water hammer
- Stainless steel shell and flange prevent corrosion
- Complete with pre-charge valve for topping up air pressure

Capacity and Colour	Pre-Set Pressure (Bar)	Max Pressure (Bar)	Height	Diameter	Water Connection	Code
0.16L	5.0	15.0	105mm	65mm	½" MBSP	XVES050000
0.5L	5.0	15.0	160mm	95mm	½" MBSP	XVES050005
1L	5.0	15.0	195mm	114mm	½" MBSP	XVES050006
2L	5.0	15.0	220mm	130mm	½" MBSP	XVES050007

With Chrome Plated SharkBite® Adaptor

Capacity and Colour	Pre-Set Pressure (Bar)	Max Pressure (Bar)	Height	Diameter	Water Connection	Code
0.16L	5.0	15.0	105mm	65mm	½" MBSP	SBXVES050000

With Chrome Plated SharkBite® Tee

Capacity and Colour	Pre-Set Pressure (Bar)	Max Pressure (Bar)	Height	Diameter	Water Connection	Code
0.16L	5.0	15.0	105mm	65mm	½" MBSP	SBXVES030050



Aquasystem® Expansion Vessel Mounting Brackets

- Epoxy coated steel
- Complete with fixing screws and wall plugs

Product	Capacity	Size	Code
Wall mounting bracket	5L	160mm	BRKT240021
Wall mounting bracket	8L	200mm	BRKT240022
Wall mounting bracket	12L, 18L, 24L	280mm	BRKT240050
Wall mounting bracket (2 brackets recommended for this size)	35L, 50L	365mm	BRKT240051



Anti-Legionella Valves

Anti-Legionella Valve

- Maintains circulation through an expansion vessel
- Prevents stagnation
- Easy to install
- Includes ball valve for simple maintenance
- Can be used on any standard vessel with ¾" or 1¼" connection
- ¼" drain plug
- ¾" version includes rotatable tee-piece and wall bracket to support the valve and vessel

Product	Size	Code
Anti Legionella Valve	¾" FBSP	ANTI100001
Anti Legionella Valve	1¼" FBSP	ANTI100005



Easifit Kits

£

Easifit® Sealed System Kit

- Includes an expansion vessel with integrated bracket system for ease of installation
- The connection manifold is a one piece unit and requires no assembly
- Includes a WRAS approved filling loop with blanking caps
- Comes with an easy to read pressure gauge
- Union type connection to the expansion vessel can be orientated easily

Product	Size	Code
1.0 bar heating vessel, bracket & manifold - 5L	¾" MBSP	VESK209049
1.0 bar heating vessel, bracket & manifold - 8L	¾" MBSP	VESK209050
1.0 bar heating vessel, bracket & manifold - 12L	¾" MBSP	VESK209051
1.5 bar heating vessel, bracket & manifold - 18L	¾" MBSP	VESK209052
1.5 bar heating vessel, bracket & manifold - 24L	¾" MBSP	VESK209053
1.5 bar heating vessel, bracket & manifold - 35L	¾" MBSP	VESK209054
Easifit® manifold with filling loop and gauge	¾" MBSP	EASI209104
Easifit® manifold with gauge only	¾" MBSP	CORE209106
50mm dial up to 6.0 bar gauge	¼" MBSP back inlet	GAGE250001

SPECIFIERS TEXT: A WRAS 1999 compliant Sealed Heating System Kit. Suitable for new build or retro-fit installations. (Include correct product range codes for the Controls and Expansion Vessel Kits). Each kit includes expansion vessel, mounting bracket, pressure relief manifold, pressure gauge and combined filling loop/isolator/double check valve.



Easifit® Water Heater Kit

- Contains all required controls to install a small water heater
- Mix of control available for flexibility of design
- High quality materials
- Complied with G3 of regulations
- WRAS approved components

Product	Size	Code
2L, 15mm check valve & 15mm relief valve	15mm	COLK150000
2L, 15mm check valve	15mm	COLK150005
2L, with check valve & pressure reducing valve	15mm	COLK150010
2L, with check valve, pressure reducing valve & relief valve	15mm	COLK150015
2L, with inlet control valve	15mm	COLK150020
2L, with core unit	15mm	COLK150025



£

Expansion Vessel Accessories

Filmaster® Filling Loop

- 1/8" BSP test port on isolating double check valve
- 15mm compression connections
- Protects against Class 3 contamination risks
- Ball valve with lever for easy operation
- Comes with metal watertight blanking cap for additional security
- Thumb grip nuts on hose to allow quick connection/disconnection to mains supply

Product	Size	Code
Filmaster filling loop dual isolator c/w check valve	15mm	FIBV246208
Filling loop sealing cap and tag	1/2"	BCAP246200

Specifiers Text: WRAS 1999 compliant filling loop made up of WRAS listed components consisting of isoball valve and combined iso/dcv with test port (1/8"), flexible hose with manual connections. (Include correct product range code).



£



Filling Loop with Street Ends

- Suitable for direct connection to SharkBite® Metal Push-fit Fittings

Product	Size	Code
Filling Loop with Street Ends	15mm	SB2315ST



£



Auto Filling Group

- Allows permanent connection between cold mains and domestic sealed heating system, in line with current regulations
- Prevents costly call-backs caused by normal system pressure loss
- Integrated isolator (some models), CA backflow preventer and pressure reducing valve
- Makes the initial filling of a system much faster and easier
- WRAS approval pending

Product	Size	Code
Auto Filling Group with Isolator	1/2" FBSP	AFIL100001
Auto Filling Group without Isolator	1/2" FBSP	AFIL100005



★



Pressure Relief Valves

Sealed Heating System Pressure Relief Valve

- Diaphragm design gives improved resistance to scaling and extends the valves lifespan
- Straightforward removal of single piece cartridge allows access to seat for cleaning or cartridge replacement
- Set relief pressure range from 2.0 bar - 3.0 bar gives flexibility of system design
- Available with FSBP/FSBP or MBSP/FBSP connections, for complete installation flexibility

Product	Pressure (bar)	Size	Code
Sealed Heating System Pressure Relief Valve with gauge	3.0	1/2" Fx FBSP	PREL103003



£



100 & 101 Replacement Relief Valve Cartridges

Product	Pressure (Bar)	Size	Code
Red Pressure relief valve cartridge	2.0	3/4" and 1/2" valves	ZRC209020
Red Pressure relief valve cartridge	2.5	3/4" and 1/2" valves	ZRC209021
Red Pressure relief valve cartridge	3.0	3/4" and 1/2" valves	ZRC214043



£

Pressure Relief Valves

101 Series Sealed Heating System Pressure Relief Valves

£

- Diaphragm design gives improved resistance to scaling and extends the valve's lifespan
- Straightforward removal of single piece cartridge allows access to seat for cleaning or cartridge replacement
- Set relief pressure range from 2.0 bar to 3.0 bar gives flexibility of system design
- Available with FSBP/FSBP or MBSP/FBSP connections, for complete installation flexibility

Product	Pressure (Bar)	Size	Code
Pressure relief valve	2.0	½" FxFBSP	PREL101001
Pressure relief valve	2.5	½" FxFBSP	PREL101002
Pressure relief valve	3.0	½" FxFBSP	PREL101003
Pressure relief valve	2.0	½" MxFBSP	PREL101015
Pressure relief valve	2.5	½" MxFBSP	PREL101024
Pressure relief valve	3.0	½" MxFBSP	PREL101016
Pressure relief valve	2.0	¾" FxFBSP	PREL101011
Pressure relief valve	2.5	¾" FxFBSP	PREL101012
Pressure relief valve	3.0	¾" FxFBSP	PREL101013
Pressure relief valve	2.0	¾" MxFBSP	PREL101014
Pressure relief valve	2.5	¾" MxFBSP	PREL101027
Pressure relief valve	3.0	¾" MxFBSP	PREL101023



100 Series Sealed Heating System High Capacity Pressure Relief Valves

£

- Outlet one size larger than inlet, for high capacity discharge
- Provides protection against over pressurisation in wet heating systems
- Diaphragm design gives improved resistance against scale
- Cartridge design for ease of service and replacement without need to reset response pressure
- Set pressure range from 2.5 bar to 5.0 bar to suit any system requirement
- High lift design for increased discharge capacity

Product	Pressure (Bar)	Size	Code
Pressure relief valve	2.5	½" x ¾" FxFBSP	PREL100008
Pressure relief valve	3.0	½" x ¾" FxFBSP	PREL100001
Pressure relief valve	4.0	½" x ¾" FxFBSP	PREL100003
Pressure relief valve	5.0	½" x ¾" FxFBSP	PREL100004
Pressure relief valve	2.5	¾" x 1" FxFBSP	PREL100013
Pressure relief valve	3.0	¾" x 1" FxFBSP	PREL100014
Pressure relief valve	4.0	¾" x 1" FxFBSP	PREL100016
Pressure relief valve	5.0	¾" x 1" FxFBSP	PREL100028
Pressure relief valve	2.5	1" x 1¼" FxFBSP	PREL100022
Pressure relief valve	3.0	1" x 1¼" FxFBSP	PREL100023
Pressure relief valve	4.0	1" x 1¼" FxFBSP	PREL100025
Pressure relief valve	5.0	1" x 1¼" FxFBSP	PREL100027
Pressure relief valve	2.5	1¼" x 1½" FxFBSP	PREL100032
Pressure relief valve	3.0	1¼" x 1½" FxFBSP	PREL100033
Pressure relief valve	4.0	1¼" x 1½" FxFBSP	PREL100034
Pressure relief valve	5.0	1¼" x 1½" FxFBSP	PREL100036
Pressure relief valve	2.5	1½" x 2" FxFBSP	PREL100044
Pressure relief valve	3.0	1½" x 2" FxFBSP	PREL100041
Pressure relief valve	4.0	1½" x 2" FxFBSP	PREL100042
Pressure relief valve	5.0	1½" x 2" FxFBSP	PREL100046
Pressure relief valve	2.5	2" x 2½" FxFBSP	PREL100052
Pressure relief valve	3.0	2" x 2½" FxFBSP	PREL100049
Pressure relief valve	4.0	2" x 2½" FxFBSP	PREL100050
Pressure relief valve	5.0	2" x 2½" FxFBSP	PREL100055



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Potable Pressure Relief Valves

104 Series High Capacity Potable Water Pressure Relief Valves

- Rapid removal of single piece cartridge for cleaning or replacement
- Diaphragm design gives improved resistance scale
- Multiple connections for flexible installation
- Set relief pressure range from 3.5 - 8.0 bar

Product	Pressure (Bar)	Size	Code
Pressure relief valve	3.5	1/2" x 3/4" FBSP x FBSP	PREL104040
Pressure relief valve	5.0	1/2" x 3/4" FBSP x FBSP	PREL104041
Pressure relief valve	6.0	1/2" x 3/4" FBSP x FBSP	PREL104008
Pressure relief valve	8.0	1/2" x 3/4" FBSP x FBSP	PREL104006
Pressure relief valve	3.5	3/4" x 1" FBSP x FBSP	PREL104042
Pressure relief valve	5.0	3/4" x 1" FBSP x FBSP	PREL104014
Pressure relief valve	6.0	3/4" x 1" FBSP x FBSP	PREL104010
Pressure relief valve	8.0	3/4" x 1" FBSP x FBSP	PREL104016
Pressure relief valve	3.5	1" x 1 1/4" FBSP x FBSP	PREL104043
Pressure relief valve	5.0	1" x 1 1/4" FBSP x FBSP	PREL104001
Pressure relief valve	6.0	1" x 1 1/4" FBSP x FBSP	PREL104002
Pressure relief valve	8.0	1" x 1 1/4" FBSP x FBSP	PREL104017
Pressure relief valve	3.5	1 1/4" x 1 1/2" FBSP x FBSP	PREL104044
Pressure relief valve	5.0	1 1/4" x 1 1/2" FBSP x FBSP	PREL104045
Pressure relief valve	6.0	1 1/4" x 1 1/2" FBSP x FBSP	PREL104005
Pressure relief valve	8.0	1 1/4" x 1 1/2" FBSP x FBSP	PREL104013
Pressure relief valve	3.5	1 1/2" x 2" FBSP x FBSP	PREL104046
Pressure relief valve	5.0	1 1/2" x 2" FBSP x FBSP	PREL104047
Pressure relief valve	6.0	1 1/2" x 2" FBSP x FBSP	PREL104012
Pressure relief valve	8.0	1 1/2" x 2" FBSP x FBSP	PREL104020
Pressure relief valve	3.5	2" x 2 1/2" FBSP x FBSP	PREL104048
Pressure relief valve	5.0	2" x 2 1/2" FBSP x FBSP	PREL104049
Pressure relief valve	6.0	2" x 2 1/2" FBSP x FBSP	PREL104015
Pressure relief valve	8.0	2" x 2 1/2" FBSP x FBSP	PREL104023



£

102 and 104 Series Replacement Pressure Relief Cartridge

Product	Pressure (Bar)	Size	Code
Blue Pressure relief valve cartridge	3.5	3/4" & 1/2" valves	ZRC214031
Blue Pressure relief valve cartridge	5.0	3/4" & 1/2" valves	ZRC214048
Blue Pressure relief valve cartridge	6.0	3/4" & 1/2" valves	ZRC214004
Blue Pressure relief valve cartridge	8.0	3/4" & 1/2" valves	ZRC214009



£

107 Series Potable Water Pressure Relief Valves

- Rapid removal of single piece cartridge for cleaning or replacement
- Allows a high capacity discharge
- Diaphragm design gives improved resistance against scale
- Protects against over pressurisation
- Multiple connections for flexible installation
- Set relief pressure range from 3.5-6.0 bar
- Maximum temperature of 110°C

Product	Pressure (Bar)	Size	Code
Pressure relief valve	6.0	1/2" MBSP x 1/2" FBSP	PREL107010
Pressure relief valve	6.0	1/2" MBSP x 1/2" FBSP	PREL107015
Pressure relief valve	3.5	1/2" MBSP x 15mm	PREL107020
Pressure relief valve	5.0	1/2" MBSP x 15mm	PREL107025



£

Potable Pressure Relief Valves

£

102 Series Potable Water Pressure Relief Valves

- Rapid removal of single piece cartridge for cleaning or replacement
- Diaphragm design gives improved resistance scale
- Multiple connections for flexible installation
- Set relief pressure range from 3.5 - 8.0 bar

Product	Pressure (Bar)	Size	Code
Pressure relief valve	3.5	½" FBSP x FBSP	PREL102014
Pressure relief valve	5.0	½" FBSP x FBSP	PREL102008
Pressure relief valve	6.0	½" FBSP x FBSP	PREL102001
Pressure relief valve	8.0	½" FBSP x FBSP	PREL102004
Pressure relief valve	3.5	½" MBSP x FBSP	PREL102040
Pressure relief valve	5.0	½" MBSP x FBSP	PREL102041
Pressure relief valve	6.0	½" MBSP x FBSP	PREL102042
Pressure relief valve	8.0	½" MBSP x FBSP	PREL102043
Pressure relief valve	3.5	½" MBSP x 15mm	PREL102009
Pressure relief valve	5.0	½" MBSP x 15mm	PREL102003
Pressure relief valve	6.0	½" MBSP x 15mm	PREL102005
Pressure relief valve	8.0	½" MBSP x 15mm	PREL102044
Pressure relief valve	3.5	¾" FBSP x FBSP	PREL102045
Pressure relief valve	5.0	¾" FBSP x FBSP	PREL102046
Pressure relief valve	6.0	¾" FBSP x FBSP	PREL102031
Pressure relief valve	8.0	¾" FBSP x FBSP	PREL102047
Pressure relief valve	3.5	¾" MBSP x FBSP	PREL102048
Pressure relief valve	5.0	¾" MBSP x FBSP	PREL102118
Pressure relief valve	6.0	¾" MBSP x FBSP	PREL102018
Pressure relief valve	8.0	¾" MBSP x FBSP	PREL102024
Pressure relief valve	3.5	¾" MBSP x 22mm	PREL102020
Pressure relief valve	5.0	¾" MBSP x 22mm	PREL102049
Pressure relief valve	6.0	¾" MBSP x 22mm	PREL102027
Pressure relief valve	8.0	¾" MBSP x 22mm	PREL102050



Protecto® YC

- For protection of water systems from debris
- Compression connections for simple, low cost installation
- Compact DZR brass body
- Access port to sleeve filter allows servicing without need to replace
- O ring seal on access port for ease of service
- Dual thickness gauze for improved resistance to damage
- Stainless steel 60 mesh filter
- Available with SharkBite® Metal Push-fit connectors for even quicker installation

Product	Size	Code
Protecto® YC	15mm	LINS400001
Protecto® YC, nickel plated	15mm	LINS400101
Protecto® YC, nickel plated	15mm pushfit	SBLINS400101
Protecto® YC	22mm	LINS400002
Protecto® YC	28mm	LINS400006
Protecto® YC	1"	LINS400007
Protecto® YC	1¼"	LINS400008
Protecto® YC	1½"	LINS400009
Protecto® YC	2"	LINS400010



★

Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Heating System Components

Automatic Anti-vacuum Valves

- Automatic protection against a vacuum forming in hot water installation
- Solid brass body for long life
- Easy access to the internals from the top of the valve
- Quick and simple service



Product	Size	Code
Automatic anti vacuum valve	1/2" MBSP	ADMT503001
Automatic anti vacuum valve	3/4" MBSP	ADMT503010
Automatic anti vacuum valve with pop-up indicator	15mm	ADMT503004
Automatic anti vacuum valve with pop-up indicator	22mm	ADMT503005

Differential By-Pass Valves

- Easy to operate and set the differential opening pressure
- Automatically stabilises circulation flow rate in pumped heating systems when the thermostatic radiator or zone valves close, thus protecting the pump against a closed head
- Easily adjustable differential pressure setting reduces commissioning time
- Virtually maintenance-free once installed



Product	Size	Code
Differential by-pass (straight)	22mm	DIFF300005
Differential by-pass (angled)	22mm	DIFF300001

Automatic Air Vent

- Automatically vents trapped air from within a sealed heating system
- Saves time and cost when commissioning new heating systems
- Solid brass construction and heat resistant polypropylene float give long life and dependability
- Available in 3/8", 1/2" and 15mm connections
- Reduces call backs to rectify air locks, saving time and money



Product	Size	Code
Automatic air vent	3/8"	AVEN100001
Automatic air vent	1/2"	AVEN100005
Automatic air vent	15mm COMP	AVEN100003
Automatic air vent for underfloor heating	1/2"	AVEN450001

SPECIFIERS TEXT: A solid brass automatic air vent for use in sealed heating systems, available in 3/8" or 1/2" MBSP connection formats (include correct product range code).

Pressure & Temperature Relief Valves

TPR28 Pressure & Temperature Relief Valve

- Protects against temperature rising over 95°C
- Prevents over pressurisation
- Lever style easing mechanism

Product	Probe length	Inlet & Outlet	Pressure Outlet (Bar)	Code
P&T	195mm	1" MBSP x 28mm	7.0	PTEM100050



FVMX Pressure and Temperature Relief Valve

- High capacity protection
- Protects against temperature rising above 95°C
- Prevents over pressurisation
- Lever style easing mechanism

Product	Probe length	Inlet & Outlet	Pressure Outlet (Bar)	Code
Lever top P&T	112mm	3/4" MBSP x 28mm	7.0	PTEM600001
Lever top P&T	120mm	1" MBSP x 1" FBSP	7.0	PTEM600002
Lever top P&T	100mm	1 1/4" MBSP x 1" FBSP	7.0	PTEM600003
Lever top P&T	80mm	1 1/2" MBSP x 1 1/2" FBSP	7.0	PTEM600004
Lever top P&T	65mm	2" MBSP x 2" FBSP	7.0	PTEM600005



Cash Acme® Pressure & Temperature Relief Valves

- Protects against temperature rising above 95°C
- Prevents over pressurisation
- Lever Top release mechanism
- Range of different pressure settings and different probe lengths available

Product	Probe length	Inlet & Outlet	Pressure Outlet (Bar)	Code
P&T	95mm	1/2" x 15mm	6.0	PTEM510001
P&T	95mm	1/2" x 15mm	7.0	PTEM510002
P&T	95mm	1/2" x 15mm	10.0	PTEM510003



TPR15 & TPR22 Pressure & Temperature Relief Valves

- Protects against temperature rising above 95°C
- Prevents over pressurisation
- Twist top cartridge design for easy servicing
- Complete with PTFE coating (some models)
- Range of different pressure settings and different probe lengths available
- Type TPR15/22

Product	Probe length	Inlet & Outlet	Pressure Outlet (Bar)	Code
P	95mm	1/2" x 15mm	7.0	PTEM550852
P&T PTFE Coated	95mm	1/2" x 15mm	10.0	PTEM550853
P&T PTFE Coated	95mm	1/2" x 15mm	7.0	PTEM550854
P&T PTFE Coated	95mm	1/2" x 15mm	4.5	PTEM550856
P&T PTFE Coated	95mm	1/2" x 15mm	6.0	PTEM550857
P&T	40mm	1/2" x 15mm	7.0	PTEM550870
P&T	195mm	1/2" x 15mm	7.0	PTEM550951
P&T	195mm	15mm x 15mm	7.0	PTEM550953
P&T	95mm	15mm x 15mm	7.0	PTEM550954
P&T	195mm	3/4" x 15mm	10.0	PTEM550955
P&T	95mm	3/4" x 22mm	4.5	PTEM575200
P&T	95mm	3/4" x 22mm	7.0	PTEM575205
P&T	95mm	3/4" x 22mm	10.0	PTEM575210
P&T	195mm	3/4" x 22mm	7.0	PTEM575250



WASHROOM SYSTEMS

Standards compliant, complete system solutions for healthcare, education and commercial washroom applications.

- 39 TMV3 Thermostatic Taps
- 41 TMV3 Shower Valves
- 42 Shower Kits
- 42 TMV2 Thermostatic Bath Shower Mixers
- 43 Timeflow Taps
- 44 Timeflow Valves
- 44 Shower Panels
- 46 Timeflow Showers
- 47 Exposed & Concealed Showerheads
- 47 Touch Sensitive Electronic Controls
- 48 Washroom & Urinal Flush Controls



FEATURED PRODUCT:

Caremix® Prime T3 Wall Mountable Thermostatic Tap



The Caremix® Prime T3 is a sequential D08 approved thermostatic tap typically used in areas with a panel system where the tap is mounted on a wall or panel with a void behind which carries the service pipework, as is common in many commercial sites. It is perfectly suited for high risk environments such as hospitals or nursing homes to protect vulnerable users from being scalded by hot water.

Spotlight Features:



CAREMIX® CARTRIDGE

Uses our unique one-piece thermostatic cartridge to reduce maintenance time



HANDLE OPTIONS

Available with a standard short handle or extended handle for ease of operation



PVD COATING

resists scratching and deterioration of the chrome finish

Other Features & Benefits:

- Incorporates a special cool touch design to prevent the tap body from reaching dangerous temperatures
- The valve design includes quick release covers for easy access to isolation, check valves, flow regulators and filters to reduce testing and maintenance times
- Bioguard spout as standard
- Viton o-rings



TMV3 Thermostatic Taps

Caremix® Prime S3 Monobloc TMV3 Approved Thermostatic Taps

- Uses the unique Reliance one piece thermostatic cartridge to reduce maintenance time
- Supplied with a special PVD coating to resist scratching and deterioration of the chrome finish
- Copper connection tails to eliminate the possibility of bacteria breeding in rubber hoses
- Available with a standard short handle or extended handle to be suitable for all applications
- Supplied with two combination valves incorporating isolation, check valves, flow regulators and filters

Product	Size	Code
Caremix® Prime S3 Monobloc thermostatic tap	15mm	CTAP105001
Caremix® Prime S3 monobloc thermostatic tap with extended lever	15mm	CTAP105002
Caremix® Prime S3 monobloc thermostatic tap with stainless steel tails	15mm	CTAP105070

SPECIFIERS TEXT:

A sequentially controlled mono block thermostatic tap for deck mounting applications, must include Viton O-rings and seals, a one-piece thermostatic cartridge, combination isolating valves with removable and serviceable strainers, check valves and flow regulators for both hot and cold supplies. The tap should be provided with 15mm copper tails for connection to the supplies as per RWC Caremix® S3 range



Caremix® Prime T3 Wall Mounted TMV3 Approved Thermostatic Taps

- Uses the unique Reliance one piece thermostatic cartridge to reduce maintenance time
- Incorporates a special cool touch design to prevent the tap body from reaching dangerous temperatures
- Supplied with a special PVD coating to resist scratching and deterioration of the chrome finish
- The valve design includes isolation, check valves, flow regulators and filters in front of wall to reduce testing and maintenance times
- Available with a standard short handle or extended handle to be suitable for all applications

Product	Size	Code
Caremix® T3 wall mountable TMV3 approved thermostatic tap	15mm	CTAP105005
Caremix® T3 wall mountable TMV3 approved thermostatic tap with extended lever (for hospital use)	15mm	CTAP105006

SPECIFIERS TEXT: A sequentially controlled two-hole thermostatic tap for wall mounting applications, must include a cool touch design, Viton O-rings and seals, a one-piece thermostatic cartridge, integral isolating valves accessible from in front of the wall panel, and removable and serviceable strainers, check valves and flow regulators on both hot and cold supplies. The tap body must be demountable for service without removal of the integral isolating valves. As per RWC Caremix® T3 range



Caremix® Prime H3 Deck Mounted 2 Hole TMV3 Approved Thermostatic Taps

- Uses the unique Reliance one piece thermostatic cartridge to reduce maintenance time
- Incorporates a special cool touch design to prevent the tap body from reaching dangerous temperatures
- The valve design includes isolation, check valves, flow regulators and filters in front of wall to reduce testing and maintenance times
- Supplied with a special PVD coating to resist scratching and deterioration of the chrome finish
- Available with a standard short handle or extended handle to be suitable for all applications

Product	Size	Code
Caremix® H3 deck mounted 2 hole TMV3 approved thermostatic tap	15mm	CTAP105010
Caremix® Prime H3 deck mounted 2 hole thermostatic tap with extended lever	15mm	CTAP105011

SPECIFIERS TEXT: A sequentially controlled two-hole thermostatic tap for deck mounting applications, must include a cool touch design, Viton O-rings and seals, a one-piece thermostatic cartridge, integral isolating valves accessible from above the basin or countertop, and removable and serviceable strainers, check valves and flow regulators on both hot and cold supplies. The tap body must be demountable for service without removal of the integral isolating valves. As per RWC Caremix® H3 range



TMV3 Thermostatic Taps

Caremix® Thermostatic Cartridge

- Caremix® thermostatic cartridge can be used across all Reliance thermostatic products - thermostatic taps, mixing valves, showers & shower panels
- Minimises the cost and complexity of stocking spares



Product	Code
Caremix® Thermostatic cartridge	SKIT100008

Caremix® Tap Spares

Product	Size	Code
Disinfection Flushing Hose for Caremix® Taps		FLSE100010
Biocare Anti-Bacterial Flow Straightener		ZBST100005
Flow straightener		ZBST100001
Replacement standard handle		ZNOB100001
Replacement extended handle		ZNOB100002
Spare isolating valve 3lpm including check valve	15mm	SERV950100
Indice for Caremix® S3 tap		INDC100005
Indice for Caremix® H3 tap		INDC100006
Indice for Caremix® T3 tap		INDC100007
End indice for Caremix® taps (except S3)		INDC100008
Check cartridge for Caremix® taps (except S3)		ZCC225017
Strainer for Caremix® taps (except S3)		ZSTR100001
3 lpm flow regulator for Caremix® taps (except S3)		ZREG100001
Chrome covers for Caremix® taps (except S3)		COVR100001
Check valve, filter and regulator, one piece		SKIT100003



Shield

TMV3 Approved Thermostatic Basin Mixer

- Caremix® thermostatic cartridge can be used across all Reliance thermostatic products - thermostatic taps, mixing valves, showers & shower panels
- Minimises the co
- Thermostatic sequential basin tap
- Simple to operate single lever handle
- Easy to install, supplied complete with flexible tails and check valves
- Approved for NHS model engineering specification D08
- Suitable for low and high pressure systems
- Copper connection tails to eliminate the possibility of bacteria breeding in rubber hoses and complexity of stocking spares



Product	Size	Code
Shield TMV3 Thermostatic Basin Mixer	15mm	CTAP100100



Our new **product rating systems** allows you to find the **right product every time.**



TMV3 Shower Valves

Caremix® E3 Exposed Sequential Shower

- TMV3 approved for healthcare applications
- Uses the unique Reliance one piece thermostatic cartridge to reduce maintenance time
- Provided with rotational elbows to suit any pipework orientation
- Supplied with top or bottom outlets to suit flexible hoses or fixed risers giving maximum installation flexibility
- Supplied complete with check valves, strainers and flow regulators, all serviceable from in front of the wall

Product	Size	Code
Showerguard E3 Exposed Sequential Control Shower	15mm	SHOW153100
Showerguard E3 Lever Control Knob		ZNOB153100
Showerguard E3 Chrome Pipe Coverplates		ZCOV153100
Showerguard E3 Printer Handle Indice		INDC153100
Showerguard E3 Strainer With Brass Adaptor		ZSTR153100



Caremix® C3 Concealed Sequential Shower

- Supplied with a specially designed installation box and wall template to make installation quick and easy
- Designed so that after installation all components are serviceable and replaceable following removal of the cover plate
- TMV3 approved for healthcare applications
- Uses the unique Reliance one piece thermostatic cartridge to reduce maintenance time
- Supplied complete with isolators, check valves, strainers and flow regulators all serviceable from in front of the wall

Product	Size	Code
Showerguard C3 Concealed Sequential Control Shower	15mm	SHOW153150
Showerguard C3 Mixer Unit (First Fix)	15mm	SHOW153160
Showerguard C3 Facia Plate & Handle (Second Fix)		SHOW153165
Showerguard C3 Lever Control Knob		ZNOB153150
Showerguard C3 Printer Handle Indice		INDC153150
Showerguard C3 Chrome Coverplate		ZPLT153250
Showerguard C3 Inlet Washer / Strainers		ZWAS153150
Showerguard C3 Cover Plate Screw		ZSCR153150



TWO-STEP SHOWER INSTALLATION.

The Reliance two-step shower installation is another example of how we're at the forefront of washroom innovation.

During the construction phase, concealed showers – supplied with a plastic cover over the shower outlet – are installed before the walls are plastered to ensure a flush fitting. This is the 'first fix'. The 'second fix' simply involves removing this plastic cover and replacing it with a chrome faceplate during the final fit-out. This unique installation prevents scratching or damage to the faceplates during building work. There are also no lost parts - the faceplates are packed separately and can be retained in stores until they are needed.

FIRST FIX

Fit the concealed shower and outlet unit during construction phase



SECOND FIX

Remove the temporary cover and fit the chrome face plate during final fit out



Shower Kits

Reliance Shower Kit

- Kits includes curved riser rail, push-button adjuster bar, single or multimode handset, 1.5m hose and retaining ring

Product	Size	Code
Reliance Shower Kit, multimode	1/2"	SFIT153200
Reliance Shower Kit, multimode - concealed	1/2"	SFIT153250
Reliance Shower Kit, single mode, smooth hose	1/2"	SFIT450001
Wall outlet for concealed shower kit	1/2" FBSP x 1/2" MBSP	OUTL400010

Accessories & Spares

Product	Size	Code
1.5m hose		HOSE400001
2m hose		HOSE400005
Retaining ring for concealed shower kit		RING400001
Retaining ring for exposed shower kit		RING400030
Non split retaining ring for shower kits	25mm	RING100063



TMV2 Thermostatic Bath Shower Mixers & TMV2 Bar Showers

Heatguard® Bath Shower Mixer Valves

- Rapid failsafe on both hot and cold supply failure
- Provides stable mixed water temperature
- Includes check valve, strainer and flow regulator
- Part G compliant
- Diverter between bath and shower integral in flow control
- Both deck and wall mounted versions available
- Deck mounted version comes with isolators accessible from above the bath
- Optional wall mounting bracket available

Product	Size	Code
Deck mounted bath shower mixer	3/4"	THRM700001
Wall mounted bath shower mixer	3/4"	THRM700050
Wall Mounting Bracket	3/4"	BRKT700100
Flow Control Handle		ZNOB700001
Temperature Control Handle With Override Button		ZNOB700002
Flow Cartridge		SKIT700001
BSM/Bar Shower Thermostatic Cartridge		SKIT700002
BSM/Bar ShowerFlow Straightener		ZBST700001
BSM/Bar Shower Cover and Z Connector including check valve	3/4 x 1/2"	ZKIT700001
Deck Mounting Pillar Including Check Valve		PILL700001



Heatguard® Bar Showers

- Two cartridge principle controlling flow and temperature
- Rapid failsafe on both hot and cold supply failure
- Provides stable mixed water temperature
- Includes check valve, strainer and flow regulator
- Optional wall mounting bracket available
- Economical flow with user override buttons

Product	Size	Code
Bar Shower	3/4"	THRM700060
Bar Shower c/w kit	3/4"	THRM700070
BSM Wall Mounting Bracket	3/4"	BRKT700100
BSM/Bar Shower Temp Control Handle With Override Button		ZNOB700002
BSM/Bar Shower Thermostatic Cartridge		SKIT700002
Bar Shower Flow Cartridge		SKIT700006
Bar Shower Flow Cartridge Adaptor		ZADP700060
BSM/Bar Shower Cover and Z Connector including check valve		ZKIT700001



Timeflow Taps

606 and 506 Series Timeflow Basin and Bib Taps

- Supplied with an easily serviced one-piece cartridge
- Patented, technologically advanced mechanism provides a long working life and consistent run times
- One tap for both hot and cold can simplify stockholding and spares
- Security versions ensure the flow does not start until the button is released to prevent vandalism
- 15 second timed flow rate as per BS EN 816
- Saves up to 60% of water consumption when compared to conventional taps

Product	Size	Code
606 Basin Tap	½" MBSP	PUSH200000
506 Bib Tap	½" MBSP	PUSH200020
Cartridge for 606/506 T/Flow Taps		SKIT200060



706 Series Timeflow Basin and Bib Taps

- 360° lever operation for ease of use by the less able
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- One tap for both hot and cold can simplify stockholding and spares
- Saves up to 60% of water consumption when compared to conventional taps
- 15 second timed flow rate as per BS EN 816

Product	Size	Code
706 Basin Lever Tap	½" MBSP	PUSH200040



4000s Timeflow Basin and Mixer Tap

- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- Comes with an easily serviced one-piece cartridge
- Saves up to 60% of water consumption when compared to conventional taps
- 15 second timed flow rate as per BS EN 816

Product	Size	Code
4000 S Security Series Timeflow Basin Mixer Tap c/w Isolating Valves, Check Valves and Strainers	15mm	PUSH200070
Replacement cartridge		SKIT200070



Reliance Timeflow Bib Taps

- Supplied with an easily serviced one-piece cartridge
- One tap for both hot and cold can simplify stockholding and spares
- Includes both red and blue indices
- 15 seconds timed flow rate as per BS EN 816
- Saves up to 60% water consumption when compared with conventional taps
- Anti-vandal through self-closing

Product	Size	Code
Reliance Timeflow Bib Tap	½"	PUSH400100



712 Series Knee Operated Timeflow Valve

- A flexible extended plastic lever allows 360° operation so activation on the timed flow can be done with knee or hip when it is not desirable to use the hands
- Provided with a wall mounting bracket and screws
- Saves up to 60% of water consumption when compared to conventional taps
- 15 second timed flow rate as per BS EN 816

Product	Size	Code
712 Series Knee Operated Valve	15mm	PUSH200090
Cartridge for 712 Knee Operated Timeflow Valve		SKIT200130



Timeflow Valves

Timeflow Control Tool Kit

- Manufacturers kit, containing bespoke tools for installation and maintenance of timeflow controls, supplied in a convenient box for storage and transport
- For use with 2000 and 2000 S series basin taps, allows for easy removal/access to the flow regulator and cartridge for service adjustment
- Allen key and screwdriver provide for access to the cartridge / control knob, for use on the DL400SE shower panel
- Contains low profile spanner for use with the 503 showers for removal of the head and access to cartridge
- Allows for easy removal / access to the cartridge for service or replacement on the 4000 S Basin Mixer tap



Product	Code
Timeflow Control Tool Kit	TOOL100001

Shower Panels

DL400 SE Slimline Timeflow Shower Panels

- Low Profile shower, fits tight to the wall and does not encroach into showering area
- Easy touch control to activate the flow of water, ideal for children and the elderly
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- Scale resistant, easy to clean, moveable or lockable shower head with integral flow regulator
- Top or back entry variants available, both supplied with isolating valves for ease of installation and maintenance
- Saves up to 60% of water consumption compared to conventional showers

Product	Size	Code
DL400 SE Shower Panel Exposed Slimline Grey	15mm	PANL400000
DL400 SE Shower Panel Concealed Slimline Grey	15mm	PANL400020
Cartridge for DL400 SE T/Flow Shower Panel		SKIT400000
Push Button for DL400SE Shower Panel		ZNOB400020
Control Knob Trigger DL400SE Shower Panel		ZFIX400020



200 Series Caremix® Shower Panel

- Lever operated thermostatic control for ease of use, comfort and safety
- Uses the unique Reliance one-piece thermostatic cartridge to reduce maintenance time
- All internal pipe connections are made in copper to eliminate the possibility of bacteria breeding in rubber hoses
- Complete prefabricated shower, giving reduced installation times and value for money
- Ideal for retrofit installations to cover over old installation holes
- Top or back entry, grey and ivory versions available to suit many different applications

Product	Size	Code
200 Series Thermostatic Sequential Control Shower Panel - Exposed TMV3 Top In - Fixed Head Grey	15mm	PANL500200
200 Series Thermostatic Sequential Control Shower Panel - Exposed Thermostatic TMV3 Top In - Variable Riser Rail Grey	15mm	PANL500210
200 Series Thermostatic Sequential Control Shower Panel - Exposed TMV3 Top In - Fixed Head Ivory	15mm	PANL500205
200 Series Thermostatic Sequential Control Shower Panel - Exposed TMV3 Top In - Variable Riser Rail Ivory	15mm	PANL500215
Caremix® Thermostatic cartridge		SKIT100008



Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

Shower Panels

Shower Panel Optional Extras

- Anti-ligature panel gasket - negates need for silicone sealant and prevents contamination
- Anti-ligature quick release couplings - to allow quick release/reconnection of hose and handset in high risk environments
- Ceiling trim


Product	Size	Code
Ceiling Trim For Shower Panels		PBAR100001
EPDM Foam Gasket Curved	316 x 10 x 1mm	GSKT100001
EPDM Foam Gasket	1220 x 210 x 10mm	GSKT100005
Quick Release Coupling Unvalve	½" FBS	ZADP500270
Quick Release Coupling	½" MBSP	ZADP500275



Shower Panel Finishing Profile System


- Extends shower panel cover to floor and/or ceiling

Product	Code
Shower Panel Finishing Profile system 400mm Grey	COVR400400
Shower Panel Finishing Profile system 400mm Ivory	COVR400405
Shower Panel Finishing Profile system 800mm Grey	COVR400800
Shower Panel Finishing Profile system 800mm Ivory	COVR400805



DID YOU KNOW?

Reliance's DL400 SE Shower Panel features in the Bangor Aurora Aquatic and Leisure Complex. The pre-plumbed, slimline shower panels combine water efficiency, reliability and straightforward maintenance with simple touch controls for ease of use.

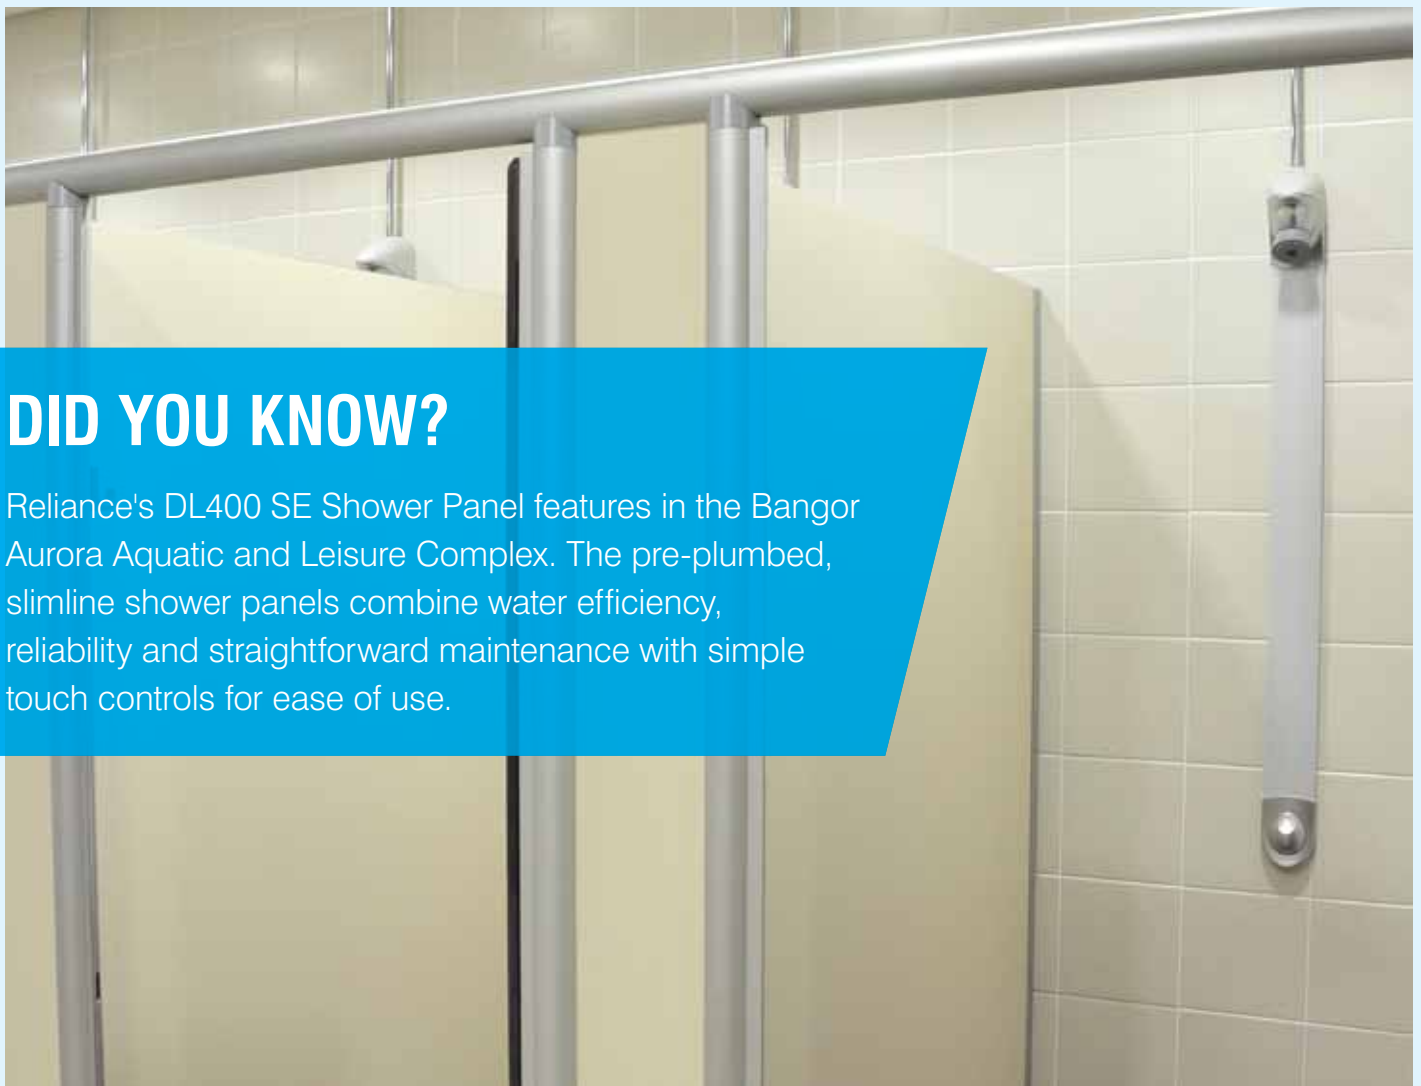

Timeflow Showers

503 ER Series Exposed Timeflow Showers

- Complete kit including shower head, fixings and the timeflow control
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- Comes with an easily serviced one-piece cartridge
- Provided with 3/4" union connections and 15mm reducers for flexibility in installation
- Saves up to 60% of water consumption when compared to conventional showers
- 30 seconds timed flow control as per BS EN 816

Product	Size	Code
503 E Exposed Timeflow Shower Valve only	15mm	SELF200025
Spare Cartridge for 503 ER		SKIT200025



Alpa Series Timeflow Mixer Showers

- Easy to use single operation, push to activate flow, turn to change temperature
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- Available as exposed shower kits, exposed valve only or concealed version to cover all applications
- Exposed versions come with angled union connections including isolation for ease of servicing and maintenance

Product	Size	Code
Alpa Series Timeflow Mixer Shower with Fixed Showerhead Kit	1/2" MBSP	MIXS200005
Spare Cartridge Alpa Series - exposed		SKIT200000
Spare Cartridge Alpa Series - concealed		SKIT200005



Reliance Exposed Timeflow Showers

- Includes shower head, fixings and the timeflow control
- No-concussive (self closing)
- Saves water consumption
- Ideal for public facilities
- 15-20 second flow time

Product	Code
Reliance Timeflow Shower with kit	SELF300210
Reliance Timeflow Shower	SELF300200



Reliance Concealed Timeflow Shower

- Non-Concussive (self-closing), anti-vandal push button control
- Saves water consumption
- Ideal for public facilities
- 15-20 second flow time
- WRAS pending

Product	Size	Code
Reliance Concealed Timeflow Shower	15mm	SELF300205



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Exposed & Concealed Showerheads

700 Series Anti-Vandal Showerheads

- Ultra low profile, smooth anti-ligature surfaces prohibit any attachments being made, preventing vandalism and providing safety
- The central spray grid can easily be removed and cleaned at maintenance times
- Anti-rotation pins prevent any unauthorised movement

Product	Size	Code
700 Series Showerhead - Fixed Vandal Proof 0 - 200mm Wall	½" MBSP	HEAD300050



Anti-Ligature Showerheads

- Ultra low profile, smooth anti-ligature surfaces prohibit any attachments being made, preventing vandalism and providing safety
- The central spray grid can easily be removed and cleaned at maintenance times
- Anti-rotation pins prevent any unauthorised movement

Product	Size	Code
Cross wall anti ligature showerhead 1 - 150mm	½" MBSP	SENS510115
Panel mount anti ligature showerhead 1 - 50mm	½" MBSP	SENS510120



Touch Sensitive Electronic Controls

Senselec® TS2 Switch Options

- Low profile touch sensor in cross-wall or panel mount configurations, or solid wall touch sensor to allow freedom of system design
- Durable and sealed switches (IP68) to prevent vandalism and increase reliability
- Solid brass housing, chrome plated, for long life and resistance to corrosion and tampering
- One shot electronic actuation tested to 500,000 operations to give complete installer confidence
- Available in red and blue colour coded versions with Reliance lettering and the word 'PUSH' laser etched into the base metal to instruct user
- Supplied with 2 metres of cable

Cross-wall

Product	Size	Code
Senselec® TS cross wall 1 - 150mm touch sensor, blue	½" MBSP	SENS520020
Senselec® TS panel mount 1 - 50mm touch sensor, blue	½" MBSP	SENS520021
Senselec® TS cross wall 1 - 150mm touch sensor, red	½" MBSP	SENS520015
Senselec® TS panel mount 1 - 50mm touch sensor, red	½" MBSP	SENS520022

Solid-wall

Product	Size	Code
Senselec® TS solid wall touch sensor, blue	½" MBSP	SENS520005
Senselec® TS solid wall touch sensor, red	½" MBSP	SENS520001



Anti-Ligature Basin Spout

- Low smooth profile prevents ligature or grab points
- High quality chrome plating for long life
- 6 lpm flow regulators fitted for economy and stable flow
- Available in cross-wall and panel mounted variations
- Complete with unique anti-rotation plate to prevent movement and aid installation
- Removable spray grid for cleaning and disinfection

Product	Size	Code
Senselec® Panel mount anti ligature basin spout 1 - 50mm	½" MBSP	SENS510110



Washroom & Urinal Flush Controls

Governor Valve

- Compact unit, allowing easier installation in ceiling or wall cavities
- Can be installed in vertical or horizontal orientation: for maximum flexibility
- Adjustable flow rate, with Allen key supplied, for adaptation to suit system requirements
- Brass body with cover provides a robust and reliable unit, with no maintenance required
- No power supply required, making installation straightforward and no running costs

Product	Code
Pressure operated urinal flush valve	PUCF100001



£

SPECIFIERS TEXT: A flushing control device that operates mechanically and hydraulically by sensing changes in system pressure due to demand on connected water services. The flushing control device shall have an adjustable flow rate 0.5 - 4 lpm and be capable of vertical or horizontal installation.

Senselec® Wired Remote Control

- A complete integrated flushing system including solenoid valve, ball cock and overflow in one, for ease of installation
- Hands-free infra-red control to prevent cross contamination and provide ease of use
- Using the RWC controller, a hygiene flush can be set to prevent stagnation
- Cross-wall and panel mount options give installation flexibility
- Adjustable sensor detection range to suit all applications

Product	Code
Senselec® IR wired remote control	SENS250000



✓

Infra-Red (IR) Spares

Product	Size	Code
6V Latching Solenoid Valve	15mm	ZSOL500001
6V Lithium IR Battery		ZBAT252005
IR Battery Box		ZBAT252001
6V Transformer		ZRAN252005
12V Solenoid		ZSOL500005
12V Transformer		ZRAN252010
Senselec® IR sensor for Urinal		ZENS252005
Senselec® IR sensor for WC control		ZENS252020
IR Basin Sensor For Swan Neck/Caremix® and Senselec®		ZENS252015
Flow straightener for Swan Neck and Curve Basin Taps		ZBST100011



✓

Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

HEATING & COOLING DISTRIBUTION SYSTEMS

Innovative solutions for control and delivery of heating and hot water in multi-occupancy buildings.

- 51 Thermal Interface Units (TIUs)
- 52 Metering
- 53 Valves



FEATURED PRODUCT:

Tenant Valve Plus



The Tenant Valve Plus combines a number of functions in one compact self-contained unit to control and monitor water supply to multi-unit sites, such as flats or offices. It incorporates a ball type isolating valve, also approved as a stop valve, pressure reducing valve, double check valve, dual reading pressure gauge/test point and a connection point for optional addition of a Class 'A' water meter. Alternatively, an adaptor is available from RWC to fit a Class 'D' water meter. All components are accessible from one side of the valve, which is supplied with a moulded insulating cover.

Spotlight Features:



SINGLE UNIT CARTRIDGE DESIGN
ensures a quick and easy installation



PATENTED DUAL READING PRESSURE GAUGE
Displays both the inlet and outlet pressures.



Other Features & Benefits:

- A space saving, compact water monitoring unit, ideal for apartment blocks and multi-occupancy buildings
- Consists of ball type isolating valve, pressure reducing valve, double check valve, pressure gauge/test point and a connection point for RWC single jet water meter
- Reduced leakage potential and easy maintenance
- For use up to 16.0 bar pressure and temperatures up to 80°C
- Adjustable between 1.5-5.0 bar
- Supplied complete with 3/4" or 1" FBSP connections and a moulded insulation protection box with identity labels
- Anti-tamper security tag: wire from water meter can be affixed to valve body to prevent or detect tampering



Thermal Interface Unit (TIU)

Radiance Rapid Thermal Interface Unit

- Twin plate heat exchangers to generate instantaneous domestic hot water and indirect space heating
- Hydraulic connections are made through ball valves at the top of the unit
- Supplied with FBSP connections as standard
- Pipes can be run behind the back plate to allow for bottom connection (if required)
- Fully pre-assembled and leak tested
- Conforms to Building Regulations part L (2010)

Product	Type	Code
50kW DHW with thermostatic bypass valve, thermostatic heating control valve, modulation valve and ultrasonic heat meter	Instantaneous	RTIU702001
70kW DHM with thermostatic bypass valve, thermostatic heating control valve, tempering valve and ultrasonic heat meter	Instantaneous	RTIU702002



Radiance Swift Thermal Interface Unit

- Single plate heat exchanger to generate instantaneous domestic hot water with direct space heating
- Hydraulic connections are made through ball valves at the top of the unit
- Supplied with FBSP connections as standard
- Pipes can be run behind the back plate to allow for bottom connection (if required)
- Fully pre-assembled and leak tested
- Conforms to Building Regulations part L (2010)

Product	Type	Code
70kW DHW with thermostatic bypass valve, tempering valve and ultrasonic heat meter	Instantaneous	RTIU704001



Radiance Active Thermal Interface Unit

- Single plate heat exchangers to generate instantaneous domestic hot water only
- Hydraulic connections are made through ball valves at the top of the unit
- Supplied with FBSP connections as standard
- Pipes can be run behind the back plate to allow for bottom connection (if required)
- Fully pre-assembled and leak tested
- Conforms to Building Regulations part L (2010)

Product	Type	Code
50kW DHW with thermostatic bypass valve, tempering valve and ultrasonic heat meter	Instantaneous	RTIU706001



Radiance Spirit Thermal Interface Unit

- Designed to work in conjunction with a standard DHW storage cylinder
- A single plate heat exchanger unit, allows the pre-plumbed cylinder to be easily connected to a heat network
- Window allows for the heat meter to be read without the need to remove the cover
- Hydraulic connections are made through ball valves at the top of the unit
- Supplied with FBSP connections as standard
- Pipes can be run behind the back plate to allow for bottom connection (if required)
- Fully pre-assembled and leak tested
- Conforms to Building Regulations part L (2010)

Product	Type	Code
50kW DHW with thermostatic bypass valve, tempering valve and ultrasonic heat meter	Storage	RTIU705002



Metering

V3 Prepayment Unit

- Enables the billing and monitoring of up to three energy types
- Controlled with a multi-functional touch screen
- Uses the Zig Bee protocols, to form a local 'mesh-network' to establish connections back to a Gateway
- Full wireless remote monitoring and adding of customer payments
- Energy monitoring and reporting - ENE 3 compliant displays



Product	Code
V3 Pre-Pay & Billing Unit	HETM690100
GSM Gateway for V3 Pre-Pay Units	HETM690105

Version R+ Prepayment Unit

- Accepts pulse and M-Bus inputs
- Back lit, multifunction display
- Key-pad input (all inputs are encrypted to prevent fraud)
- Easy retro-fit into legacy systems
- Wireless communication directly to and from the unit
- Tamper alerts



Product	Code
Wireless Prepayment Unit	HETM690003

Heat Meters

- Records all accounting data for measuring energy consumption in heating/cooling systems
- Utilise innovative ultrasonic technology
- Recording saved for last 24 months
- Rapid, reliable data transfer
- Easy to use, removable multi-function energy calculator with large display
- Conforms to MID class 2
- Heat meters include M-Bus for automated remote reading



Product	Size	Code
Ultrasonic Heat Meter with M-Bus	DN15 3/4" X 110mm	HETM600001
Ultrasonic Heat Meter with M-Bus	DN20 1" x 130mm	HETM600011
Mechanical Heat Meter	DN15 3/4" X 110mm	HETM600002

Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

Valves

Tenant Valve Plus

- A space saving, compact water monitoring unit, ideal for apartment blocks and multi-occupancy buildings
- Consists of ball type isolating valve, pressure reducing valve, double check valve, test point and a connection point for RWC single jet water meter
- Also includes a unique, patented double reading pressure gauge to monitor both inlet and outlet pressures
- Single cartridge unit design ensures a quick and easy installation, reduced leakage potential and easy maintenance, saving cost
- Supplied pre-insulated further reducing installation time and cost
- For use up to 16.0 bar pressure and temperatures up to 85°C
- Adjustable between 1.5 - 6.0 bar
- Adaptor available to allow for installation of class 'D' meter suitable for use as a primary charging meter
- Supplied complete with either 3/4" or 1" FBSP connections and a moulded insulation protection box

Product	Size	Code
Tenant Valve Plus	3/4"	TVAP201001
Tenant Valve Plus	1"	TVAP201005

SPECIFIERS TEXT: A self contained control manifold incorporating, in the following order, an extended lever isolating ball valve, a cartridge type pressure reducing valve complying to BSEN 1567, pressure gauge, a water meter connection point and a double check valve. The pressure gauge shall be double reading to show both inlet and outlet pressure. The double check valve shall be removable for servicing. The assembly shall be supplied in a purpose built insulated cover and all components shall be accessible from one side of the valve.



Tenant Valve Spares

Product	Code
Class D water meter adaptor	TADP200075
Dual reading pressure gauge for Tenant Valve Plus	GAGE201001
Class 'A' cold water meter cartridge	WATM110700
Class 'A' hot water meter cartridge	WATM110750
Retrofit clip-on pulse output cap	PCAP110700
Replacement one-piece cartridge for Tenant Valve Plus	REDC320002
Double check valve assembly for Tenant Valve Plus	TCHK201001
Spare insulation for Tenant Valve Plus	INSU201001



Heatguard® UFH

- High flow rates - suitable for systems up to 250sqm
- Quick reaction to supply temperature changes, keeps system temperatures stable
- User adjustable between 35 - 60°C to be suitable for all types of floor
- Compression type connections for ease of installation
- Lockable temperature adjustable mechanism to prevent tampering

Product	Size	Code
Heatguard® UFH Blending Valve	22mm	HEAT219058
Heatguard® UFH Blending Valve	28mm	HEAT115002
Service Kit		SKIT980021

SPECIFIERS TEXT: Thermostatic mixing valve to BS1415 Pt2, in 28mm or 22mm compression connections for underfloor heating systems up to 250 sq meters (Select appropriate range code).



Valves

Harron Valve (Combined Thermal Balancing Valve / Pressure Reducing Valve)

- Single unit cartridge design ensures a quick and easy installation
- Reduces design complexity and avoids installation error
- Reduced leakage potential and easy maintenance, saving cost
- Supplied pre-insulated further reducing installation time and cost
- Easy temperature adjustment between 40 - 65°C with tamperproof cap
- Built-in disinfection function to protect against Legionella
- Dry-fit thermometer - no need to drain the system down
- High flow rate design
- 'Lift and turn' mechanism for ease of pressure adjustment
- One piece easiset cartridge with fully serviceable strainer
- Also available with SharkBite® Metal Push-fit connections for even quicker installation

Product	Size	Code
Harron Valve (PRV/TBV)	½"	TREG200001
Harron Valve (PRV/TBV)	¾"	TREG200002
Harron Valve with SharkBite® connectors	15mm pushfit	SBTREG200001
Harron Valve with SharkBite® connectors	22mm pushfit	SBTREG200002
Spare Temperature Gauge		GAGE100060
Service kit		SKIT100060
Spare insulation case	½"	INSU200001
Spare insulation case	¾"	INSU200002
Replacement cartridge	¾"	REDC320002
Spare Pressure Gauge	¼" MBSP back inlet	GAGE250017

SPECIFIERS TEXT: A (insert applicable size, ½" or ¾") combination pressure reducing and thermostatic regulating valve. The pressure reducing valve must be one piece cartridge style construction, low noise design with a lift and turn lockable adjustment mechanism and a pre-fitted pressure gauge. The thermal balancing valve function includes a disinfection function, dry fit thermometer, pre-fitted insulation case, and identity tag. The valve must be WRAS approved to UK water regulations, adjustable between 40°C and 65°C, have Viton o-ring seals and no internal rubber seat. Ref TREG200 series from Reliance UK

**Safe T Leakage Protection System**

- Monitors system flow rates and times to identify leaks and isolates the system
- Holiday mode intensifies monitoring
- Multitude of programming options to suit all applications
- Optional floor ensor to detect even small leaks
- Docking point allows connection of other controls such as water filters, quickly and easily
- Minimises water damage if a leak occurs
- Universal flange allows for vertical or horizontal pipe installations
- Alarm can be set up for audio alert
- Battery or mains supply (with back-up battery)
- Low voltage supply

Product	Inlet Sizes	Code
Safe T leakage protection system		PROT150001
Universal flange	¾"	DRUF500001
Universal flange	1"	DRUF500002
Universal flange	1¼"	DRUF500003



Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

PLUMBING SYSTEMS

SharkBite[®], slimline, metal, push-fit plumbing system suitable for all domestic and commercial applications.



FEATURED PRODUCT:

SharkBite® Pushfit Plumbing Solutions



SharkBite® fittings are engineered to provide an extremely fast, secure and reliable method of joining Copper, Chromed Copper, PEX, Polybutylene and Carbon Steel pipework. All fittings are demountable and can be reused when required.

The easy installation method greatly reduces installation time and a secure, sealed joint is always achieved. The bodies are manufactured from ultra-low lead DZR brass and pressure rated to 10 bar at 120°C. Fittings are available in 7 popular sizes from 10mm up to 54mm and are WRAS approved.

Spotlight Features:



GRAB-RING

The sharp stainless steel teeth of the internal grab ring bite into the pipe once pushed into the fitting, gripping it tightly. The watertight seal is created by the specially formulated material of the o-ring which compresses to create a perfect seal. A SharkBite® demount tool can be used to remove a fitting and it is immediately reusable



DZR BRASS BODY

All SharkBite® fittings are manufactured from a premium quality Dezincification Resistant Alloy (DZR) with an ultra low lead content (maximum 0.2%), helping installers and specifiers deliver a high level of drinking water quality which meets the European Union Drinking Water Directive (98/83/EC).

Other Features & Benefits:

- Manufactured from ultra-low lead DZR brass
- Demountable and instantly re-usable
- Fully rotatable once installed
- Electrically continuous
- Compatible with the five main types of plumbing pipe; Copper, Chromed Copper, PEX, Polybutylene and Carbon Steel
- Rated to 10bar at 120oC
- WRAS approved

Chrome Plated DZR Brass Fittings (Rated to 120°C at 10.0 bar)

SharkBite® Chrome Plated Coupling

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Coupling	10	15mm	SB0115CP



SharkBite® Chrome Plated 90° Elbow

Product	MOQ/ Pk Size	Size	Code
Chrome Plated 90° Elbow	10	15mm	SB0215CP



SharkBite® Chrome Plated Equal Tee

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Equal Tee	10	15mm	SB0315CP



SharkBite® Chrome Plated Male Connector

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Male Connector	5	15mm x 1/2" BSP	SB111515MTC



SharkBite® Chrome Plated Female Connector

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Female Connector	5	15mm x 1/2" BSP	SB111515FCP



SharkBite® Chrome Plated 90° Street Elbow

Product	MOQ/ Pk Size	Size	Code
Chrome Plated 90° Street Elbow	5	15mm	SB0215STCP



SharkBite® Chrome Plated Male 90° Elbow

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Male 90° Elbow	5	15mm x 1/2" BSP	SB121515MCP



SharkBite® Chrome Plated Female 90° Elbow

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Female 90° Elbow	5	15mm x 1/2" BSP	SB121515FCP



SharkBite® Chrome Plated Female Branch Tee

Product	MOQ/ Pk Size	Size	Code
Chrome Plated Female Branch Tee	10	15mm x 1/2" BSP	SB03151515FCP



Chrome Plated DZR Brass Fittings (Rated to 120°C at 10.0 bar)


SharkBite® Chrome Plated End Stop

Product	MOQ/ Pk Size	Size	Code
Chrome Plated End Stop	10	15mm	SB0415CP



SharkBite® Pushfit to Female BSP Flexible Connectors

Product	MOQ/ Pk Size	Size	Code
Pushfit to Female BSP Flexible Connector - 300mm	1	15mm x 1/2" BSP	SB231530015F
Pushfit to Female BSP Flexible Connector - 300mm	1	15mm x 1/2" BSP	SB231550015F
Pushfit to Female BSP Flexible Connector - 300mm	1	15mm x 3/4" BSP	SB231530020F
Pushfit to Female BSP Flexible Connector - 300mm	1	15mm x 3/4" BSP	SB231550020F
Pushfit to Female BSP Flexible Connector - 300mm	1	22mm x 3/4" BSP	SB232230020F
Pushfit to Female BSP Flexible Connector - 300mm	1	22mm x 3/4" BSP	SB232250020F

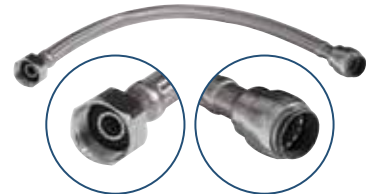

SharkBite® Pushfit to Pushfit Flexible Connector

Product	MOQ/ Pk Size	Size	Code
Pushfit to Pushfit Flexible Connector - 300mm	1	15mm x 15mm	SB231530015



DID YOU KNOW?

SharkBite® is:

- 2 x faster to install than press fit fittings
- 3 x faster to install than compression fittings
- 4 x faster than end feed fittings

Our new **product rating systems** allows you to find the **right product every time.**



PREMIUM



ADVANCED



ESSENTIALS

DZR Brass Fittings (Rated to 120°C at 10.0 bar)

SharkBite® Coupling

Product	MOQ/ Pk Size	Size	Code
Coupling	5	10mm	SB0110
Coupling	10	15mm	SB0115
Coupling	5	22mm	SB0122
Coupling	5	28mm	SB0128
Coupling	1	35mm	SB0135E
Coupling	1	42mm	SB0142E
Coupling	1	54mm	SB0154E



SharkBite® Reducing Coupling

Product	MOQ/ Pk Size	Size	Code
Reducing Coupling	5	15mm x 10mm	SB011510
Reducing Coupling	5	22mm x 15mm	SB012215
Reducing Coupling	1	28mm x 22mm	SB012822
Reducing Coupling	1	35mm x 28mm	SB013528E
Reducing Coupling	1	42mm x 35mm	SB014235E
Reducing Coupling	1	54mm x 42mm	SB015442E



SharkBite® Slip Coupling

Product	MOQ/ Pk Size	Size	Code
Slip Coupling	10	15mm	SB0115S
Slip Coupling	5	22mm	SB0122S
Slip Coupling	5	28mm	SB0128S
Slip Coupling	1	35mm	SB0135SE
Slip Coupling	1	42mm	SB0142SE
Slip Coupling	1	54mm	SB0154SE



SharkBite® 90° Elbow

Product	MOQ/ Pk Size	Size	Code
90° Elbow	5	10mm	SB0210
90° Elbow	10	15mm	SB0215
90° Elbow	5	22mm	SB0222
90° Elbow	5	28mm	SB0228
90° Elbow	1	35mm	SB0235E
90° Elbow	1	42mm	SB0242E
90° Elbow	1	54mm	SB0254E



SharkBite® 45° Elbow

Product	MOQ/ Pk Size	Size	Code
45° Elbow	10	15mm	SB0515
45° Elbow	5	22mm	SB0522
45° Elbow	5	28mm	SB0528
45° Elbow	1	35mm	SB0535E
45° Elbow	1	42mm	SB0542E
45° Elbow	1	54mm	SB0554E



DZR Brass Fittings (Rated to 120°C at 10.0 bar)

SharkBite® 90° Street Elbow

Product	MOQ/ Pk Size	Size	Code
90° Street Elbow	5	15mm	SB0215ST
90° Street Elbow	5	22mm	SB0222ST
90° Street Elbow	5	28mm	SB0228ST



SharkBite® 45° Street Elbow

Product	MOQ/ Pk Size	Size	Code
45° Street Elbow	5	15mm	SB0515ST
45° Street Elbow	5	22mm	SB0522ST
45° Street Elbow	5	28mm	SB0528ST



SharkBite® 90° Male Elbow

Product	MOQ/ Pk Size	Size	Code
90° Male Elbow	5	15mm x 1/2" BSP	SB121515M
90° Male Elbow	5	22mm x 3/4" BSP	SB122220M



SharkBite® 90° Female Elbow

Product	MOQ/ Pk Size	Size	Code
90° Female Elbow	5	15mm x 1/2" BSP	SB121515F



SharkBite® 90° Elbow with Backplate

Product	MOQ/ Pk Size	Size	Code
90° Elbow with Backplate	5	15mm x 1/2" BSP	SB121515FBP



SharkBite® Equal Tee

Product	MOQ/ Pk Size	Size	Code
Equal Tee	5	10mm	SB0310
Equal Tee	10	15mm	SB0315
Equal Tee	5	22mm	SB0322
Equal Tee	1	28mm	SB0328
Equal Tee	1	35mm	SB0335E
Equal Tee	1	42mm	SB0342E
Equal Tee	1	54mm	SB0354E



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

DZR Brass Fittings (Rated to 120°C at 10.0 bar)

SharkBite® Slip Tee

Product	MOQ/ Pk Size	Size	Code
Slip Tee	1	15mm	SB0315S
Slip Tee	1	22mm	SB0322S
Slip Tee	1	28mm	SB0328S
Slip Tee	1	35mm	SB0335SE
Slip Tee	1	42mm	SB0342SE
Slip Tee	1	54mm	SB0354SE



SharkBite® Female Branch Tee

Product	MOQ/ Pk Size	Size	Code
Female Branch Tee	10	15mm x 15mm x 1/2" BSP	SB03151515F



SharkBite® Reduced Branch Tee

Product	MOQ/ Pk Size	Size	Code
Reduced branch tee	1	22mm x 22mm x 10mm	SB03222210
Reduced branch tee	5	22mm x 22mm x 15mm	SB03222215
Reduced branch tee	5	28mm x 28mm x 15mm	SB03282815
Reduced branch tee	5	28mm x 28mm x 22mm	SB03282822
Reduced branch tee	1	35mm x 35mm x 15mm	SB03353515E
Reduced branch tee	1	35mm x 35mm x 22mm	SB03353522E
Reduced branch tee	1	35mm x 35mm x 28mm	SB03353528E
Reduced branch tee	1	42mm x 42mm x 22mm	SB03424222E
Reduced branch tee	1	42mm x 42mm x 28mm	SB03424228E
Reduced branch tee	1	42mm x 42mm x 35mm	SB03424235E
Reduced branch tee	1	54mm x 54mm x 28mm	SB03545428E
Reduced branch tee	1	54mm x 54mm x 35mm	SB03545435E
Reduced branch tee	1	54mm x 54mm x 42mm	SB03545442E



SharkBite® Reduced Run Tee

Product	MOQ/ Pk Size	Size	Code
Reduced run tee	5	22mm x 15mm x 22mm	SB03221522



SharkBite® Reduced Branch and Run Tee

Product	MOQ/ Pk Size	Size	Code
Reduced branch and run tee	5	22mm x 15mm x 15mm	SB03221515



SharkBite® Multi-Port Tee

Product	MOQ/ Pk Size	Size	Code
Multi-port tee	1	42mm	SB0342MPE
Multi-port tee	1	54mm	SB0354MPE



DZR Brass Fittings (Rated to 120°C at 10.0 bar)

SharkBite® Male Connector (Tapered Thread)

Product	MOQ/ Pk Size	Size	Code
Male Connector	5	15mm x 1/2" BSP	SB111515MT
Male Connector	5	22mm x 3/4" BSP	SB112220MT
Male Connector	1	28mm x 1" BSP	SB112825MT
Male Connector	1	35mm x 1 1/4" BSP	SB113532ME
Male Connector	1	42mm x 1 1/2" BSP	SB114240ME
Male Connector	1	54mm x 2" BSP	SB115450ME



SharkBite® Male Connector (Parallel Thread)

Product	MOQ/ Pk Size	Size	Code
Male Connector	5	15mm x 1/2" BSP	SB111515MP
Male Connector	5	22mm x 3/4" BSP	SB112220MP



SharkBite® Male Tank Connector

Product	MOQ/ Pk Size	Size	Code
Male Tank Connector	1	15mm x 1/2" BSP	SB111515MTC
Male Tank Connector	1	22mm x 3/4" BSP	SB112220MTC



SharkBite® Female Connector (Parallel Thread)

Product	MOQ/ Pk Size	Size	Code
Female Connector	5	15mm x 1/2" BSP	SB111515F
Female Connector	5	22mm x 3/4" BSP	SB112220F
Female Connector	1	28mm x 1" BSP	SB112825F
Female Connector	1	35mm x 1 1/4" BSP	SB113532FE
Female Connector	1	42mm x 1 1/2" BSP	SB114240FE
Female Connector	1	54mm x 2" BSP	SB115450FE



SharkBite® Tap Connector

Product	MOQ/ Pk Size	Size	Code
Tap Connector	5	15mm x 1/2" Loose Nut	SB141515
Tap Connector	5	22mm x 3/4" Loose Nut	SB142220



SharkBite® 90° Tap Connector Elbow

Product	MOQ/ Pk Size	Size	Code
90° Tap Connector Elbow	5	15mm x 1/2" Loose Nut	SB141515E



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

DZR Brass Fittings (Rated to 120°C at 10.0 bar)

SharkBite® End Stop

Product	MOQ/ Pk Size	Size	Code
End Stop	5	10mm	SB0410
End Stop	10	15mm	SB0415
End Stop	5	22mm	SB0422
End Stop	5	28mm	SB0428
End Stop	1	35mm	SB0435E
End Stop	1	42mm	SB0442E
End Stop	1	54mm	SB0454E



SharkBite® Straight Reducing Tails

Product	MOQ/ Pk Size	Size	Code
Straight Reducing Tails	5	15mm x 10mm	SB211510
Straight Reducing Tails	5	22mm x 15mm	SB212215
Straight Reducing Tails	5	28mm x 15mm	SB212815
Straight Reducing Tails	5	28mm x 22mm	SB212822



SharkBite® Single Branch Manifold Tee

Product	MOQ/ Pk Size	Size	Code
Single Branch Manifold Tee	1	22mm x 22mm x 10mm	SB01221022ST



SharkBite® Double Branch Manifold Tee

Product	MOQ/ Pk Size	Size	Code
Double Branch Manifold Tee	1	22mm x 22mm x 10mm x 10mm	SB0122101022ST



PEX Barrier Pipe & Pipe Liners

PEX Barrier Pipe (5 layer)

Product	MOQ/ Pk Size	Size	Code
PEX Pipe 25m coil	1	15mm	SBPXT1525
PEX Pipe 25m coil	1	22mm	SBPXT2225
PEX Pipe 25m coil	1	28mm	SBPXT2825
PEX Pipe 50m coil	1	15mm	SBPXT1550
PEX Pipe 50m coil	1	22mm	SBPXT2250
PEX Pipe 50m coil	1	28mm	SBPXT2850
PEX Pipe 3m straight length	20	15mm	SBPXT153
PEX Pipe 3m straight length	20	22mm	SBPXT223



PEX Pipe Liners

Product	MOQ/ Pk Size	Size	Code
PEX pipe liners	100	15mm	SBPXL15
PEX pipe liners	100	22mm	SBPXL22
PEX pipe liners	100	28mm	SBPXL28



Accessories

Depth Marker/Disconnecting Clip

Product	MOQ/ Pk Size	Size	Code
Depth marker/disconnecting clip	1	10mm	SB2910
Depth marker/disconnecting clip	1	15mm	SB2915
Depth marker/disconnecting clip	1	22mm	SB2922
Depth marker/disconnecting clip	1	28mm	SB2928



Disconnecting Clip

Product	MOQ/ Pk Size	Size	Code
Disconnecting clip	1	35mm	SB2935
Disconnecting clip	1	42mm	SB2942
Disconnecting clip	1	54mm	SB2954



Depth Marker/Disconnecting Clip Set

Product	MOQ/ Pk Size	Size	Code
Depth marker/disconnecting clip set	1	10-28mm	SB2910-28



Depth Marker

Product	MOQ/ Pk Size	Size	Code
Depth marker	1	35-54mm	SB2935-54



Disconnecting Tongs

Product	MOQ/ Pk Size	Size	Code
Disconnecting tongs	1	10mm	SB3010
Disconnecting tongs	1	15mm	SB3015
Disconnecting tongs	1	22mm	SB3022
Disconnecting tongs	1	28mm	SB3028



Our new product rating systems allows you to find the right product every time.



PREMIUM



ADVANCED



ESSENTIALS

Accessories & Manifolds

PEX Pipe Bend Former

Product	MOQ/ Pk Size	Size	Code
PEX pipe bend former	1	15mm	SBPXFB15
PEX pipe bend former	1	22mm	SBPXFB22



Pipe Scribing Tool

Product	MOQ/ Pk Size	Size	Code
Pipe Scribing Tool	1	15-54mm	SB3415



Silicone Lubricant Grease

Product	MOQ/ Pk Size	Size	Code
Silicone Lubricant Grease	1	100g	SBSG



Potable Water Manifolds

- Pushfit connections for ease of installation
- All inlet sizes are 3/4" MBSP, outlet sizes are 15mm push-fit or Euroconus
- Universal product, suitable for hot or cold water systems
- Indicators to identify the fixtures supplied by each port
- DZR brass body
- Union connection allows multiple manifolds to be connected together

Product	MOQ/ Pk Size	Size	Code
2 port water manifold	1	15mm pushfit	MANA500522
3 port water manifold	1	15mm pushfit	MANA500523
4 port water manifold	1	15mm pushfit	MANA500524
2 port water manifold Euroconus	1	3/4" MBSP	MANA500552
3 port water manifold Euroconus	1	3/4" MBSP	MANA500553
4 port water manifold Euroconus	1	3/4" MBSP	MANA500554



#			
100 & 101 Replacement Relief Valve Cartridges	31		
100 Series Sealed Heating System High Capacity Pressure Relief Valves	32		
101 Series Sealed Heating System Pressure Relief Valves	32		
102 Series Potable Water Pressure Relief Valves	34		
102 and 104 Series Replacement Pressure Relief Cartridge	33		
104 Series High Capacity Potable Water Pressure Relief Valves	33		
107 Series Potable Water Pressure Relief Valves	33		
200 Series Caremix® Shower Panel	44		
312 Compact Series	13		
314 Series Dial-up	13		
503 ER Series Exposed Timeflow Showers	46		
606 and 506 Series Timeflow Basin and Bib Taps	43		
700 Series Anti-Vandal Showerheads	47		
706 and Timeflow Basin and Bib Taps	43		
712 Series Knee Operated Timeflow Valve	43		
4000s Timeflow Basin and Mixer Tap	43		
A			
Alpa Series Timeflow Mixer Showers	46		
Anti-Legionella Valve	29		
Anti-Ligature Basin Spout	47		
Anti-Ligature Showerheads	47		
Aquasystem® Expansion Vessel Mounting Brackets	29		
Aquasystem® Replaceable Membrane Heating Expansion Vessels	27		
Aquasystem® Replaceable Membrane Potable Water Expansion Vessels	27		
Ausimix® Compact	7		
Ausimix® Compact Telescopic	7		
Auto Filling Group	31		
Automatic Air Vent	35		
Automatic Anti-vacuum Valves	35		
C			
Caremix® E3 Exposed Sequential Shower	41		
Caremix® C3 Concealed Sequential Shower	41		
Caremix® Prime H3 Deck Mounted 2 Hole TMV3 Approved Thermostatic Taps	40		
Caremix® Prime S3 Monobloc TMV3 Approved Thermostatic Taps	39		
Caremix® Prime T3 Wall Mounted TMV3 Approved Thermostatic Taps	39		
Caremix® Tap Spares	40		
Caremix® Thermostatic Cartridge	40		
Cash Acme® Pressure & Temperature Relief Valves	36		
Commercial 315i Series	15		
Commercial / Industrial 6247 Series	15		
Contact Cylinder Thermostat	25		
Cylinder Thermostats	25		
D			
Depth Marker	64		
Depth Marker/Disconnecting Clip	64		
Depth Marker/Disconnecting Clip Set	64		
Differential By-Pass Valves	35		
Disconnecting Clip	64		
Disconnecting Tongs	64		
DL400 SE Slimline Timeflow Shower Panels	44		
Draincock with Street End	18		
E			
Easifit® Sealed System Kit	30		
Easifit® Water Heater Kit	30		
Easiset® 320 Series	14		
Electronic Room Thermostats	26		
Euromixer®	8		
F			
Filling Loop with Street Ends	31		
Filmaster® Filling Loop	31		
Floguard® Double Check Valve	22		
Floguard® Single Check Valve	21		
Floreng® Isolating Strainer / Valve	18		
FVMX Pressure and Temperature Relief Valve	36		
G			
Governor Valve	51		
H			
Harron Valve (Combined Thermal Balancing Valve / Pressure Reducing Valve)	54		
Heat Meters	552		
Heatguard® Bath Shower Mixer Valves	42		
Heatguard® Bar Showers	42		
Heatguard® BF2-2 Sports	8		
Heatguard® Dual	5		
Heatguard® Dual Spares	5		
Heatguard® Planar	9		
Heatguard® Style	6		
Heatguard® Tempering Valve	9		
Heatguard® TMV3-8	5		
Heatguard® TMV3-8 Spares	5		
Heatguard® UFH	53		
Hoseguard Bib Taps	22		
I			
Infra-Red (IR) Spares	48		
M			
Masterguard	9		
Mini Isolating Brass Ball Valves	17		
N			
Nickel Plated Brass Ball Valves for Water	17		
P			
PEX Barrier Pipe (5 layer)	65		
PEX Pipe Liners	65		
Potable Water Shock Arrestor	29		
Predator PRV	14		
Pressure Gauge	16		
Programmable Room Thermostats	26		
Promix® 22-2	7		
Protecto® YC	34		
R			
Radiance Active Thermal Interface Unit	51		
Radiance Rapid Thermal Interface Unit	51		
Radiance Spirit Thermal Interface Unit	51		
Radiance Swift Thermal Interface Unit	51		
Reduced Pressure Zone (RPZ) Backflow Preventers	21		
Replacement Pressure Reducing Valve Cartridges	15		
Reliance 100 Single Jet Water Meter - Dry Dial, Cold (up to 30°C)	19		
Reliance 100 Single Jet Water Meter - Dry Dial, Hot (up to 90°C)	19		
Reliance 120 Single Jet Water Meter - Dry Dial, Cold (up to 30°C)	19		
Reliance 125 Single Jet water Meter - Pulse Output, Hot (up to 90°C)	20		
Reliance 210 Multi Jet water Meter - Dry Dial, Cold (up to 30°C)	20		
Reliance 210 Multi Jet water Meter - Pulse Output, Dry Dial, Cold (up to 30°C)	20		
Reliance Concealed Timeflow Shower	46		
Reliance Exposed Timeflow Showers	46		
Reliance Shower Kit	42		
Reliance Timeflow Bib Taps	43		
S			
Safe T Leakage Protection System	54		
Sealed Heating System Pressure Relief Valve	31		
Senselec® TS2 Switch Options	47		
Senselec® Wired Remote Control	48		
SharkBite® 45° Elbow	59		
SharkBite® 45° Street Elbow	60		
SharkBite® 90° Elbow with Backplate	60		
SharkBite® 90° Elbow	59		
SharkBite® 90° Female Elbow	60		
SharkBite® 90° Male Elbow	60		
SharkBite® 90° Street Elbow	60		
SharkBite® 90° Tap Connector Elbow	62		
SharkBite® Appliance Valve	18		
SharkBite® Chrome Plated 90° Elbow	57		
SharkBite® Chrome Plated 90° Street Elbow	57		
SharkBite® Chrome Plated Coupling	57		
SharkBite® Chrome Plated End Stop	58		
SharkBite® Chrome Plated Equal Tee	57		
SharkBite® Chrome Plated Female 90° Elbow	57		
SharkBite® Chrome Plated Female Branch Tee	57		
SharkBite® Chrome Plated Female Connector	57		
SharkBite® Chrome Plated Male 90° Elbow	57		
SharkBite® Chrome Plated Male Connector	57		
SharkBite® Coupling	59		
SharkBite® Double Branch Manifold Tee	63		
SharkBite® Double Check Valve	22		
SharkBite® End Stop	63		
SharkBite® Equal Tee	60		
SharkBite® Female Branch Tee	61		
SharkBite® Female Connector (Parallel Thread)	62		
SharkBite® Male Connector (Parallel Thread)	62		
SharkBite® Male Connector (Tapered Thread)	62		
SharkBite® Male Tank Connector	62		
SharkBite® Multi-Port Tee	61		
SharkBite® Pushfit to Female BSP Flexible Connectors	58		
SharkBite® Pushfit to Pushfit Flexible Connector	58		
SharkBite® Quarter Turn Ball Valve Nickel Plated	16		
SharkBite® Quarter Turn DZR Brass Ball Valve	16		
SharkBite® Reducing Coupling	59		
SharkBite® Reduced Branch and Run Tee	61		
SharkBite® Reduced Branch Tee	61		
SharkBite® Reduced Run Tee	61		
SharkBite® Service Valve	18		
SharkBite® Single Branch Manifold Tee	63		
SharkBite® Slip Coupling	59		
SharkBite® Slip Tee	61		
SharkBite® Stop Cocks	18		
SharkBite® Straight Reducing Tails	63		
SharkBite® Tap Connector	62		
SharkBite® Washing Machine Valve	18		
Shield	40		
Shower Panel Optional Extras	46		
Shower Panel Finishing Profile System	45		
T			
Tenant Valve Plus	53		
Tenant Valve Spares	53		
Thermal Balancing Valves	10		
Thermometers and Probes	10		
Timeflow Control Tool Kit	44		
Touchscreen Programmable Thermostats	25		
TPR15 & TPR22 Pressure & Temperature Relief Valves	36		
TPR28 Pressure & Temperature Relief Valve	36		
Tundishes	22		
Two and Three Port Zone Valves	25		
V			
V3 Prepayment Unit	52		
Version R+ Prepayment Unit	52		
W			
Wiring Centre	25		

ACCREDITED AND ASSURED.

The Reliance aim is to fill our customers with complete confidence. One of the ways we achieve this, aside from providing an innovative product range and market-leading service, is to be an accredited manufacturer to the following International Standards:



BS EN ISO 9001

This quality management system helps us to continually monitor and manage across our business, enabling consistent performance and service at all times.



BUILD CERT

Product certification from WRc NSF, an independent UK testing organisation with over 75 years' experience. It ensures all our products are of the same high quality.



BS EN ISO 14001

An internationally accepted environmental standard. Enables us to control, monitor and reduce waste and emissions as well as conform to legal and regulatory requirements.



TMV2

TMV2 approval is for the domestic thermostatic sector and uses BS EN 1111 and BS EN1287 as a basis for the thermostatic valves performance testing.



ISO 22301

The international standard for business continuity enables us to understand threats. It helps protect our business and ensures we can recover from any disruptive incidents.



TMV3

TMV3 approval is for the Healthcare and Commercial thermostatic sector. As the basis for this testing, it uses the NHS specification D08.



BSI CE

The BSI CE mark scheme is about compliance. It confirms that our products conform with all applicable European Directives and Regulations.



THE WATER TECHNOLOGY LIST

This government list promotes products that encourage sustainable water use and rewards businesses for investing in them through the Enhanced Capital Allowance scheme.



BSI KITEMARK

This product certification scheme confirms that a product or service conforms to a particular standard and is subject to regular inspection.



WRAS

WRAS approval ensures that any water fitting receiving water from the UK public mains water supply does not cause waste, misuse, undue consumption or contamination.



RELIANCE: THE WORLD LEADER IN WATER CONTROL.

Reliance Worldwide Corporation (UK) Ltd is a division of Reliance Worldwide Corporation Limited, a global leader in water control systems and plumbing for domestic, commercial and industrial applications.

With operations in six locations – Australia, United States, United Kingdom, Europe, New Zealand and Canada – ***we're truly a global brand.***

From our centre of excellence in Worcestershire, home to a team of specialists, we can offer the best of both worlds - international experience and an in-depth understanding of all sectors in the UK.

BETTER CONNECTED.

At Reliance our reputation is not only built on our heritage, products and achievements, it is also down to providing unbeatable levels of customer service.

Both our Customer Support Team and Technical Support Team are readily available to help with product advice, technical enquiries and any installation issues. Throughout the UK, our Sales Managers are also on-hand to discuss product specifications with you.

Whatever support you need, or for further information about a project enquiry, please contact us:

**Reliance Worldwide
Corporation (UK) Ltd
Worcester Road,
Evesham,
Worcestershire.
WR11 4RA**

www.rwc.co.uk

Freephone:

0800 389 5931

From outside UK:

+44 (0) 1386 712400

Freefax:

0800 389 5932

From outside UK:

+44 (0) 1386 712401



Reliance Worldwide Corporation (UK) Ltd
 Worcester Road, Evesham, Worcestershire. WR11 4RA. UK

Tel: +44 (0)1386 712 400 Fax: +44 (0)1386 712 401



Reliance Worldwide Corporation (UK) Ltd are proud of our heritage as a leading industry product innovator. A large number of our products are protected by patents or registered trademarks. In the interests of continuous product improvement Reliance Worldwide Corporation (UK) Ltd reserve the right to alter specifications as necessary. E&OE. Prices are effective from 1st May 2015 and supercede all previous prices. Copyright ©2015 Reliance Worldwide Corporation (UK) Ltd. All trademarks and registered trademarks are the property of Reliance Worldwide Corporation (UK) Ltd. All rights reserved.



www.rwc.co.uk

RELIANCE

Reliance Worldwide Corporation (UK) Ltd are pleased to be members of the following trade associations:

