
HOST's mixer unit explained



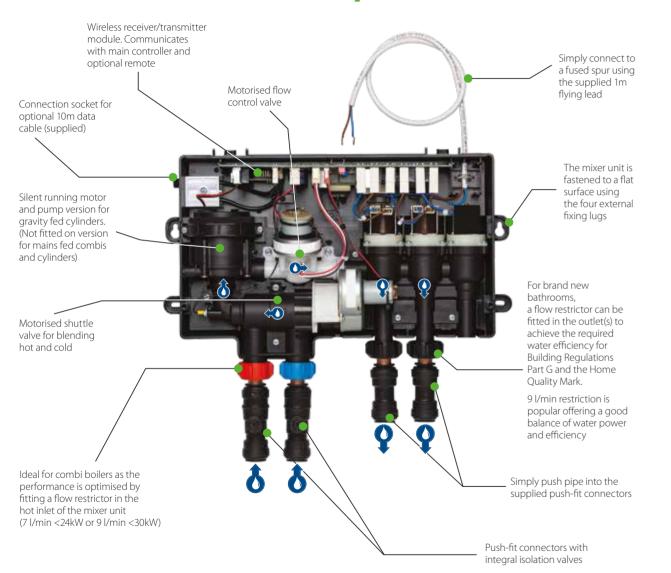

See you first thing Britain

Triton Showers

Triton Road Nuneaton

Warwickshire

Installer Hotline

+44 (0) 2476 378 320

CV11 4NR

Customer Services: +44 (0) 2476 372 222

Brochure enquiries

+44 (0) 24 7632 4460

Facebook chat:

m.me/TritonShowers

technical@tritonshowers.co.uk serviceenquiries@tritonshowers.co.uk

tritonshowers.co.uk











Triton Showers is a division of Norcros Group (Holdings) Limited Triton Showers, Triton Road, Nuneaton, Warwickshire CV11 4NR

It is our policy to improve the design and specification of our products and we reserve the right to depart from the design given without prior notice. All information in this brochure may be subject to change after the date of printing, E&OE











Best selling combinations

HOST Cloud Grey

Digital Shower



HOST Black Digital Shower





Single Outlet All In One Packs



Wall Fed Ceiling Fed Alternative riser rails included

Pumped for gravity low pressure

HOSDMCRRCIRS HOSDMCRRCIRSP

Multi Outlet All In One Packs



Wall Fed and Ceiling Fed

Wall Fed and Ceiling Fed

HOSDMCRRCIRM HOSDMCRRCIRMP Pumped for gravity low pressure

HOSDMCHHSQM HOSDMCHHSQMP Pumped for gravity low pressure

Individual Accessories





optional Warm Up

HOSDMRSS



Plan & locate

Just follow these simple steps

STEP 1: Know your hot water system





Mains Unvented Cylinder


HOST Mixer unit without pump for mains high pressure

Gravity Fed Cylinder



HOST Mixer unit with pump

for gravity low pressure







HOST Mixer unit with single outlet for single showerhead






HOST Mixer unit with multiple outlets for two showerheads



STEP 3: Agree on where to put the mixer box

Choose the location of your mixer box.

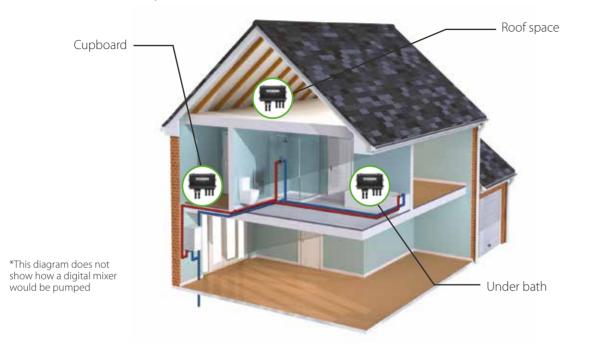

STEP 4: Choose the accessories for your selected outlet(s)

Examples:



Ceiling Fed Only





Ceiling & Wall Fed

Installing the HOST Example shown is of the mixer box in the loft:



The through the ceiling riser rail allows pipe to be routed



This can be combined with a through the ceiling fixed head



Only the mixed water outlet pipes needs routing to the



Connect pipe to the supplied push-fit fitting



The performance is optimised for combi boilers by fitting the supplied flow restrictor



The mixer unit can be connected to the control using the 10 meter cable supplied



The control cable plugs into the shower controller



Alternatively the shower controller can be wireless, powered by three AA batteries

