

# T80 PRO-FIT

## Everything you would expect and more...

### Pro connect

- |                  |   |
|------------------|---|
| Retro-fit        | Generous footprint will cover the original T80Z Fast-Fit as well as most competitor models        |
| Entry points     | 8 water and 8 cable entry points  |
| Dual water inlet | For easy pipe connection either left or right, copper or plastic, compression or popular push fit |
| Easier fitting   | Wire free cover fit<br>Popular right inlet supplied open<br>More wall fixing holes                |

### Pro durable

- |                   |   |
|-------------------|---|
| Dura-Flow™        | Triton's newly designed Dura-Flow™ heater technology helps to reduce the build up of limescale by up to 80%, extending the life of the shower and is <b>ideal for use in hard water areas</b> |
| Shower head       | A large diameter, 5 position Dura-Flow™ shower head that is easy to clean, with rub-clean nozzles and removable sprayplate  |
| Product guarantee | Backed by Triton's 2 year <b>full</b> parts and labour guarantee  |

### Pro flexible

- |                |   |
|----------------|---|
| Universal rail | Longer length riser rail up to 620mm ideal for replacement installations                        |
| Rail brackets  | Both fixing brackets are adjustable to fit any existing holes – no need for additional drilling |
| Shower hose    | Longer 1.5m anti-twist Dura-Flow™ hose  |

### Pro finish

- |                |   |
|----------------|---|
| Universal rail | Fully adjustable riser rail for even overhang with Clip-Fit tray  |
| Separate trims | Entry trims can easily be removed and fitted with the shower in situ <b>without tools</b> allowing a cleaner finish |



## Lasts 80% longer!

Patented **Dura-Flow™ Heater Can** reduces the build up of limescale - helping the shower last up to 80% longer



For more information call **+44 (0) 247 637 8320**

[tritonshowers.co.uk/pro-fit](http://tritonshowers.co.uk/pro-fit)



YouTube

# T80 Pro-Fit Shower

## Shower unit

Power ratings	7.5kW	8.5kW	9.5kW	10.5kW	Eco 8.5kW
Energy rating	<b>A</b>	<b>A</b>	<b>A</b>	<b>A</b>	<b>A</b>
kWh per annum	477	482	483	480	482
Nominal Flow Rate*	3.99	4.52	5.05	5.58	4.52


\* Outlet temp set 42°C - inlet temp set 15°C - operating voltage 240

Dura-Flow™	Longer life anti-scale heater
Dual water connection	15mm wide compression** or push-fit
Swingfit™ terminal block	16mm max cable
Water pressure min	1bar (running at 8 l/min)***
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

\*\* Nut and olive supplied if using compression fitting

\*\*\*10.5kW : 1.5 bar (running at 11 l/min)

## Cable and water entry points

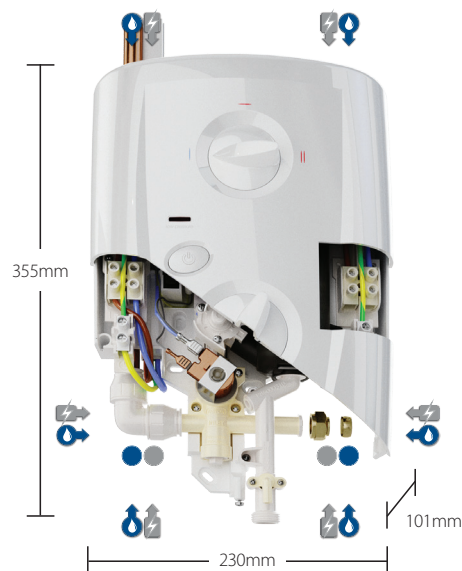

### Diagram Key:



## Shower kit

- Longer 670mm rail allows direct replacement of any standard riser rail (480mm to 620mm fixing centres)  
Rail height is adjustable to ensure even rail overhang
- Both riser rail wall brackets are adjustable offering the flexibility to:
  - Fix on the grout lines
  - Fix in the centre of tiles
  - Reuse any existing fixing holes
- Twist lock height adjustable handset holder
- Optional Clip-Fit bottle tray supplied



## Shower Head & Hose

The new **Dura-Flow™** shower head features rub clean nozzles and a removable spray plate for cleaning the waterways.



The new **Dura-Flow™** anti-twist 1.5m hose prevents twists and kinks. The hose swivels independently of the cone, even when the cone is screwed in place.



For more information call  
**+44 (0) 247 637 8320**

[tritonshowers.co.uk/pro-fit](http://tritonshowers.co.uk/pro-fit)



### Product codes

T80 PRO-FIT 7.5kW	SP8007PF
T80 PRO-FIT 8.5kW	SP8008PF
T80 PRO-FIT 9.5kW	SP8009PF
T80 PRO-FIT 10.5kW	SP8001PF
T80 PRO-FIT ECO 8.5kW	ECO8008PF