Share

We would love to see your new boiler and heating system.

@HeatingYourHome

(f) Worcester Bosch UK

@WorcesterBosch

Worcester Bosch

Worcester Bosch

Cotswold Way Warndon Worcester WR4 9SW

worcester-bosch.co.uk

Calls to and from Bosch Thermotechnology Ltd may be recorded for training and quality assurance purposes. Worcester Bosch is a brand name of Bosch Thermotechnology Ltd. This brochure is accurate at the date of printing, but may be superseded and should be disregarded if specification and/or appearances are changed in the interest of continued improvement. The statutory rights of the consumer are not affected.



Part No. 8 716 119 85 Issue A 05/19







DISCOVER THE GREENSTAR STYLE RANGE





STYLE IS HERE

The Greenstar Style range has arrived, and it is beautiful. Now available with a choice of high gloss black or white, our top of the range Style boilers have been created for when only the very best is good enough. Yes, it's a boiler, but not as you know it.








THE FUTURE IS STYLE

For more than 50 years, we've innovated to create boilers to warm your home. Now, building upon the foundations of our award-winning Greenstar boiler range, we've created a stunning, design-led boiler for the heart of your home without any compromise on quality or performance.

Our Style boilers feature innovative new technology designed to keep your system pressure to the optimum level. Our optional unique Intelligent Filling System constantly monitors your heating system's pressure and, if ever this drops, it will automatically re-fill your system. This takes away the need to manually top up your boiler's system pressure.



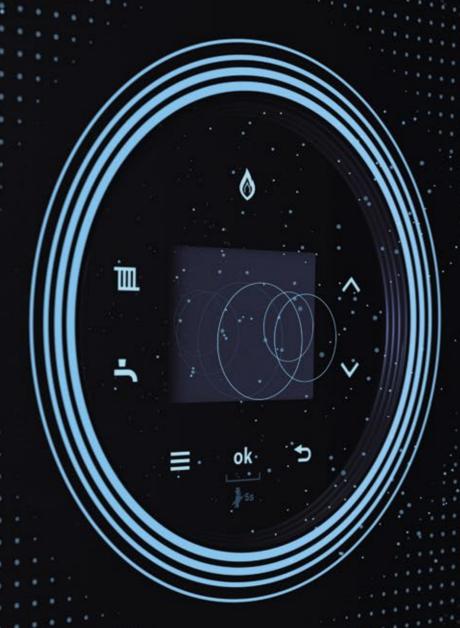

STYLE IS POWER

Packed with innovative new features which help keep your boiler performing at its best, Style is developed to suit virtually any domestic heating requirement. It is our most powerful and connected wall hung boiler yet, and comes with the renowned reliability of Worcester Bosch technology.

The Style range is capable of delivering up to 50kW with the highest hot water flow rates of any wall hung combi-boiler on the market. This makes the Greenstar Style boiler range perfect for homes of any size, with the power to efficiently heat large homes with two or more bathrooms.



BUILT TO SUIT YOUR LIFESTYLE

The Style range has been designed to suit your lifestyle, as well as your home. With an easy-to-use full colour display, and connectivity with the wireless Bosch EasyControl, you have the power to effortlessly control your home's heating and hot water from anywhere.



QUIETLY KEEPING YOU WARM

Not only does the Style range feature a fantastic new design, more power and greater connectivity, we've even made it one of our quietest boilers too.

Style has been designed to sit comfortably in any room of your home to keep you cosy in the cold winter months, and you may not even know it's there.



FUTURE PROOF YOUR HOME

We want you to have the same confidence in our boilers as we do, which is why we are offering up to a **10 year guarantee*** on the entire Greenstar Style range.





CONTROLS

The Greenstar Style range is compatible with a range of controls, offering you simple solutions to manage the heating and hot water to suit your home.

WIRELESS BOSCH EASYCONTROL

The wireless Bosch EasyControl is a smart internet-connected room thermostat that connects directly to your smartphone. It allows you to control your heating and hot water on-the-go.

GREENSTAR COMFORT + RANGE

The Greenstar Comfort is an intelligent programmer and a room thermostat allowing access to control functions from a single, easily accessible location.



THE BOILER, BUT NOT AS YOU KNOW IT

TECHNICAL SPECIFICATIONS

| | Combi | | | | | System | |
|--|-------------|--------------|--------------|--------------|--------------|------------|------------|
| STYLE | 3 0 k W | 3 5 k W | 4 0 k W | 4 5 k W | 5 0 k W | 3 0 k W | 3 5 k W |
| Maximum horizontal flue lengths (60/100) | 17m | 10m | 11m | 8m | 9m | 17m | 10m |
| Maximum vertical flue lengths (60/100) | 21m | 14m | 15m | 12m | 15m | 21m | 14m |
| Clearance above flue | 170/210mm* | 170/210mm* | 170/210mm* | 170/210mm* | 170/210mm* | 170/210mm* | 170/210mm* |
| Clearance (sides) | 5mm | 5mm | 5mm | 5mm | 5mm | 5mm | 5mm |
| Clearance (below) | 200mm | 200mm | 200mm | 200mm | 200mm | 200mm | 200mm |
| Clearance (front) | 600mm** | 600mm** | 600mm** | 600mm** | 600mm** | 600mm** | 600mm** |
| Width | 440mm | 440mm | 440mm | 440mm | 440mm | 440mm | 440mm |
| Height | 780mm | 780mm | 780mm | 780mm | 780mm | 780mm | 780mm |
| Depth | 365mm | 365mm | 365mm | 365mm | 365mm | 365mm | 365mm |
| Flow rate at the hot water tap (35°C) | 12.3 l/min^ | 14.3 l/min^ | 16.4 l/min^ | 18.3 l/min^ | 20.3 l/min^ | | |
| Flow rate at the hot water tap (40°C) | 10.7 l/min# | 12.5 l/min# | 14.3 l/min# | 16.1 l/min# | 17.9 l/min# | | |
| Output kW to central heating | 3kW - 30kW | 3.5kW – 35kW | 3.5kW – 35kW | 3.5kW – 35kW | 3.5kW – 35kW | | |

Height for either 60/100 flue or 80/125 flue.

^{* 20}mm from a removable cupboard door. 600mm from a fixed surface for servicing. Same clearances for ventilated and unventilated compartmen

Values for industry comparison:

Designed operational flow rate. Maximum flow rates will only be achieved if sufficient dynamic pressure is available. Maximum flow is subject to a tolerance of 15%. Refer to installation manuals for more information.