

AR2 SHXMTFF C

ARTISAN Shower Range Artisan Thermostatic Surface Mounted Bar Shower Valve with Adjustable Riser & Fast Fit Connections



Features:

- All in one box - pack includes bar shower valve, hose, adjustable riser rail and a rub-clean anti-limescale multi function handset so nothing to buy separately
- Supplied with a fast fit Wallmount 12 fixing kit with built-in front of wall isolation valves on both the hot and cold feed, making it simple to fit, maintain and replace.
- Safe Touch technology ensures the valve stays cool to the touch while in use
- Multi function rub clean handset - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Adjustable fixing brackets on riser rail enables existing screw holes to be used

Product Certifications:



WRAS Certificate No: 2005902
WRAS Expiry Date: 31/05/2025




TMV2 Cert No: NSF2262/0720
TMV2 Expiry Date: 16/07/2025



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Thermostatic
Maximum Hot Water Supply Temperature °C:	60
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, Ideally Balanced
Working Pressure Range:	Min: 0.1 Bar, Max: 5 Bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

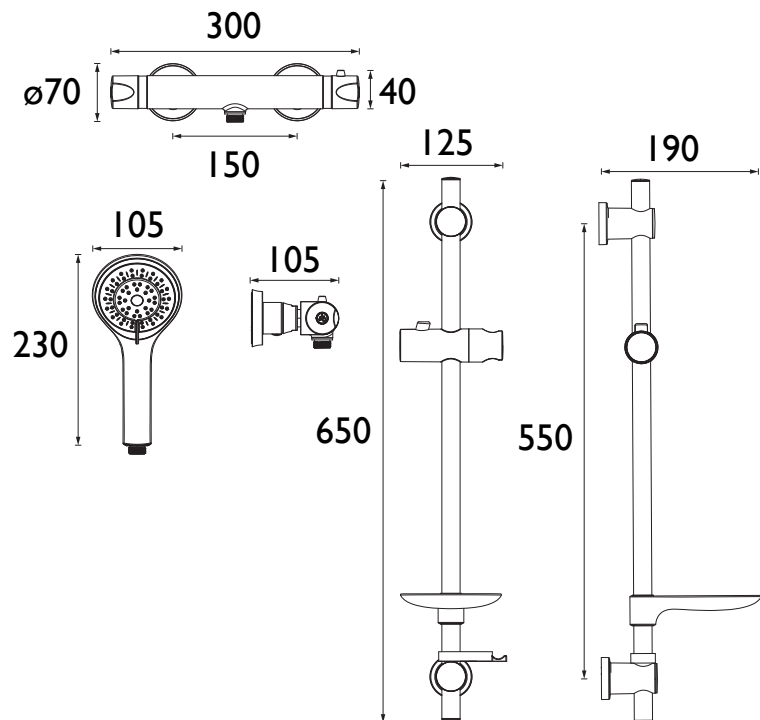

Flow Rates (l/min)

System Pressure (bar)	0.1	0.5	1	2	3	5
Handset Flow Mode 1 only	1.2	3.4	5.3	7.5	9.4	11
Through Handset (mixed)	1.4	4	6.2	8.9	11	13
Handset Flow Mode 2 only	1.13	3.3	5.1	7	8.7	10.1

TECHNICAL DATA SHEET



BRISTAN

D15