

Environmental

TITAN TruckMaster

Fuel On The Move



Sustainable, Reliable, Affordable



Kingspan®

TruckMaster

Technical Details and Specifications

Light and portable, the ADR approved Titan TruckMaster from Kingspan Environmental, simply straps onto the back of a truck, enabling you to carry the diesel you need to refuel on-site. That means swifter, safer delivery - saving valuable time and money.

ADR Approved (International Carriage of Dangerous Goods by Roads)

The TruckMaster is a UN approved IBC (Intermediate Bulk Container) suitable for the transportation of diesel fuels. Check for the following certification, where **__** refers to the month and year of manufacture.

Unique Design

The TruckMaster has been designed to make the transport and delivery of fuel direct to working vehicles and machinery easier, safer and more cost effective. Easily lifted by the four lifting eyes or a fork lift, the TruckMaster unit fits onto the back of a small truck and is secured to standard flatback commercial vehicles in a number of different ways. When empty, it can be lifted with ease and securely fitted to the vehicle.

Safest Option

With the Titan TruckMaster, on-site safety is assured as fuels can be transported without the requirement of heavy steel drums or jerry cans, which are liable to spill. It is advised that under the ADR regulations that the TruckMaster shall be withdrawn from service after 5 years, and after 2 1/2 years in service shall undergo a full inspection and leakproof test.

Robust Manufacture

The Titan TruckMaster, is designed for long life and heavy work. Made from UV-protected medium-density polyethylene, it is both light and tough.

All necessary fittings are neatly stored in the cavity under the lockable lid. TruckMaster and all fittings are guaranteed for a period of one year from the date of purchase, when utilised under normal working conditions, i.e. fair wear and tear.

Go Anywhere

TruckMaster gives fuel delivery a new mobility. It gives the efficiency of an oil tanker in miniature, yet it reaches places a tanker cannot go. Rough land, building sites, narrow access areas and farms offer no problem to a TruckMaster because the unit can be mounted onto the back of the smallest truck. In addition, the unique internal baffle wall minimises fuel surge when the TruckMaster is in transit.


The TruckMaster ADR carriage requirements offer flexibility in that the vehicle driver does not require an ADR training certificate, the vehicle does not need orange hazard plates and the driver does not require a TREM (Road Transport Emergency) card and Transport Document*. However, the driver is required under ADR regulations to carry a two kilogram fire extinguisher.

Note: If the TruckMaster is used as a static dispensing tank, it must be stored in a bunded area to comply with applicable Control of Pollution Regulations (only applicable in GB).
*Provided the consignor is carrying the fuel on his own behalf.

TruckMaster Portable Fuel Dispensing Systems - ADR CERTIFICATION



Light and portable, the ADR approved Titan TruckMaster from Kingspan Environmental simply straps on to the back of a truck, enabling you to carry the diesel you need to refuel on-site. That means swifter, safer delivery - saving you valuable time and money.

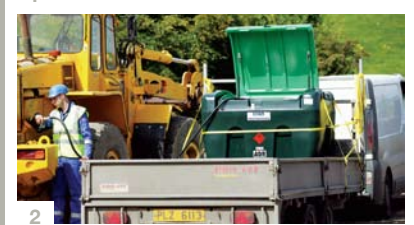

1. Agricultural application 2. Industrial application 3. Construction application



TM430 EQUIPMENT

TM430	Q 31H2V...NL R TruckMaster 413/0/575
Capacity	430 litres/ 95 gallons
Top Length	1156 mm
Base Length	980 mm
Width	842 mm
Height	860 mm



TM900	Q 31H2V...NL R TruckMaster 448/0/1237
Capacity	900 litres/ 198 gallons
Top Length	1400 mm
Base Length	1100 mm
Width	1000 mm
Height	1200 mm



TM900 EQUIPMENT

Features:

- UN approved IBC suitable for the transport of fuels
- Designed to fit between the wheel arches of a crewcab vehicle, but can also be strapped onto a flat back truck or trailer
- Easily lifted when full, by forklift or four lifting eyes
- Little fuel surge with unique internal baffle wall
- Necessary fittings are stored neatly under the lockable lid

Product includes:

- 12 volt fuel pump (40 lpm) c/w 4mtr battery leads
- 4mtr x 3/4" delivery hose
- Auto shut-off nozzle
- Lid with lock and keys
- Contents level gauge
- 2" vent
- 2" BSP fill point
- Flowmeter (optional extra)
- **TM900ADV** - TruckMaster 900 Advanced can be specified with a 56 LPM pump

Please contact the sales office for more information on lubricating or hydraulic oil versions as pump and flowmeter options differ from diesel versions.

Benefits:

- Gives fuel delivery a new mobility - reaches places a tanker or bowser cannot go
- Fuel can be transported without the need for steel drums or jerry cans, which are liable to spill
- No rust, condensation or contamination like traditional steel bowzers, as unit is completely sealed
- Manufactured from UV-protected medium density polyethylene, it is both light and tough

With the TITAN FuelMaster from Kingspan Environmental you are not only preventing any potential spill, you are also protecting your diesel by housing equipment and access to the fuel within a lockable cabinet. With the ever increasing fuel prices, supplies are now regularly targeted by thieves. Fuel dispensing tanks in commercial, agricultural or industrial properties must be bunded. This is enforced in the GB (by the Control of Pollutions Regulations) and encouraged in Ireland by County Councils to protect the environment and your business. Large fines and the cost of a clean-up can be severe. So its time to protect and improve your fuel storage.



FM1300

Capacity 1300 Litres/
285 Gallons
Length 1890 mm
Width 1245 mm
Height 1785 mm

OFCERT No. 0642090326



FM2500

Capacity 2500 Litres/
550 Gallons
Length 2430 mm
Width 1420 mm
Height 1855 mm

OFCERT No. 0642069817



FM3500

Capacity 3500 Litres/
755 Gallons
Length 2080 mm
Width 2680 mm
Height 1900 mm

OFCERT No. 0642030601



FM5000

Capacity 5000 Litres/
1100 Gallons
Length 3140 mm
Width 2070 mm
Height 2335 mm

OFCERT No. 0642070130



FMV5000

Capacity 5000 Litres/
1100 Gallons
Length 2230 mm
Width 2890 mm
Height 2420 mm

OFCERT No. 0642060236



FMV9000

Capacity 9000 Litres/
1980 Gallons
Length 3580 mm
Width 2460 mm
Height 2950 mm

OFCERT No. PENDING



FMV10000

Capacity 10000 Litres/
2200 Gallons
Length 3300 mm
Width 2800 mm
Height 3007 mm

OFCERT No. 0642119613
PLASTIC INNER

- Flowmeters fitted as standard, except on FM1300 and FM2500 (fitted as optional extra)
- The new TITAN Tank Monitoring system (TMS Diesel) is available as an optional extra more information is available from the TITAN Sales Office.
- OFTEC approved
- 10 year guarantee on bunded tank. 1 year guarantee on pump and accessories
- Installed simply on a firm, level, non-combustible base on the ground extending 300mm on all sides.
- Suitable for Agricultural Fuel Oil (Class A2) and Gas/Oil/Diesel (Class D)
- Comes as standard with
 - Watchman technology to monitor oil levels securely
 - Pump
 - Auto shut off nozzle
 - Delivery hose
 - SpillStop overfill prevention device
 - Lockable Cabinet
 - Includes a bund alarm



Kingspan Environmental Limited

Titan Environmental Team

180 Gilford Road, Portadown, Co. Armagh, Northern Ireland, BT63 5LF
Sales Hotline Telephone: 028 3836 4444 Telephone: 028 3836 4400 Fax: 028 3836 4445

Dundalk Road, Carrickmacross, Co. Monaghan, Ireland
Telephone Lo-Call (ROI): 1890 201 690 Fax Lo-Call (ROI): 1890 201 699

Email: sales@titanenv.com www.titanenv.com or visit our company website www.kingspanenv.com

